



Cert. n° 0545



[www.eurovent-certification.com](http://www.eurovent-certification.com)

Compliant with ERP 2015  
Regulation (EU) No. 327/2011

# High Pressure Fan Coil Units Maestro MTL Maestro MTL-ECM

TECHNICAL GUIDE

# Maestro MTL

## **INDICE**

### **MTL 1÷5**

|                                                     |                |
|-----------------------------------------------------|----------------|
| • Introduction                                      | <b>Page 3</b>  |
| • Construction features                             | <b>Page 3</b>  |
| • Dimensions,<br>weight and water content           | <b>Page 4</b>  |
| • Operating limits                                  | <b>Page 5</b>  |
| • EUROVENT Certification                            | <b>Page 6</b>  |
| • Main performance<br>and technical characteristics | <b>Page 7</b>  |
| • Cooling emission tables                           | <b>Page 10</b> |
| • Heating emission tables                           | <b>Page 14</b> |
| • Correction factors tables                         | <b>Page 16</b> |
| • Water side pressure drop                          | <b>Page 18</b> |
| • Accessory air side pressure drop                  | <b>Page 18</b> |
| • Wall electronic controls                          | <b>Page 32</b> |
| • Wall electronic control accessories               | <b>Page 34</b> |
| • Controls and units <b>MB version</b>              | <b>Page 55</b> |
| • Management system for a network<br>of fan coils   | <b>Page 58</b> |
| • Accessories (optional)                            | <b>Page 61</b> |

### **MTL 6÷7**

|                                                                       |                |
|-----------------------------------------------------------------------|----------------|
| • Introduction                                                        | <b>Pag. 19</b> |
| • Construction features                                               | <b>Pag. 19</b> |
| • Dimensions,<br>weight and water content                             | <b>Pag. 20</b> |
| • Operating limits                                                    | <b>Pag. 21</b> |
| • Main performance<br>and technical characteristics                   | <b>Pag. 22</b> |
| • Cooling emission tables                                             | <b>Pag. 23</b> |
| • Heating emission tables                                             | <b>Pag. 25</b> |
| • Available pressure for <b>Maestro 64</b>                            | <b>Pag. 26</b> |
| • Pressure drop for <b>Maestro 6</b>                                  | <b>Pag. 26</b> |
| • Available pressure <b>Maestro 74</b>                                | <b>Pag. 27</b> |
| • Pressure drop <b>Maestro 7</b>                                      | <b>Pag. 27</b> |
| • Correction diagram                                                  | <b>Pag. 28</b> |
| • Power absorbed (Watt)<br>dipending on the variation of the air flow | <b>Pag. 30</b> |
| • Water side pressure drop                                            | <b>Pag. 31</b> |
| • Wall electronic controls                                            | <b>Pag. 32</b> |
| • Wall electronic control accessories                                 | <b>Pag. 33</b> |
| • Controls and units <b>MB version</b>                                | <b>Pag. 55</b> |
| • Management system for a network<br>of fan coils                     | <b>Pag. 58</b> |
| • Accessories (optional)                                              | <b>Pag. 61</b> |

### **MTL-ECM 1÷4**

|                                                     |                |
|-----------------------------------------------------|----------------|
| • Introduction                                      | <b>Pag. 35</b> |
| • Construction features                             | <b>Pag. 35</b> |
| • Dimensions,<br>weight and water content           | <b>Pag. 36</b> |
| • Operating limits                                  | <b>Pag. 37</b> |
| • EUROVENT Certification                            | <b>Pag. 38</b> |
| • Main performance<br>and technical characteristics | <b>Pag. 39</b> |
| • Cooling emission tables                           | <b>Pag. 42</b> |
| • Heating emission tables                           | <b>Pag. 46</b> |
| • Correction factors tables                         | <b>Pag. 48</b> |
| • Water side pressure drop                          | <b>Pag. 52</b> |
| • Accessory air side pressure drop                  | <b>Pag. 52</b> |
| • Wall electronic controls                          | <b>Pag. 53</b> |
| • Wall electronic control accessories               | <b>Pag. 54</b> |
| • Controls and units <b>MB version</b>              | <b>Pag. 55</b> |
| • Management system for a network<br>of fan coils   | <b>Pag. 58</b> |
| • Accessories (optional)                            | <b>Pag. 61</b> |



Sabiana take part to the Eurovent program of fan coil performance certification. The official figures are published in the web site [www.eurovent-certification.com](http://www.eurovent-certification.com). The tested performances are:

- Cooling total emission at the following conditions:
  - Water temperature +7°C E.W.T. +12°C L.W.T.
  - Entering air temperature +27°C dry bulb +19°C wet bulb
- Heating emission (2 pipe units) at the following conditions:
  - Water temperature +45°C E.W.T. +40°C L.W.T.
  - Entering air temperature +20°C
- Available pressure
- Fan absorption

- Cooling sensible emission at the following conditions:
  - Water temperature +7°C E.W.T. +12°C L.W.T.
  - Entering air temperature +27°C dry bulb +19°C wet bulb
- Heating emission (4 pipe units) at the following conditions:
  - Water temperature +65°C E.W.T. +55°C L.W.T.
  - Entering air temperature +20°C
- Water pressure drop
- Sound power

Following many years of experience in the field of heating and air conditioning, Sabiana has developed a range of Maestro fan coils for concealed installation and connection to a duct system.

Sizes 1÷5 supply a consistent air flow with static pressure up to 160 Pa to fit most conditions, with the combination of either 3 or 4 row heating coils and 2 or 4 pipe configurations with additional heating coil.

The fan assembly has 5 speeds.

## Compliant with ERP 2015 Regulation (EU) No. 327/2011

---

### Construction features

---

#### CASING

It is made with 1,0 mm galvanized steel for sizes 1-2-3 and with 1,2 mm galvanized steel for sizes 4-5, insulated with 10 mm polyolefin (PO) foam (class M1).

#### FAN ASSEMBLY

Consists of quiet centrifugal fans with two impellers and a directly driven single phase, five speed motor, 230V 50Hz, with capacitor, insulation class F.


#### COIL

It is manufactured from drawn copper tube and the aluminium fins are mechanically bonded onto the tube by an expansion process.

The Maestro range Sabiana (sizes 1÷5) is available with the combination of either 3 or 4 row coils with the possibility to add a 1 or 2 row coil (3+1, 4+1, 3+2, 4+2 versions for 4 pipe systems).

**The connections are on the left hand side looking from the air inlet of the unit (see picture and drawing to the next page).** On request the connections can be moved to the other side.

The heat exchanger is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.

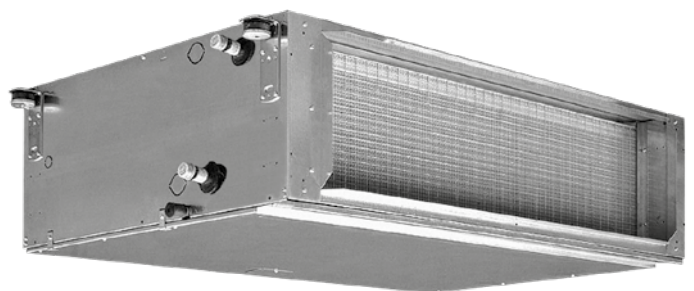



#### FILTER

The filter is made of polypropylene cellular fabric regenerating filter. The filter frame of galvanized steel is inserted into sliding guides fastened to the internal structure for easy insertion and removal of the filter.



#### CONDENSATE COLLECTION TRAY

It is made from galvanized steel insulated with 3 mm polyolefin (PO) foam (class M1).

**Left connections (standard)**

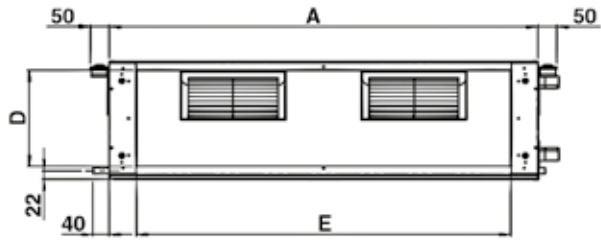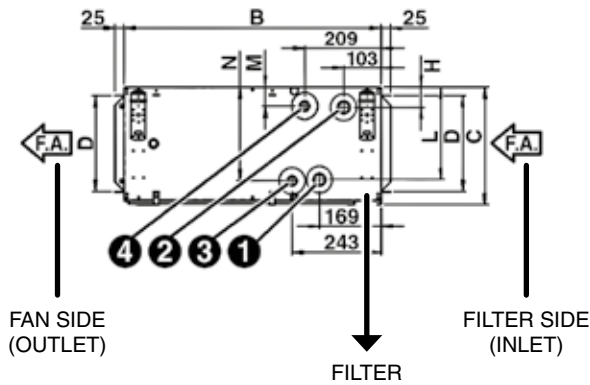

**Right connections (on request)**

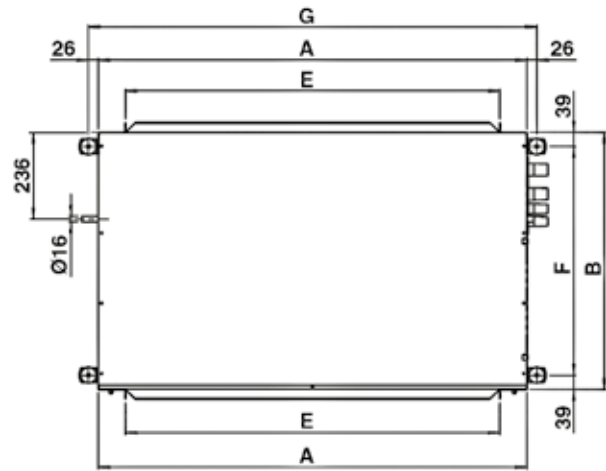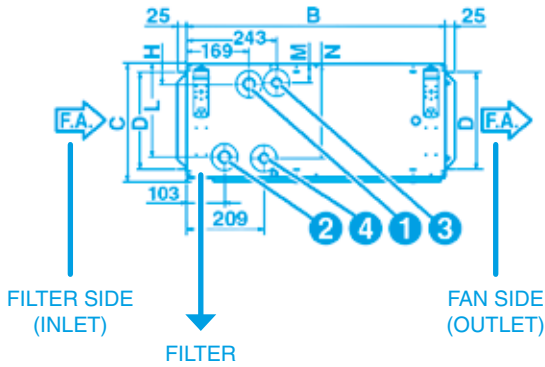

**STANDARD**


FAN SIDE (OUTLET)



Air flow

(coil connections on the left looking the air direction)

FILTER SIDE (INLET)

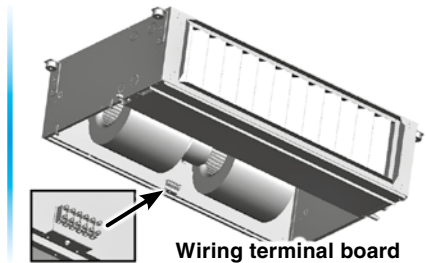

Wiring terminal board



| MODEL        | Dimensions (mm) |     |     |     |      |     |      |    |     |    |     | Coil   |        |            |       |
|--------------|-----------------|-----|-----|-----|------|-----|------|----|-----|----|-----|--------|--------|------------|-------|
|              |                 |     |     |     |      |     |      |    |     |    |     | Main   |        | Additional |       |
|              | A               | B   | C   | D   | E    | F   | G    | H  | L   | M  | N   | ① IN   | ② OUT  | ③ IN       | ④ OUT |
| <b>MTL 1</b> | 1133            | 698 | 310 | 255 | 991  | 620 | 1185 | 54 | 245 | 50 | 249 | 3/4"   | 3/4"   | 3/4"       | 3/4"  |
| <b>MTL 2</b> | 1133            | 698 | 310 | 255 | 991  | 620 | 1185 | 54 | 245 | 50 | 249 | 1"     | 1"     | 3/4"       | 3/4"  |
| <b>MTL 3</b> | 1133            | 698 | 360 | 305 | 991  | 620 | 1185 | 54 | 295 | 50 | 299 | 1"     | 1"     | 3/4"       | 3/4"  |
| <b>MTL 4</b> | 1445            | 853 | 360 | 293 | 1302 | 775 | 1497 | 58 | 291 | 54 | 295 | 1 1/4" | 1 1/4" | 1"         | 1"    |
| <b>MTL 5</b> | 1445            | 853 | 435 | 368 | 1302 | 775 | 1497 | 58 | 367 | 54 | 370 | 1 1/4" | 1 1/4" | 1"         | 1"    |

| MODEL        | Weight without packaging (kg) |      |      |    |      |      | Weight with packaging (kg) |      |      |    |      |      | Water content (l) |     |     |     |
|--------------|-------------------------------|------|------|----|------|------|----------------------------|------|------|----|------|------|-------------------|-----|-----|-----|
|              | 3R                            | 3+1R | 3+2R | 4R | 4+1R | 4+2R | 3R                         | 3+1R | 3+2R | 4R | 4+1R | 4+2R | 3R                | 4R  | 1R  | 2R  |
| <b>MTL 1</b> | 45                            | 48   | 50   | 47 | 50   | 51   | 48                         | 51   | 53   | 50 | 53   | 54   | 2,0               | 2,6 | 0,9 | 1,5 |
| <b>MTL 2</b> | 46                            | 50   | 52   | 48 | 51   | 53   | 49                         | 53   | 55   | 51 | 54   | 56   | 2,9               | 3,7 | 1,1 | 1,8 |
| <b>MTL 3</b> | 54                            | 58   | 60   | 56 | 60   | 62   | 57                         | 61   | 63   | 59 | 63   | 65   | 3,5               | 4,6 | 1,4 | 2,4 |
| <b>MTL 4</b> | 75                            | 80   | 83   | 78 | 83   | 86   | 79                         | 84   | 87   | 82 | 87   | 90   | 4,7               | 6,0 | 2,0 | 3,2 |
| <b>MTL 5</b> | 85                            | 90   | 94   | 88 | 94   | 98   | 89                         | 94   | 98   | 92 | 98   | 102  | 5,7               | 7,1 | 2,7 | 4,1 |

|                      |                                            |                                        |
|----------------------|--------------------------------------------|----------------------------------------|
| <b>Water circuit</b> | Maximum water pressure: 1000 kPa (10 bars) | MIN. entering water temperature: +5°C  |
|                      |                                            | MAX. entering water temperature: +80°C |
| <b>Air flow</b>      | Suitable relative humidity 15-75%          | MIN. entering air temperature: +6°C    |
|                      |                                            | MAX. entering air temperature: +40°C   |
|                      |                                            | MAX. leaving air temperature: +50°C    |
| <b>Supply</b>        | Single phase 230V 50Hz                     |                                        |

## Motor electrical data (max. absorption)

| <b>MODEL</b>                |   | <b>MTL 1</b> | <b>MTL 2</b> | <b>MTL 3</b> | <b>MTL 4</b> | <b>MTL 5</b> |
|-----------------------------|---|--------------|--------------|--------------|--------------|--------------|
| <b>230/1</b><br><b>50Hz</b> | W | 240          | 340          | 523          | 680          | 885          |
|                             | A | 1,09         | 1,60         | 2,45         | 3,20         | 4,01         |

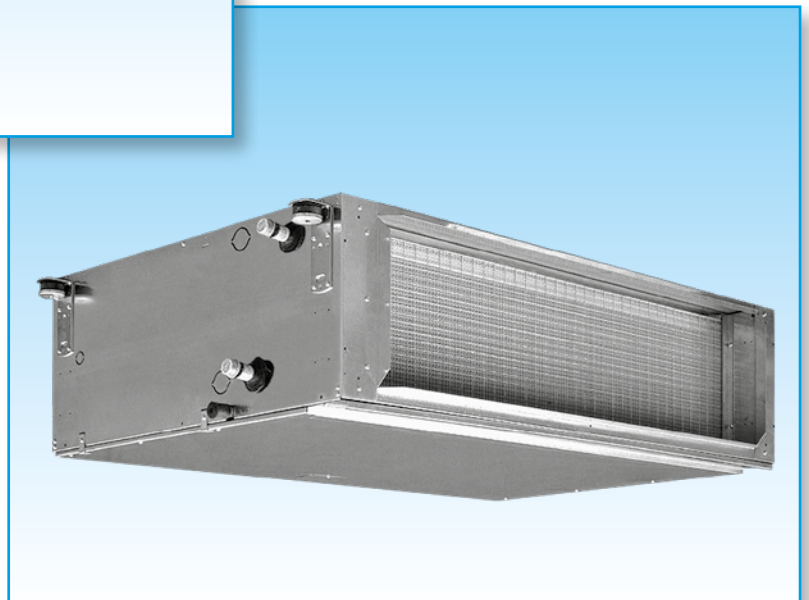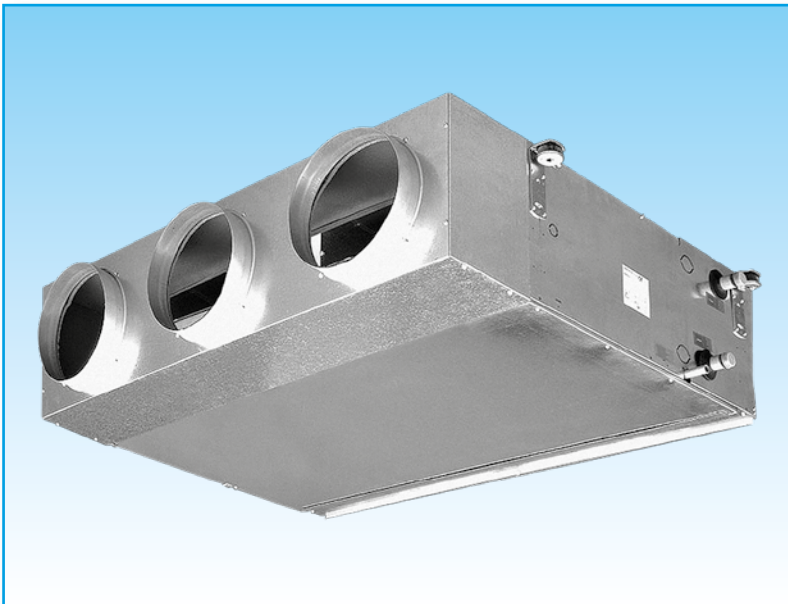

**2 pipe units.**

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
 Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
 Water temperature + 45°C E.W.T. + 40°C L.W.T.

| MODEL                                     | MTL 14 |      |      | MTL 24 |      |      | MTL 34 |       |       | MTL 44 |       |       | MTL 54 |       |       |       |
|-------------------------------------------|--------|------|------|--------|------|------|--------|-------|-------|--------|-------|-------|--------|-------|-------|-------|
|                                           | 1      | 3    | 5    | 1      | 3    | 5    | 1      | 3     | 5     | 1      | 3     | 5     | 1      | 3     | 5     |       |
| Speed (E)                                 |        |      |      |        |      |      |        |       |       |        |       |       |        |       |       |       |
| Air flow (E)                              | m³/h   | 790  | 1125 | 1410   | 840  | 1410 | 1825   | 1710  | 2075  | 2440   | 2070  | 2580  | 3020   | 2740  | 3280  | 3850  |
| Available pressure (E)                    | Pa     | 25   | 50   | 75     | 15   | 50   | 80     | 30    | 50    | 70     | 35    | 50    | 70     | 35    | 50    | 70    |
| Cooling total emission (E)                | kW     | 4,17 | 5,21 | 5,92   | 4,99 | 7,01 | 8,15   | 8,71  | 9,76  | 10,71  | 10,90 | 12,40 | 13,60  | 14,54 | 16,19 | 17,76 |
| Cooling sensible emission (E)             | kW     | 3,25 | 4,26 | 5,03   | 3,66 | 5,48 | 6,62   | 6,67  | 7,68  | 8,65   | 8,25  | 9,70  | 10,90  | 11,21 | 12,80 | 14,37 |
| Heating (E)                               | kW     | 4,98 | 6,44 | 7,67   | 5,57 | 8,27 | 10,10  | 10,20 | 11,75 | 13,19  | 12,79 | 14,92 | 16,53  | 17,67 | 20,32 | 22,93 |
| Dp Cooling (E)                            | kPa    | 5,1  | 7,6  | 9,6    | 6,9  | 12,7 | 16,8   | 16,0  | 19,8  | 23,4   | 13,9  | 17,7  | 20,9   | 13,3  | 16,3  | 19,4  |
| Dp Heating (E)                            | kPa    | 5,2  | 8,2  | 11,3   | 6,2  | 17,0 | 18,3   | 15,6  | 23,0  | 24,8   | 13,4  | 17,7  | 21,3   | 14,2  | 18,3  | 22,8  |
| Fan (E)                                   | W      | 115  | 155  | 185    | 170  | 230  | 285    | 350   | 420   | 470    | 390   | 490   | 570    | 500   | 617   | 760   |
| Sound power level outlet (E)              | dB(A)  | 44   | 52   | 58     | 44   | 56   | 61     | 57    | 62    | 65     | 59    | 63    | 66     | 63    | 67    | 70    |
| Sound power level inlet + radiated (E)    | dB(A)  | 47   | 55   | 60     | 47   | 59   | 64     | 60    | 64    | 67     | 61    | 65    | 68     | 65    | 69    | 72    |
| Sound pressure level outlet (*)           | dB(A)  | 35   | 43   | 49     | 35   | 47   | 52     | 48    | 53    | 56     | 50    | 54    | 57     | 54    | 58    | 61    |
| Sound pressure level inlet + radiated (*) | dB(A)  | 38   | 46   | 51     | 38   | 50   | 55     | 51    | 55    | 58     | 52    | 56    | 59     | 56    | 60    | 63    |

(\*\*)

**4 pipe units.**

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
 Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
 Water temperature + 65°C E.W.T. + 55°C L.W.T.

| MODEL                                     | MTL 14+1 |      |      | MTL 24+1 |      |      | MTL 34+1 |      |      | MTL 44+1 |       |       | MTL 54+1 |       |       |       |
|-------------------------------------------|----------|------|------|----------|------|------|----------|------|------|----------|-------|-------|----------|-------|-------|-------|
|                                           | 1        | 3    | 5    | 1        | 3    | 5    | 1        | 3    | 5    | 1        | 3     | 5     | 1        | 3     | 5     |       |
| Speed (E)                                 |          |      |      |          |      |      |          |      |      |          |       |       |          |       |       |       |
| Air flow (E)                              | m³/h     | 770  | 1090 | 1350     | 840  | 1390 | 1775     | 1680 | 2045 | 2390     | 2055  | 2545  | 2960     | 2700  | 3245  | 3800  |
| Available pressure (E)                    | Pa       | 25   | 50   | 75       | 15   | 50   | 80       | 30   | 50   | 70       | 35    | 50    | 70       | 35    | 50    | 70    |
| Cooling total emission (E)                | kW       | 4,09 | 5,11 | 5,79     | 4,99 | 6,96 | 8,03     | 8,61 | 9,67 | 10,58    | 10,85 | 12,34 | 13,46    | 13,75 | 15,31 | 16,73 |
| Cooling sensible emission (E)             | kW       | 3,18 | 4,16 | 4,87     | 3,66 | 5,42 | 6,49     | 6,58 | 7,60 | 8,51     | 8,21  | 9,61  | 10,72    | 10,62 | 12,13 | 13,56 |
| Heating (E)                               | kW       | 3,49 | 4,29 | 4,81     | 4,09 | 5,53 | 6,30     | 6,70 | 7,44 | 8,08     | 8,95  | 9,95  | 10,60    | 11,34 | 12,55 | 13,64 |
| Dp Cooling (E)                            | kPa      | 4,9  | 7,3  | 9,2      | 6,9  | 12,5 | 16,3     | 15,7 | 19,4 | 22,9     | 13,8  | 17,4  | 20,5     | 12,0  | 14,7  | 17,4  |
| Dp Heating (E)                            | kPa      | 9,8  | 14,2 | 17,5     | 12,0 | 20,8 | 26,3     | 12,9 | 15,6 | 18,1     | 24,6  | 29,9  | 33,9     | 27,4  | 32,9  | 38,4  |
| Fan (E)                                   | W        | 115  | 155  | 185      | 170  | 230  | 285      | 350  | 420  | 470      | 390   | 490   | 570      | 500   | 617   | 760   |
| Sound power level outlet (E)              | dB(A)    | 44   | 52   | 58       | 44   | 56   | 61       | 57   | 62   | 65       | 59    | 63    | 66       | 63    | 67    | 70    |
| Sound power level inlet + radiated (E)    | dB(A)    | 47   | 55   | 60       | 47   | 59   | 64       | 60   | 64   | 67       | 61    | 65    | 68       | 65    | 69    | 72    |
| Sound pressure level outlet (*)           | dB(A)    | 35   | 43   | 49       | 35   | 47   | 52       | 48   | 53   | 56       | 50    | 54    | 57       | 54    | 58    | 61    |
| Sound pressure level inlet + radiated (*) | dB(A)    | 38   | 46   | 51       | 38   | 50   | 55       | 51   | 55   | 58       | 52    | 56    | 59       | 56    | 60    | 63    |

(\*\*)

(E) = Eurovent certified performance.

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

(\*\*) = Models not covered by EUROVENT certification program.

## 2 pipe units.

The following standard rating conditions are used:

### COOLING (summer mode)

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

### HEATING (winter mode)

Entering air temperature + 20°C  
Water temperature + 60°C E.W.T. + 50°C L.W.T.

**AVAILABLE PRESSURE: 0 Pa**

## MTL UNITS WITH 3 ROW COIL

| MODEL                     | MTL 13 |      |      |      |       | MTL 23 |      |      |       |       | MTL 33 |       |       |       |       |       |
|---------------------------|--------|------|------|------|-------|--------|------|------|-------|-------|--------|-------|-------|-------|-------|-------|
|                           | 1      | 2    | 3    | 4    | 5     | 1      | 2    | 3    | 4     | 5     | 1      | 2     | 3     | 4     | 5     |       |
| Speed                     |        |      |      |      |       |        |      |      |       |       |        |       |       |       |       |       |
| Air flow                  | m³/h   | 995  | 1140 | 1340 | 1640  | 1925   | 855  | 1165 | 1550  | 2060  | 2510   | 1815  | 2080  | 2300  | 2590  | 2790  |
| Cooling total emission    | kW     | 4,05 | 4,37 | 4,78 | 5,32  | 5,78   | 4,32 | 5,21 | 6,14  | 7,17  | 7,90   | 7,43  | 8,00  | 8,44  | 9,00  | 9,36  |
| Cooling sensible emission | kW     | 3,42 | 3,77 | 4,24 | 4,90  | 5,49   | 3,29 | 4,13 | 5,08  | 6,23  | 7,12   | 6,02  | 6,62  | 7,10  | 7,73  | 8,16  |
| Heating                   | kW     | 7,91 | 8,71 | 9,73 | 11,13 | 12,33  | 7,75 | 9,74 | 11,92 | 14,45 | 16,44  | 14,27 | 15,69 | 16,80 | 18,19 | 19,10 |
| Dp Cooling                | kPa    | 7,0  | 8,1  | 9,6  | 11,6  | 13,7   | 8,7  | 12,4 | 16,9  | 22,5  | 27,4   | 18,7  | 21,5  | 23,8  | 26,8  | 28,8  |
| Dp Heating                | kPa    | 4,8  | 5,8  | 7,1  | 9,1   | 11,0   | 5,1  | 7,8  | 11,4  | 16,4  | 20,9   | 12,3  | 14,6  | 16,6  | 19,3  | 21,1  |
| Fan                       | W      | 136  | 154  | 175  | 210   | 240    | 180  | 225  | 273   | 320   | 340    | 390   | 430   | 470   | 509   | 523   |
| Sound power Lw            | dB(A)  | 46   | 49   | 52   | 55    | 59     | 47   | 53   | 57    | 60    | 64     | 58    | 60    | 62    | 64    | 66    |
| Sound pressure (*)        | dB(A)  | 37   | 40   | 43   | 46    | 50     | 38   | 44   | 48    | 51    | 55     | 49    | 51    | 53    | 55    | 57    |

| MODEL                     | MTL 43 |       |       |       |       | MTL 53 |       |       |       |       |       |
|---------------------------|--------|-------|-------|-------|-------|--------|-------|-------|-------|-------|-------|
|                           | 1      | 2     | 3     | 4     | 5     | 1      | 2     | 3     | 4     | 5     |       |
| Speed                     |        |       |       |       |       |        |       |       |       |       |       |
| Air flow                  | m³/h   | 2265  | 2585  | 2855  | 3130  | 3400   | 2905  | 3275  | 3540  | 3975  | 4400  |
| Cooling total emission    | kW     | 9,63  | 10,34 | 10,91 | 11,46 | 11,91  | 12,67 | 13,51 | 14,07 | 14,99 | 15,79 |
| Cooling sensible emission | kW     | 7,70  | 8,44  | 9,05  | 9,64  | 10,16  | 10,31 | 11,22 | 11,82 | 12,85 | 13,78 |
| Heating                   | kW     | 18,06 | 19,82 | 21,21 | 22,56 | 23,85  | 23,64 | 25,71 | 27,14 | 29,35 | 31,42 |
| Dp Cooling                | kPa    | 18,4  | 21,2  | 23,5  | 25,7  | 28,0   | 17,2  | 19,6  | 21,2  | 23,9  | 26,5  |
| Dp Heating                | kPa    | 9,2   | 11,0  | 12,5  | 14,0  | 15,5   | 10,9  | 12,7  | 14,1  | 16,3  | 18,4  |
| Fan                       | W      | 445   | 505   | 550   | 600   | 680    | 541   | 622   | 703   | 782   | 885   |
| Sound power Lw            | dB(A)  | 60    | 62    | 65    | 67    | 69     | 64    | 67    | 69    | 71    | 75    |
| Sound pressure (*)        | dB(A)  | 51    | 53    | 56    | 58    | 60     | 55    | 58    | 60    | 62    | 66    |

## MTL UNITS WITH 4 ROW COIL

| MODEL                     | MTL 14 |      |      |       |       | MTL 24 |      |       |       |       | MTL 34 |       |       |       |       |       |
|---------------------------|--------|------|------|-------|-------|--------|------|-------|-------|-------|--------|-------|-------|-------|-------|-------|
|                           | 1      | 2    | 3    | 4     | 5     | 1      | 2    | 3     | 4     | 5     | 1      | 2     | 3     | 4     | 5     |       |
| Speed                     |        |      |      |       |       |        |      |       |       |       |        |       |       |       |       |       |
| Air flow                  | m³/h   | 940  | 1115 | 1315  | 1575  | 1835   | 855  | 1160  | 1535  | 2005  | 2360   | 1795  | 2060  | 2265  | 2550  | 2745  |
| Cooling total emission    | kW     | 4,67 | 5,18 | 5,71  | 6,32  | 6,84   | 5,04 | 6,18  | 7,36  | 8,59  | 9,39   | 8,94  | 9,71  | 10,24 | 10,96 | 11,43 |
| Cooling sensible emission | kW     | 3,72 | 4,23 | 4,79  | 5,47  | 6,09   | 3,70 | 4,70  | 5,82  | 7,08  | 7,95   | 6,90  | 7,63  | 8,17  | 8,91  | 9,40  |
| Heating                   | kW     | 8,76 | 9,95 | 11,22 | 12,77 | 14,20  | 8,77 | 11,13 | 13,76 | 16,69 | 18,71  | 16,43 | 18,20 | 19,50 | 21,22 | 22,36 |
| Dp Cooling                | kPa    | 6,0  | 7,3  | 8,8   | 10,6  | 12,4   | 6,7  | 9,8   | 13,5  | 18,1  | 21,4   | 16,3  | 19,0  | 21,0  | 23,9  | 25,8  |
| Dp Heating                | kPa    | 3,9  | 4,9  | 6,1   | 7,8   | 9,5    | 3,7  | 5,8   | 8,6   | 12,3  | 15,2   | 9,9   | 12,0  | 13,7  | 16,1  | 17,7  |
| Fan                       | W      | 130  | 151  | 173   | 204   | 232    | 180  | 222   | 268   | 320   | 340    | 380   | 426   | 464   | 505   | 520   |
| Sound power Lw            | dB(A)  | 46   | 49   | 52    | 55    | 59     | 47   | 53    | 57    | 60    | 64     | 58    | 60    | 62    | 64    | 66    |
| Sound pressure (*)        | dB(A)  | 37   | 40   | 43    | 46    | 50     | 38   | 44    | 48    | 51    | 55     | 49    | 51    | 53    | 55    | 57    |

| MODEL                     | MTL 44 |       |       |       |       | MTL 54 |       |       |       |       |       |
|---------------------------|--------|-------|-------|-------|-------|--------|-------|-------|-------|-------|-------|
|                           | 1      | 2     | 3     | 4     | 5     | 1      | 2     | 3     | 4     | 5     |       |
| Speed                     |        |       |       |       |       |        |       |       |       |       |       |
| Air flow                  | m³/h   | 2245  | 2560  | 2820  | 3085  | 3340   | 2885  | 3240  | 3505  | 3920  | 4330  |
| Cooling total emission    | kW     | 11,47 | 12,40 | 13,12 | 13,81 | 14,38  | 14,99 | 16,07 | 16,80 | 17,95 | 18,93 |
| Cooling sensible emission | kW     | 8,79  | 9,67  | 10,38 | 11,07 | 11,68  | 11,63 | 12,68 | 13,41 | 14,57 | 15,63 |
| Heating                   | kW     | 20,86 | 23,02 | 24,69 | 26,36 | 27,90  | 27,08 | 29,56 | 31,31 | 33,96 | 36,49 |
| Dp Cooling                | kPa    | 14,6  | 16,9  | 18,8  | 20,8  | 22,6   | 13,5  | 15,4  | 16,8  | 19,0  | 21,2  |
| Dp Heating                | kPa    | 8,7   | 10,5  | 12,0  | 13,6  | 15,1   | 8,0   | 9,5   | 10,6  | 12,3  | 14,0  |
| Fan                       | W      | 445   | 505   | 550   | 600   | 680    | 536   | 612   | 689   | 766   | 868   |
| Sound power Lw            | dB(A)  | 60    | 62    | 65    | 67    | 69     | 64    | 67    | 69    | 71    | 75    |
| Sound pressure (*)        | dB(A)  | 51    | 53    | 56    | 58    | 60     | 55    | 58    | 60    | 62    | 66    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



## 4 pipe units.

The following standard rating conditions are used:

### COOLING (summer mode)

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

### HEATING (winter mode)

Entering air temperature + 20°C  
Water temperature + 70°C E.W.T. + 60°C L.W.T.

AVAILABLE PRESSURE: 0 Pa

## MTL UNITS WITH 3+1 ROW COIL

| MODEL                     | MTL 13+1 |      |      |      |      | MTL 23+1 |      |      |      |      | MTL 33+1 |      |      |      |      |       |
|---------------------------|----------|------|------|------|------|----------|------|------|------|------|----------|------|------|------|------|-------|
|                           | 1        | 2    | 3    | 4    | 5    | 1        | 2    | 3    | 4    | 5    | 1        | 2    | 3    | 4    | 5    |       |
| Speed                     |          |      |      |      |      |          |      |      |      |      |          |      |      |      |      |       |
| Air flow                  | m³/h     | 940  | 1115 | 1315 | 1575 | 1835     | 855  | 1160 | 1535 | 2005 | 2360     | 1795 | 2060 | 2265 | 2550 | 2745  |
| Cooling total emission    | kW       | 3,92 | 4,32 | 4,74 | 5,21 | 5,64     | 4,32 | 5,20 | 6,11 | 7,07 | 7,66     | 7,38 | 7,96 | 8,37 | 8,92 | 9,30  |
| Cooling sensible emission | kW       | 3,28 | 3,71 | 4,18 | 4,76 | 5,30     | 3,29 | 4,12 | 5,05 | 6,11 | 6,83     | 5,97 | 6,58 | 7,03 | 7,64 | 8,07  |
| Heating                   | kW       | 4,58 | 5,04 | 5,51 | 6,07 | 6,58     | 4,78 | 5,79 | 6,76 | 7,78 | 8,44     | 8,07 | 8,69 | 9,12 | 9,71 | 10,08 |
| Dp Cooling                | kPa      | 6,6  | 7,9  | 9,4  | 11,3 | 13,2     | 8,7  | 12,4 | 16,8 | 22,0 | 25,8     | 18,4 | 21,2 | 23,5 | 26,4 | 28,4  |
| Dp Heating                | kPa      | 13,7 | 16,4 | 19,2 | 23,0 | 26,5     | 15,9 | 22,4 | 29,8 | 38,6 | 44,8     | 18,4 | 21,0 | 23,0 | 25,7 | 27,5  |
| Fan                       | W        | 130  | 151  | 173  | 204  | 232      | 180  | 222  | 268  | 320  | 340      | 380  | 426  | 464  | 505  | 520   |
| Sound power Lw            | dB(A)    | 46   | 49   | 52   | 55   | 59       | 47   | 53   | 57   | 60   | 64       | 58   | 60   | 62   | 64   | 66    |
| Sound pressure (*)        | dB(A)    | 37   | 40   | 43   | 46   | 50       | 38   | 44   | 48   | 51   | 55       | 49   | 51   | 53   | 55   | 57    |

| MODEL                     | MTL 43+1 |       |       |       |       | MTL 53+1 |       |       |       |       |       |
|---------------------------|----------|-------|-------|-------|-------|----------|-------|-------|-------|-------|-------|
|                           | 1        | 2     | 3     | 4     | 5     | 1        | 2     | 3     | 4     | 5     |       |
| Speed                     |          |       |       |       |       |          |       |       |       |       |       |
| Air flow                  | m³/h     | 2245  | 2560  | 2820  | 3085  | 3340     | 2885  | 3240  | 3505  | 3920  | 4330  |
| Cooling total emission    | kW       | 9,58  | 10,29 | 10,84 | 11,36 | 11,80    | 12,61 | 13,46 | 14,01 | 14,88 | 15,63 |
| Cooling sensible emission | kW       | 7,65  | 8,39  | 8,97  | 9,54  | 10,04    | 10,26 | 11,15 | 11,76 | 12,73 | 13,62 |
| Heating                   | kW       | 10,53 | 11,32 | 11,93 | 12,50 | 13,04    | 13,42 | 14,30 | 14,92 | 15,85 | 16,73 |
| Dp Cooling                | kPa      | 18,3  | 21,0  | 23,2  | 25,4  | 27,5     | 17,1  | 19,3  | 21,0  | 23,5  | 26,1  |
| Dp Heating                | kPa      | 32,4  | 37,0  | 40,8  | 44,4  | 47,8     | 30,0  | 33,6  | 36,4  | 40,6  | 44,6  |
| Fan                       | W        | 445   | 505   | 550   | 600   | 680      | 536   | 612   | 689   | 766   | 868   |
| Sound power Lw            | dB(A)    | 60    | 62    | 65    | 67    | 69       | 64    | 67    | 69    | 71    | 75    |
| Sound pressure (*)        | dB(A)    | 51    | 53    | 56    | 58    | 60       | 55    | 58    | 60    | 62    | 66    |

## MTL UNITS WITH 4+1 ROW COIL

| MODEL                     | MTL 14+1 |      |      |      |      | MTL 24+1 |      |      |      |      | MTL 34+1 |      |      |       |       |       |
|---------------------------|----------|------|------|------|------|----------|------|------|------|------|----------|------|------|-------|-------|-------|
|                           | 1        | 2    | 3    | 4    | 5    | 1        | 2    | 3    | 4    | 5    | 1        | 2    | 3    | 4     | 5     |       |
| Speed                     |          |      |      |      |      |          |      |      |      |      |          |      |      |       |       |       |
| Air flow                  | m³/h     | 910  | 1090 | 1290 | 1530 | 1775     | 850  | 1155 | 1520 | 1965 | 2285     | 1780 | 2040 | 2235  | 2510  | 2700  |
| Cooling total emission    | kW       | 4,57 | 5,11 | 5,65 | 6,22 | 6,75     | 5,03 | 6,17 | 7,32 | 8,50 | 9,23     | 8,90 | 9,65 | 10,17 | 10,85 | 11,32 |
| Cooling sensible emission | kW       | 3,62 | 4,16 | 4,72 | 5,35 | 5,96     | 3,69 | 4,69 | 5,77 | 6,97 | 7,77     | 6,86 | 7,58 | 8,10  | 8,80  | 9,29  |
| Heating                   | kW       | 4,49 | 4,98 | 5,46 | 5,99 | 6,47     | 4,76 | 5,76 | 6,73 | 7,71 | 8,30     | 8,03 | 8,64 | 9,07  | 9,64  | 9,99  |
| Dp Cooling                | kPa      | 5,8  | 7,1  | 8,6  | 10,3 | 12,0     | 6,6  | 9,7  | 13,4 | 17,7 | 20,7     | 16,1 | 18,8 | 20,7  | 23,5  | 25,4  |
| Dp Heating                | kPa      | 15,3 | 18,4 | 21,8 | 25,7 | 29,6     | 15,7 | 22,3 | 29,6 | 37,7 | 43,5     | 18,2 | 20,8 | 22,7  | 25,3  | 27,1  |
| Fan                       | W        | 127  | 149  | 170  | 199  | 226      | 176  | 218  | 262  | 310  | 330      | 375  | 422  | 458   | 499   | 515   |
| Sound power Lw            | dB(A)    | 46   | 49   | 52   | 55   | 59       | 47   | 53   | 57   | 60   | 64       | 58   | 60   | 62    | 64    | 66    |
| Sound pressure (*)        | dB(A)    | 37   | 40   | 43   | 46   | 50       | 38   | 44   | 48   | 51   | 55       | 49   | 51   | 53    | 55    | 57    |

| MODEL                     | MTL 44+1 |       |       |       |       | MTL 54+1 |       |       |       |       |       |
|---------------------------|----------|-------|-------|-------|-------|----------|-------|-------|-------|-------|-------|
|                           | 1        | 2     | 3     | 4     | 5     | 1        | 2     | 3     | 4     | 5     |       |
| Speed                     |          |       |       |       |       |          |       |       |       |       |       |
| Air flow                  | m³/h     | 2225  | 2535  | 2790  | 3055  | 3295     | 2865  | 3210  | 3475  | 3875  | 4265  |
| Cooling total emission    | kW       | 11,42 | 12,34 | 13,04 | 13,74 | 14,29    | 14,93 | 15,98 | 16,74 | 17,83 | 18,80 |
| Cooling sensible emission | kW       | 8,74  | 9,61  | 10,30 | 11,00 | 11,58    | 11,58 | 12,59 | 13,34 | 14,45 | 15,48 |
| Heating                   | kW       | 10,50 | 11,27 | 11,86 | 12,44 | 12,95    | 13,37 | 14,25 | 14,85 | 15,77 | 16,58 |
| Dp Cooling                | kPa      | 14,5  | 16,7  | 18,6  | 20,6  | 22,3     | 13,4  | 15,2  | 16,7  | 18,8  | 20,9  |
| Dp Heating                | kPa      | 32,2  | 36,7  | 40,3  | 43,9  | 47,2     | 29,7  | 33,3  | 36,1  | 40,2  | 44,1  |
| Fan                       | W        | 440   | 500   | 542   | 599   | 670      | 530   | 604   | 678   | 754   | 851   |
| Sound power Lw            | dB(A)    | 60    | 62    | 65    | 67    | 69       | 64    | 67    | 69    | 71    | 75    |
| Sound pressure (*)        | dB(A)    | 51    | 53    | 56    | 58    | 60       | 55    | 58    | 60    | 62    | 66    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



4 pipe units.

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
Water temperature + 70°C E.W.T. + 60°C L.W.T.

**AVAILABLE PRESSURE: 0 Pa**

**MTL UNITS WITH 4+2 ROW COIL**

| MODEL                     | MTL 14+2 |      |      |       |       | MTL 24+2 |      |       |       |       | MTL 34+2 |       |       |       |       |       |
|---------------------------|----------|------|------|-------|-------|----------|------|-------|-------|-------|----------|-------|-------|-------|-------|-------|
|                           | 1        | 2    | 3    | 4     | 5     | 1        | 2    | 3     | 4     | 5     | 1        | 2     | 3     | 4     | 5     |       |
| Speed                     |          |      |      |       |       |          |      |       |       |       |          |       |       |       |       |       |
| Air flow                  | m³/h     | 875  | 1055 | 1260  | 1470  | 1695     | 845  | 1145  | 1505  | 1910  | 2190     | 1765  | 2010  | 2195  | 2455  | 2645  |
| Cooling total emission    | kW       | 4,46 | 5,00 | 5,57  | 6,08  | 6,60     | 5,01 | 6,14  | 7,28  | 8,36  | 9,02     | 8,86  | 9,57  | 10,07 | 10,73 | 11,20 |
| Cooling sensible emission | kW       | 3,51 | 4,05 | 4,63  | 5,19  | 5,78     | 3,67 | 4,67  | 5,74  | 6,83  | 7,54     | 6,82  | 7,50  | 7,99  | 8,67  | 9,16  |
| Heating                   | kW       | 8,56 | 9,72 | 10,92 | 12,06 | 13,17    | 9,14 | 11,35 | 13,67 | 15,95 | 17,37    | 16,19 | 17,63 | 18,66 | 20,02 | 20,98 |
| Dp Cooling                | kPa      | 5,5  | 6,8  | 8,3   | 9,9   | 11,4     | 6,6  | 9,6   | 13,2  | 17,2  | 19,8     | 16,0  | 18,4  | 20,3  | 22,9  | 24,8  |
| Dp Heating                | kPa      | 13,2 | 16,7 | 20,8  | 24,8  | 29,3     | 12,3 | 18,4  | 26,1  | 34,6  | 40,6     | 18,0  | 21,2  | 23,5  | 26,8  | 29,2  |
| Fan                       | W        | 124  | 145  | 168   | 193   | 218      | 173  | 212   | 257   | 310   | 330      | 369   | 414   | 449   | 489   | 507   |
| Sound power Lw            | dB(A)    | 46   | 49   | 52    | 55    | 59       | 47   | 53    | 57    | 60    | 64       | 58    | 60    | 62    | 64    | 66    |
| Sound pressure (*)        | dB(A)    | 37   | 40   | 43    | 46    | 50       | 38   | 44    | 48    | 51    | 55       | 49    | 51    | 53    | 55    | 57    |

| MODEL                     | MTL 44+2 |       |       |       |       | MTL 54+2 |       |       |       |       |       |
|---------------------------|----------|-------|-------|-------|-------|----------|-------|-------|-------|-------|-------|
|                           | 1        | 2     | 3     | 4     | 5     | 1        | 2     | 3     | 4     | 5     |       |
| Speed                     |          |       |       |       |       |          |       |       |       |       |       |
| Air flow                  | m³/h     | 2205  | 2500  | 2745  | 3005  | 3230     | 2825  | 3165  | 3430  | 3810  | 4170  |
| Cooling total emission    | kW       | 11,36 | 12,24 | 12,92 | 13,60 | 14,14    | 14,83 | 15,87 | 16,62 | 17,64 | 18,55 |
| Cooling sensible emission | kW       | 8,69  | 9,52  | 10,19 | 10,87 | 11,42    | 11,47 | 12,47 | 13,22 | 14,27 | 15,22 |
| Heating                   | kW       | 20,93 | 22,77 | 24,21 | 25,66 | 26,87    | 26,37 | 28,46 | 29,97 | 32,07 | 33,94 |
| Dp Cooling                | kPa      | 14,3  | 16,5  | 18,3  | 20,2  | 21,8     | 13,2  | 15,0  | 16,4  | 18,5  | 20,4  |
| Dp Heating                | kPa      | 27,2  | 31,8  | 35,6  | 39,6  | 43,3     | 27,4  | 31,6  | 34,8  | 39,4  | 43,7  |
| Fan                       | W        | 434   | 489   | 528   | 587   | 650      | 521   | 593   | 662   | 737   | 828   |
| Sound power Lw            | dB(A)    | 60    | 62    | 65    | 67    | 69       | 64    | 67    | 69    | 71    | 75    |
| Sound pressure (*)        | dB(A)    | 51    | 53    | 56    | 58    | 60       | 55    | 58    | 60    | 62    | 66    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



Cooling emission of 3 row coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |      |      |       |
|--------|-------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|------|------|-------|
|        |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|        |       |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| MTL 13 | 5     | MAX | 1925        | 6,52  | 5,47  | 1122 | 15,4  | 5,77        | 5,32  | 992  | 12,7  | 4,64         | 4,54  | 797  | 8,3   | 3,66         | 3,59 | 630  | 5,2   |
|        | 4     |     | 1640        | 5,90  | 4,84  | 1015 | 13,3  | 5,31        | 4,76  | 914  | 10,9  | 4,24         | 4,15  | 729  | 7,0   | 3,33         | 3,26 | 572  | 4,4   |
|        | 3     | MED | 1340        | 5,32  | 4,22  | 914  | 10,9  | 4,76        | 4,11  | 819  | 8,9   | 3,77         | 3,70  | 649  | 5,7   | 2,94         | 2,88 | 505  | 3,5   |
|        | 2     |     | 1140        | 4,87  | 3,77  | 837  | 9,3   | 4,36        | 3,66  | 749  | 7,5   | 3,44         | 3,37  | 591  | 4,8   | 2,65         | 2,60 | 457  | 2,9   |
|        | 1     | MIN | 995         | 4,51  | 3,43  | 776  | 8,1   | 4,03        | 3,32  | 694  | 6,5   | 3,16         | 3,10  | 544  | 4,1   | 2,43         | 2,38 | 418  | 2,5   |
| MTL 23 | 5     | MAX | 2510        | 8,89  | 7,13  | 1529 | 30,9  | 7,99        | 7,01  | 1374 | 25,3  | 6,42         | 6,29  | 1104 | 16,6  | 5,07         | 4,96 | 871  | 10,5  |
|        | 4     |     | 2060        | 8,02  | 6,23  | 1379 | 25,6  | 7,22        | 6,11  | 1241 | 20,9  | 5,75         | 5,64  | 990  | 13,5  | 4,51         | 4,42 | 775  | 8,4   |
|        | 3     | MED | 1550        | 6,90  | 5,15  | 1187 | 19,3  | 6,19        | 5,00  | 1064 | 15,7  | 4,88         | 4,74  | 840  | 10,0  | 3,78         | 3,70 | 650  | 6,1   |
|        | 2     |     | 1165        | 5,88  | 4,23  | 1011 | 14,3  | 5,25        | 4,07  | 902  | 11,6  | 4,11         | 3,80  | 707  | 7,2   | 3,14         | 3,08 | 541  | 4,3   |
|        | 1     | MIN | 855         | 4,87  | 3,40  | 837  | 10,1  | 4,35        | 3,25  | 748  | 8,1   | 3,37         | 2,97  | 580  | 5,0   | 2,56         | 2,50 | 440  | 2,9   |
| MTL 33 | 5     | MAX | 2790        | 10,56 | 8,23  | 1816 | 32,6  | 9,51        | 8,09  | 1636 | 26,7  | 7,61         | 7,46  | 1309 | 17,4  | 5,98         | 5,86 | 1029 | 10,9  |
|        | 4     |     | 2590        | 10,16 | 7,83  | 1748 | 30,5  | 9,15        | 7,68  | 1573 | 24,9  | 7,29         | 7,15  | 1254 | 16,1  | 5,72         | 5,60 | 983  | 10,0  |
|        | 3     | MED | 2300        | 9,56  | 7,24  | 1644 | 27,1  | 8,59        | 7,07  | 1477 | 22,1  | 6,82         | 6,68  | 1172 | 14,2  | 5,32         | 5,21 | 915  | 8,7   |
|        | 2     |     | 2080        | 9,06  | 6,76  | 1558 | 24,6  | 8,14        | 6,59  | 1400 | 19,9  | 6,43         | 6,26  | 1107 | 12,7  | 5,00         | 4,90 | 859  | 7,8   |
|        | 1     | MIN | 1815        | 8,41  | 6,18  | 1447 | 21,3  | 7,53        | 5,98  | 1295 | 17,3  | 5,94         | 5,64  | 1021 | 11,0  | 4,59         | 4,50 | 789  | 6,6   |
| MTL 43 | 5     | MAX | 3400        | 13,60 | 10,43 | 2340 | 32,2  | 12,24       | 10,23 | 2105 | 26,3  | 9,76         | 9,57  | 1679 | 17,1  | 7,65         | 7,50 | 1316 | 10,6  |
|        | 4     |     | 3130        | 13,03 | 9,87  | 2240 | 29,7  | 11,71       | 9,65  | 2014 | 24,3  | 9,31         | 9,12  | 1601 | 15,6  | 7,27         | 7,13 | 1251 | 9,6   |
|        | 3     | MED | 2855        | 12,21 | 9,10  | 2100 | 26,4  | 10,97       | 8,87  | 1887 | 21,5  | 8,68         | 8,43  | 1493 | 13,7  | 6,75         | 6,61 | 1161 | 8,4   |
|        | 2     |     | 2585        | 11,58 | 8,53  | 1991 | 23,9  | 10,38       | 8,28  | 1786 | 19,4  | 8,20         | 7,83  | 1410 | 12,3  | 6,35         | 6,22 | 1092 | 7,5   |
|        | 1     | MIN | 2265        | 10,68 | 7,74  | 1837 | 20,5  | 9,56        | 7,46  | 1645 | 16,6  | 7,52         | 7,00  | 1293 | 10,5  | 5,79         | 5,67 | 995  | 6,3   |
| MTL 53 | 5     | MAX | 4400        | 17,85 | 14,02 | 3070 | 30,0  | 16,02       | 13,66 | 2755 | 24,6  | 12,75        | 12,50 | 2193 | 15,8  | 9,97         | 9,77 | 1715 | 9,8   |
|        | 4     |     | 3975        | 16,90 | 13,07 | 2907 | 27,2  | 15,17       | 12,71 | 2609 | 22,2  | 12,04        | 11,80 | 2071 | 14,2  | 9,37         | 9,19 | 1612 | 8,7   |
|        | 3     | MED | 3540        | 15,88 | 12,06 | 2731 | 24,2  | 14,24       | 11,70 | 2449 | 19,7  | 11,25        | 11,02 | 1934 | 12,6  | 8,71         | 8,53 | 1498 | 7,6   |
|        | 2     |     | 3275        | 15,22 | 11,43 | 2617 | 22,4  | 13,64       | 11,06 | 2345 | 18,2  | 10,75        | 10,38 | 1849 | 11,5  | 8,29         | 8,13 | 1427 | 6,9   |
|        | 1     | MIN | 2905        | 14,23 | 10,51 | 2447 | 19,7  | 12,73       | 10,14 | 2189 | 16,0  | 10,01        | 9,46  | 1721 | 10,1  | 7,68         | 7,53 | 1321 | 6,0   |

Cooling emission of 3 row coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |      |      |       |
|--------|-------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|------|------|-------|
|        |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|        |       |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| MTL 13 | 5     | MAX | 1925        | 5,74  | 5,30  | 988  | 12,6  | 5,17        | 5,07  | 889  | 10,3  | 4,13         | 4,04  | 710  | 6,7   | 3,59         | 3,52 | 617  | 5,0   |
|        | 4     |     | 1640        | 5,29  | 4,73  | 909  | 10,8  | 4,74        | 4,64  | 815  | 8,8   | 3,76         | 3,69  | 647  | 5,6   | 3,25         | 3,19 | 559  | 4,2   |
|        | 3     | MED | 1340        | 4,74  | 4,10  | 816  | 8,9   | 4,23        | 4,00  | 728  | 7,1   | 3,34         | 3,27  | 574  | 4,5   | 2,80         | 2,74 | 481  | 3,2   |
|        | 2     |     | 1140        | 4,33  | 3,65  | 744  | 7,5   | 3,86        | 3,55  | 665  | 6,0   | 3,02         | 2,96  | 520  | 3,8   | 2,41         | 2,37 | 415  | 2,5   |
|        | 1     | MIN | 995         | 4,01  | 3,31  | 691  | 6,5   | 3,56        | 3,20  | 613  | 5,2   | 2,78         | 2,73  | 479  | 3,2   | 2,13         | 2,09 | 367  | 2,0   |
| MTL 23 | 5     | MAX | 2510        | 7,97  | 6,99  | 1370 | 25,3  | 7,16        | 6,88  | 1232 | 20,6  | 5,72         | 5,60  | 984  | 13,3  | 4,66         | 4,56 | 801  | 9,1   |
|        | 4     |     | 2060        | 7,18  | 6,09  | 1234 | 20,8  | 6,43        | 5,96  | 1106 | 16,9  | 5,10         | 5,00  | 877  | 10,8  | 3,98         | 3,90 | 684  | 6,6   |
|        | 3     | MED | 1550        | 6,15  | 4,99  | 1057 | 15,6  | 5,48        | 4,85  | 943  | 12,6  | 4,30         | 4,22  | 740  | 7,9   | 3,32         | 3,25 | 570  | 4,7   |
|        | 2     |     | 1165        | 5,22  | 4,07  | 898  | 11,5  | 4,65        | 3,92  | 799  | 9,2   | 3,60         | 3,53  | 620  | 5,7   | 2,74         | 2,69 | 472  | 3,3   |
|        | 1     | MIN | 855         | 4,32  | 3,24  | 743  | 8,1   | 3,83        | 3,10  | 659  | 6,4   | 2,95         | 2,84  | 507  | 3,9   | 2,21         | 2,17 | 381  | 2,2   |
| MTL 33 | 5     | MAX | 2790        | 9,47  | 8,06  | 1629 | 26,7  | 8,49        | 7,91  | 1461 | 21,7  | 6,76         | 6,63  | 1163 | 13,9  | 5,28         | 5,18 | 909  | 8,5   |
|        | 4     |     | 2590        | 9,11  | 7,66  | 1566 | 24,8  | 8,16        | 7,49  | 1403 | 20,1  | 6,47         | 6,34  | 1113 | 12,8  | 5,05         | 4,94 | 868  | 7,8   |
|        | 3     | MED | 2300        | 8,55  | 7,05  | 1470 | 22,1  | 7,65        | 6,88  | 1316 | 17,8  | 6,03         | 5,91  | 1038 | 11,3  | 4,68         | 4,59 | 805  | 6,8   |
|        | 2     |     | 2080        | 8,09  | 6,57  | 1391 | 19,9  | 7,23        | 6,40  | 1244 | 16,0  | 5,68         | 5,56  | 977  | 10,1  | 4,39         | 4,30 | 755  | 6,0   |
|        | 1     | MIN | 1815        | 7,50  | 5,97  | 1290 | 17,3  | 6,69        | 5,79  | 1151 | 13,9  | 5,23         | 5,12  | 899  | 8,6   | 4,02         | 3,94 | 691  | 5,1   |
| MTL 43 | 5     | MAX | 3400        | 12,18 | 10,20 | 2094 | 26,3  | 10,91       | 9,98  | 1877 | 21,3  | 8,67         | 8,49  | 1491 | 13,6  | 6,75         | 6,62 | 1161 | 8,3   |
|        | 4     |     | 3130        | 11,66 | 9,63  | 2005 | 24,2  | 10,44       | 9,41  | 1796 | 19,6  | 8,25         | 8,08  | 1419 | 12,4  | 6,41         | 6,28 | 1102 | 7,5   |
|        | 3     | MED | 2855        | 10,91 | 8,85  | 1877 | 21,4  | 9,76        | 8,62  | 1678 | 17,2  | 7,67         | 7,52  | 1319 | 10,9  | 5,93         | 5,81 | 1020 | 6,5   |
|        | 2     |     | 2585        | 10,34 | 8,27  | 1779 | 19,3  | 9,23        | 8,03  | 1588 | 15,6  | 7,23         | 7,09  | 1244 | 9,7   | 5,57         | 5,46 | 958  | 5,8   |
|        | 1     | MIN | 2265        | 9,51  | 7,45  | 1636 | 16,6  | 8,48        | 7,20  | 1458 | 13,3  | 6,61         | 6,48  | 1137 | 8,2   | 5,06         | 4,95 | 869  | 4,8   |
| MTL 53 | 5     | MAX | 4400        | 15,96 | 13,63 | 2744 | 24,5  | 14,29       | 13,29 | 2458 | 19,8  | 11,30        | 11,08 | 1944 | 12,6  | 8,79         | 8,62 | 1512 | 8,0   |
|        | 4     |     | 3975        | 15,12 | 12,69 | 2601 | 22,2  | 13,52       | 12,34 | 2326 | 17,9  | 10,64        | 10,43 | 1831 | 11,3  | 8,23         | 8,07 | 1416 | 6,8   |
|        | 3     | MED | 3540        | 14,18 | 11,68 | 2439 | 19,7  | 12,64       | 11,31 | 2175 | 15,8  | 9,92         | 9,72  | 1706 | 9,9   | 7,64         | 7,49 | 1315 | 5,9   |
|        | 2     |     | 3275        | 13,58 | 11,05 | 2336 | 18,1  | 12,09       | 10,67 | 2080 | 14,6  | 9,47         | 9,28  | 1628 | 9,1   | 7,27         | 7,12 | 1250 | 5,4   |
|        | 1     | MIN | 2905        | 12,68 | 10,13 | 2181 | 15,9  | 11,30       | 9,77  | 1944 | 12,8  | 8,79         | 8,61  | 1512 | 7,9   | 6,71         | 6,58 | 1155 | 4,6   |

Note: the power absorption (Watt) at page 16 must be subtracted from the total and sensible cooling emission.

## Cooling emission of 3 row coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed | WT: 7/12 °C |          |          |           | WT: 8/13 °C  |          |          |           | WT: 10/15 °C |          |          |           | WT: 12/17 °C |          |          |           |              |
|---------------|-------|-------------|----------|----------|-----------|--------------|----------|----------|-----------|--------------|----------|----------|-----------|--------------|----------|----------|-----------|--------------|
|               |       | Qv<br>m³/h  | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa |
| <b>MTL 13</b> | 5 MAX | 1925        | 5,15     | 5,05     | 886       | 10,3         | 4,62     | 4,53     | 795       | 8,3          | 3,67     | 3,60     | 632       | 5,3          | 3,22     | 3,16     | 554       | 4,1          |
|               | 4     | 1640        | 4,72     | 4,62     | 813       | 8,8          | 4,22     | 4,14     | 726       | 7,1          | 3,34     | 3,27     | 574       | 4,5          | 2,92     | 2,86     | 502       | 3,4          |
|               | 3 MED | 1340        | 4,23     | 3,98     | 727       | 7,1          | 3,76     | 3,69     | 647       | 5,7          | 2,95     | 2,89     | 507       | 3,5          | 2,57     | 2,52     | 442       | 2,7          |
|               | 2     | 1140        | 3,85     | 3,54     | 663       | 6,0          | 3,42     | 3,35     | 588       | 4,8          | 2,66     | 2,61     | 458       | 2,9          | 2,31     | 2,27     | 398       | 2,2          |
|               | 1 MIN | 995         | 3,56     | 3,19     | 612       | 5,2          | 3,15     | 3,09     | 542       | 4,1          | 2,44     | 2,39     | 420       | 2,5          | 2,12     | 2,07     | 364       | 1,9          |
| <b>MTL 23</b> | 5 MAX | 2510        | 7,14     | 6,84     | 1228      | 20,6         | 6,40     | 6,27     | 1101      | 16,7         | 5,08     | 4,98     | 874       | 10,7         | 4,43     | 4,34     | 761       | 8,2          |
|               | 4     | 2060        | 6,42     | 5,94     | 1104      | 16,9         | 5,73     | 5,62     | 986       | 13,6         | 4,51     | 4,42     | 776       | 8,6          | 3,92     | 3,84     | 674       | 6,5          |
|               | 3 MED | 1550        | 5,47     | 4,83     | 941       | 12,6         | 4,86     | 4,69     | 836       | 10,0         | 3,79     | 3,71     | 652       | 6,2          | 3,26     | 3,19     | 560       | 4,6          |
|               | 2     | 1165        | 4,62     | 3,91     | 795       | 9,2          | 4,09     | 3,77     | 704       | 7,3          | 3,15     | 3,09     | 543       | 4,4          | 2,68     | 2,63     | 462       | 3,2          |
|               | 1 MIN | 855         | 3,82     | 3,10     | 656       | 6,4          | 3,36     | 2,96     | 579       | 5,1          | 2,56     | 2,51     | 441       | 3,0          | 2,09     | 2,04     | 359       | 2,0          |
| <b>MTL 33</b> | 5 MAX | 2790        | 8,48     | 7,88     | 1458      | 21,7         | 7,58     | 7,42     | 1303      | 17,5         | 5,99     | 5,87     | 1030      | 11,1         | 5,20     | 5,09     | 894       | 8,4          |
|               | 4     | 2590        | 8,14     | 7,47     | 1399      | 20,1         | 7,27     | 7,12     | 1250      | 16,2         | 5,73     | 5,62     | 986       | 10,2         | 4,96     | 4,86     | 853       | 7,7          |
|               | 3 MED | 2300        | 7,61     | 6,85     | 1310      | 17,8         | 6,79     | 6,66     | 1168      | 14,3         | 5,33     | 5,22     | 917       | 8,9          | 4,60     | 4,50     | 790       | 6,6          |
|               | 2     | 2080        | 7,20     | 6,38     | 1239      | 16,0         | 6,41     | 6,20     | 1103      | 12,8         | 5,01     | 4,91     | 862       | 7,9          | 4,31     | 4,22     | 741       | 5,9          |
|               | 1 MIN | 1815        | 6,66     | 5,77     | 1146      | 13,9         | 5,92     | 5,60     | 1018      | 11,1         | 4,60     | 4,51     | 791       | 6,8          | 3,93     | 3,85     | 677       | 4,9          |
| <b>MTL 43</b> | 5 MAX | 3400        | 10,89    | 9,95     | 1872      | 21,3         | 9,73     | 9,54     | 1674      | 17,2         | 7,68     | 7,52     | 1320      | 10,8         | 6,63     | 6,50     | 1141      | 8,1          |
|               | 4     | 3130        | 10,39    | 9,37     | 1788      | 19,5         | 9,28     | 9,09     | 1596      | 15,7         | 7,30     | 7,15     | 1255      | 9,8          | 6,28     | 6,16     | 1081      | 7,4          |
|               | 3 MED | 2855        | 9,70     | 8,58     | 1669      | 17,2         | 8,64     | 8,35     | 1486      | 13,8         | 6,77     | 6,63     | 1164      | 8,5          | 5,81     | 5,69     | 999       | 6,3          |
|               | 2     | 2585        | 9,19     | 8,00     | 1581      | 15,6         | 8,17     | 7,76     | 1405      | 12,4         | 6,37     | 6,24     | 1096      | 7,6          | 5,45     | 5,34     | 937       | 5,6          |
|               | 1 MIN | 2265        | 8,44     | 7,18     | 1451      | 13,3         | 7,49     | 6,94     | 1288      | 10,5         | 5,80     | 5,68     | 997       | 6,4          | 4,93     | 4,83     | 848       | 4,6          |
| <b>MTL 53</b> | 5 MAX | 4400        | 14,26    | 13,24    | 2453      | 19,8         | 12,73    | 12,47    | 2189      | 15,9         | 10,00    | 9,80     | 1721      | 10,0         | 8,77     | 8,60     | 1509      | 7,7          |
|               | 4     | 3975        | 13,46    | 12,28    | 2316      | 17,8         | 12,00    | 11,76    | 2064      | 14,3         | 9,40     | 9,21     | 1616      | 8,9          | 8,22     | 8,06     | 1414      | 6,8          |
|               | 3 MED | 3540        | 12,64    | 11,29    | 2174      | 15,8         | 11,21    | 10,93    | 1929      | 12,6         | 8,74     | 8,57     | 1503      | 7,8          | 7,63     | 7,47     | 1312      | 5,9          |
|               | 2     | 3275        | 12,06    | 10,65    | 2074      | 14,6         | 10,70    | 10,29    | 1841      | 11,6         | 8,33     | 8,16     | 1432      | 7,1          | 7,24     | 7,10     | 1246      | 5,3          |
|               | 1 MIN | 2905        | 11,25    | 9,74     | 1935      | 12,8         | 9,96     | 9,38     | 1713      | 10,1         | 7,71     | 7,56     | 1326      | 6,1          | 6,68     | 6,55     | 1149      | 4,6          |

Note: the power absorption (Watt) at page 16 must be subtracted from the total and sensible cooling emission.

### LEGENDA

|                                       |                           |
|---------------------------------------|---------------------------|
| <b>WT</b> = Water temperature         | <b>Speed</b> = Fan speed  |
| <b>Pc</b> = Cooling total emission    | <b>MAX</b> = High speed   |
| <b>Ps</b> = Cooling sensible emission | <b>MED</b> = Medium speed |
| <b>Qw</b> = Water flow                | <b>MIN</b> = Low speed    |
| <b>Dp(c)</b> = Water pressure drop    | <b>Qv</b> = Air flow      |



Cooling emission of 4 row coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |       |      |       |
|--------|-------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|-------|------|-------|
|        |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) |
|        |       |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   |
| MTL 14 | 5     | MAX | 1835        | 7,64  | 6,10  | 1313 | 14,1  | 6,84        | 5,92  | 1177 | 11,4  | 5,40         | 5,29  | 928  | 7,3   | 4,18         | 4,10  | 720  | 4,5   |
|        | 4     |     | 1575        | 7,03  | 5,48  | 1209 | 12,1  | 6,28        | 5,29  | 1080 | 9,8   | 4,94         | 4,84  | 849  | 6,2   | 3,81         | 3,73  | 655  | 3,7   |
|        | 3     | MED | 1315        | 6,35  | 4,82  | 1092 | 10,1  | 5,66        | 4,63  | 974  | 8,1   | 4,43         | 4,31  | 762  | 5,1   | 3,39         | 3,32  | 583  | 3,0   |
|        | 2     |     | 1115        | 5,78  | 4,28  | 994  | 8,4   | 5,15        | 4,10  | 885  | 6,8   | 4,00         | 3,77  | 687  | 4,2   | 3,04         | 2,98  | 523  | 2,5   |
|        | 1     | MIN | 940         | 5,20  | 3,78  | 895  | 7,0   | 4,64        | 3,60  | 798  | 5,6   | 3,59         | 3,29  | 617  | 3,4   | 2,71         | 2,65  | 466  | 2,0   |
| MTL 24 | 5     | MAX | 2360        | 10,49 | 8,01  | 1804 | 24,5  | 9,41        | 7,77  | 1619 | 19,9  | 7,44         | 7,29  | 1279 | 12,7  | 5,76         | 5,64  | 991  | 7,7   |
|        | 4     |     | 2005        | 9,61  | 7,16  | 1652 | 20,8  | 8,60        | 6,91  | 1479 | 16,8  | 6,76         | 6,46  | 1163 | 10,6  | 5,20         | 5,10  | 895  | 6,4   |
|        | 3     | MED | 1535        | 8,25  | 5,94  | 1419 | 15,6  | 7,37        | 5,69  | 1267 | 12,6  | 5,75         | 5,24  | 989  | 7,8   | 4,38         | 4,29  | 753  | 4,6   |
|        | 2     |     | 1160        | 6,95  | 4,85  | 1195 | 11,4  | 6,20        | 4,61  | 1067 | 9,1   | 4,81         | 4,19  | 827  | 5,6   | 3,62         | 3,55  | 622  | 3,2   |
|        | 1     | MIN | 855         | 5,68  | 3,85  | 977  | 7,8   | 5,06        | 3,64  | 871  | 6,3   | 3,90         | 3,26  | 672  | 3,8   | 2,92         | 2,86  | 502  | 2,2   |
| MTL 34 | 5     | MAX | 2745        | 12,86 | 9,58  | 2213 | 29,5  | 11,53       | 9,27  | 1982 | 24,0  | 9,09         | 8,70  | 1564 | 15,2  | 7,02         | 6,88  | 1207 | 9,2   |
|        | 4     |     | 2550        | 12,35 | 9,11  | 2124 | 27,4  | 11,06       | 8,79  | 1902 | 22,3  | 8,71         | 8,22  | 1497 | 14,0  | 6,71         | 6,57  | 1153 | 8,4   |
|        | 3     | MED | 2265        | 11,57 | 8,39  | 1990 | 24,2  | 10,34       | 8,07  | 1778 | 19,6  | 8,11         | 7,50  | 1396 | 12,3  | 6,22         | 6,10  | 1070 | 7,3   |
|        | 2     |     | 2060        | 10,95 | 7,85  | 1883 | 21,9  | 9,79        | 7,54  | 1685 | 17,7  | 7,65         | 6,96  | 1316 | 11,1  | 5,85         | 5,73  | 1006 | 6,5   |
|        | 1     | MIN | 1795        | 10,10 | 7,13  | 1737 | 18,8  | 9,03        | 6,82  | 1553 | 15,2  | 7,03         | 6,25  | 1210 | 9,4   | 5,34         | 5,23  | 918  | 5,5   |
| MTL 44 | 5     | MAX | 3340        | 16,41 | 12,11 | 2823 | 36,5  | 14,70       | 11,70 | 2529 | 31,4  | 11,57        | 10,94 | 1990 | 13,6  | 8,91         | 8,73  | 1533 | 8,1   |
|        | 4     |     | 3085        | 15,69 | 11,46 | 2699 | 34,3  | 14,05       | 11,04 | 2416 | 29,7  | 11,03        | 10,29 | 1898 | 12,4  | 8,47         | 8,30  | 1457 | 7,4   |
|        | 3     | MED | 2820        | 14,67 | 10,55 | 2523 | 31,5  | 13,13       | 10,14 | 2258 | 27,3  | 10,27        | 9,38  | 1766 | 10,8  | 7,85         | 7,69  | 1350 | 6,4   |
|        | 2     |     | 2560        | 13,86 | 9,85  | 2383 | 29,3  | 12,39       | 9,44  | 2132 | 25,6  | 9,67         | 8,69  | 1664 | 9,7   | 7,36         | 7,22  | 1266 | 5,7   |
|        | 1     | MIN | 2245        | 12,72 | 8,89  | 2187 | 26,4  | 11,35       | 8,48  | 1952 | 23,2  | 8,82         | 7,74  | 1518 | 8,2   | 6,69         | 6,56  | 1151 | 4,8   |
| MTL 54 | 5     | MAX | 4330        | 21,34 | 16,03 | 3671 | 47,4  | 19,12       | 15,43 | 3288 | 41,7  | 15,01        | 14,33 | 2581 | 17,4  | 11,53        | 11,30 | 1984 | 11,4  |
|        | 4     |     | 3920        | 20,19 | 14,95 | 3473 | 43,0  | 18,06       | 14,34 | 3106 | 39,0  | 14,14        | 13,26 | 2433 | 16,1  | 10,82        | 10,61 | 1861 | 10,6  |
|        | 3     | MED | 3505        | 18,94 | 13,80 | 3258 | 42,5  | 16,92       | 13,20 | 2911 | 37,7  | 13,20        | 12,12 | 2270 | 15,1  | 10,06        | 9,86  | 1730 | 9,8   |
|        | 2     |     | 3240        | 18,06 | 13,03 | 3106 | 40,0  | 16,13       | 12,44 | 2775 | 35,0  | 12,58        | 11,39 | 2164 | 14,0  | 9,54         | 9,35  | 1641 | 9,0   |
|        | 1     | MIN | 2885        | 16,85 | 11,99 | 2899 | 36,0  | 15,03       | 11,40 | 2585 | 32,0  | 11,71        | 10,39 | 2014 | 13,0  | 8,83         | 8,66  | 1519 | 8,0   |

Cooling emission of 4 row coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |      |      |       |
|--------|-------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|------|------|-------|
|        |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|        |       |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| MTL 14 | 5     | MAX | 1835        | 6,80  | 5,90  | 1170 | 11,4  | 6,07        | 5,73  | 1044 | 9,2   | 4,76         | 4,67  | 819  | 5,8   | 4,06         | 3,98 | 699  | 4,3   |
|        | 4     |     | 1575        | 6,27  | 5,29  | 1078 | 9,8   | 5,56        | 5,10  | 957  | 7,8   | 4,34         | 4,25  | 747  | 4,9   | 3,53         | 3,46 | 608  | 3,3   |
|        | 3     | MED | 1315        | 5,64  | 4,63  | 970  | 8,1   | 5,01        | 4,45  | 861  | 6,5   | 3,88         | 3,81  | 668  | 4,0   | 3,00         | 2,94 | 516  | 2,5   |
|        | 2     |     | 1115        | 5,12  | 4,10  | 881  | 6,7   | 4,54        | 3,92  | 781  | 5,4   | 3,50         | 3,43  | 601  | 3,3   | 2,64         | 2,59 | 455  | 1,9   |
|        | 1     | MIN | 940         | 4,61  | 3,60  | 793  | 5,6   | 4,08        | 3,43  | 701  | 4,4   | 3,13         | 3,06  | 538  | 2,6   | 2,35         | 2,30 | 404  | 1,5   |
| MTL 24 | 5     | MAX | 2360        | 9,38  | 7,76  | 1613 | 19,9  | 8,36        | 7,52  | 1438 | 16,0  | 6,57         | 6,43  | 1129 | 10,0  | 5,06         | 4,96 | 870  | 6,0   |
|        | 4     |     | 2005        | 8,55  | 6,90  | 1471 | 16,8  | 7,62        | 6,66  | 1311 | 13,4  | 5,94         | 5,82  | 1022 | 8,3   | 4,55         | 4,46 | 782  | 4,9   |
|        | 3     | MED | 1535        | 7,33  | 5,69  | 1261 | 12,5  | 6,51        | 5,45  | 1120 | 10,0  | 5,03         | 4,93  | 865  | 6,1   | 3,81         | 3,73 | 655  | 3,5   |
|        | 2     |     | 1160        | 6,17  | 4,62  | 1061 | 9,1   | 5,46        | 4,39  | 939  | 7,2   | 4,18         | 3,99  | 720  | 4,3   | 3,13         | 3,07 | 539  | 2,4   |
|        | 1     | MIN | 855         | 5,03  | 3,65  | 866  | 6,2   | 4,45        | 3,45  | 766  | 4,9   | 3,39         | 3,09  | 583  | 2,9   | 2,51         | 2,46 | 431  | 1,6   |
| MTL 34 | 5     | MAX | 2745        | 11,47 | 9,26  | 1973 | 24,0  | 10,22       | 8,95  | 1759 | 19,3  | 8,01         | 7,85  | 1377 | 12,0  | 6,15         | 6,03 | 1058 | 7,1   |
|        | 4     |     | 2550        | 11,01 | 8,79  | 1895 | 22,2  | 9,82        | 8,48  | 1688 | 17,8  | 7,66         | 7,51  | 1318 | 11,0  | 5,87         | 5,75 | 1009 | 6,5   |
|        | 3     | MED | 2265        | 10,29 | 8,07  | 1770 | 19,5  | 9,16        | 7,76  | 1576 | 15,7  | 7,12         | 6,98  | 1224 | 9,6   | 5,42         | 5,31 | 932  | 5,6   |
|        | 2     |     | 2060        | 9,74  | 7,54  | 1676 | 17,6  | 8,66        | 7,23  | 1490 | 14,1  | 6,70         | 6,57  | 1153 | 8,6   | 5,09         | 4,99 | 875  | 5,0   |
|        | 1     | MIN | 1795        | 8,97  | 6,82  | 1543 | 15,1  | 7,97        | 6,52  | 1371 | 12,1  | 6,14         | 5,98  | 1057 | 7,3   | 4,64         | 4,55 | 798  | 4,2   |
| MTL 44 | 5     | MAX | 3340        | 14,62 | 11,68 | 2514 | 31,3  | 13,04       | 11,28 | 2243 | 24,0  | 10,17        | 9,96  | 1749 | 12,0  | 7,79         | 7,63 | 1339 | 8,1   |
|        | 4     |     | 3085        | 13,97 | 11,03 | 2403 | 28,0  | 12,43       | 10,62 | 2138 | 22,0  | 9,68         | 9,49  | 1665 | 11,0  | 7,39         | 7,24 | 1271 | 7,4   |
|        | 3     | MED | 2820        | 13,06 | 10,13 | 2246 | 25,0  | 11,61       | 9,73  | 1996 | 21,0  | 9,00         | 8,82  | 1548 | 10,0  | 6,84         | 6,70 | 1176 | 6,4   |
|        | 2     |     | 2560        | 12,31 | 9,43  | 2118 | 22,0  | 10,94       | 9,03  | 1881 | 19,0  | 8,45         | 8,28  | 1454 | 9,0   | 6,40         | 6,27 | 1100 | 5,7   |
|        | 1     | MIN | 2245        | 11,29 | 8,49  | 1942 | 19,0  | 10,01       | 8,09  | 1722 | 17,0  | 7,70         | 7,40  | 1325 | 8,0   | 5,79         | 5,68 | 997  | 5,0   |
| MTL 54 | 5     | MAX | 4330        | 19,04 | 15,42 | 3275 | 41,0  | 16,94       | 14,83 | 2913 | 32,0  | 13,19        | 12,93 | 2269 | 15,0  | 10,08        | 9,88 | 1733 | 11,4  |
|        | 4     |     | 3920        | 17,97 | 14,33 | 3090 | 38,0  | 15,99       | 13,75 | 2750 | 29,0  | 12,41        | 12,16 | 2135 | 14,0  | 9,43         | 9,25 | 1623 | 10,0  |
|        | 3     | MED | 3505        | 16,83 | 13,19 | 2894 | 34,0  | 14,95       | 12,62 | 2571 | 27,0  | 11,55        | 11,32 | 1987 | 13,0  | 8,75         | 8,58 | 1506 | 9,0   |
|        | 2     |     | 3240        | 16,06 | 12,45 | 2763 | 31,0  | 14,26       | 11,89 | 2453 | 25,0  | 11,00        | 10,78 | 1892 | 12,0  | 8,29         | 8,13 | 1426 | 8,0   |
|        | 1     | MIN | 2885        | 14,95 | 11,41 | 2572 | 27,0  | 13,25       | 10,86 | 2280 | 24,0  | 10,18        | 9,89  | 1752 | 11,0  | 7,65         | 7,50 | 1316 | 7,0   |

Note: the power absorption (Watt) at page 16 must be subtracted from the total and sensible cooling emission.

## Cooling emission of 4 row coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed | WT: 7/12 °C |          |          |           |              | WT: 8/13 °C |          |           |              |          | WT: 10/15 °C |           |              |          |          | WT: 12/17 °C |              |  |  |  |
|---------------|-------|-------------|----------|----------|-----------|--------------|-------------|----------|-----------|--------------|----------|--------------|-----------|--------------|----------|----------|--------------|--------------|--|--|--|
|               |       | Qv<br>m³/h  | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW    | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW | Qw<br>l/h    | Dp(c)<br>kPa |  |  |  |
| <b>MTL 14</b> | 5 MAX | 1835        | 6,05     | 5,70     | 1040      | 9,2          | 5,38        | 5,27     | 925       | 7,4          | 4,20     | 4,12         | 722       | 4,5          | 3,72     | 3,64     | 639          | 3,5          |  |  |  |
|               | 4     | 1575        | 5,54     | 5,08     | 953       | 7,9          | 4,92        | 4,82     | 846       | 6,2          | 3,82     | 3,74         | 656       | 3,8          | 3,36     | 3,30     | 579          | 2,9          |  |  |  |
|               | 3 MED | 1315        | 4,99     | 4,44     | 859       | 6,4          | 4,41        | 4,27     | 759       | 5,1          | 3,40     | 3,33         | 585       | 3,1          | 2,98     | 2,92     | 512          | 2,3          |  |  |  |
|               | 2     | 1115        | 4,52     | 3,91     | 777       | 5,4          | 3,99        | 3,75     | 686       | 4,2          | 3,05     | 2,99         | 525       | 2,5          | 2,66     | 2,61     | 457          | 1,9          |  |  |  |
|               | 1 MIN | 940         | 4,07     | 3,43     | 699       | 4,4          | 3,57        | 3,27     | 614       | 3,4          | 2,72     | 2,67         | 468       | 2,0          | 2,36     | 2,31     | 405          | 1,5          |  |  |  |
| <b>MTL 24</b> | 5 MAX | 2360        | 8,34     | 7,50     | 1434      | 15,9         | 7,41        | 7,26     | 1275      | 12,8         | 5,78     | 5,67         | 994       | 7,8          | 5,05     | 4,95     | 869          | 6,0          |  |  |  |
|               | 4     | 2005        | 7,60     | 6,64     | 1306      | 13,4         | 6,74        | 6,41     | 1159      | 10,7         | 5,22     | 5,11         | 898       | 6,5          | 4,53     | 4,44     | 779          | 4,8          |  |  |  |
|               | 3 MED | 1535        | 6,48     | 5,44     | 1115      | 10,0         | 5,73        | 5,21     | 985       | 7,9          | 4,39     | 4,30         | 755       | 4,7          | 3,77     | 3,69     | 648          | 3,4          |  |  |  |
|               | 2     | 1160        | 5,44     | 4,39     | 935       | 7,2          | 4,79        | 4,18     | 824       | 5,7          | 3,63     | 3,56         | 625       | 3,3          | 2,98     | 2,92     | 512          | 2,2          |  |  |  |
|               | 1 MIN | 855         | 4,43     | 3,45     | 762       | 4,9          | 3,89        | 3,26     | 669       | 3,8          | 2,93     | 2,87         | 504       | 2,2          | 2,23     | 2,18     | 383          | 1,3          |  |  |  |
| <b>MTL 34</b> | 5 MAX | 2745        | 10,20    | 8,93     | 1755      | 19,3         | 9,05        | 8,63     | 1557      | 15,3         | 7,05     | 6,90         | 1212      | 9,4          | 6,11     | 5,98     | 1050         | 7,0          |  |  |  |
|               | 4     | 2550        | 9,77     | 8,45     | 1680      | 17,8         | 8,68        | 8,16     | 1493      | 14,1         | 6,73     | 6,59         | 1157      | 8,6          | 5,81     | 5,70     | 1000         | 6,4          |  |  |  |
|               | 3 MED | 2265        | 9,12     | 7,74     | 1568      | 15,6         | 8,08        | 7,45     | 1390      | 12,4         | 6,23     | 6,11         | 1072      | 7,5          | 5,36     | 5,25     | 922          | 5,5          |  |  |  |
|               | 2     | 2060        | 8,63     | 7,22     | 1484      | 14,1         | 7,63        | 6,93     | 1312      | 11,1         | 5,87     | 5,75         | 1010      | 6,7          | 5,02     | 4,92     | 863          | 4,8          |  |  |  |
|               | 1 MIN | 1795        | 7,94     | 6,51     | 1366      | 12,0         | 7,00        | 6,22     | 1204      | 9,5          | 5,36     | 5,25         | 922       | 5,6          | 4,44     | 4,35     | 764          | 3,9          |  |  |  |
| <b>MTL 44</b> | 5 MAX | 3340        | 12,99    | 11,25    | 2234      | 17,1         | 11,53       | 10,86    | 1983      | 13,6         | 8,94     | 8,76         | 1537      | 8,3          | 7,72     | 7,57     | 1329         | 6,2          |  |  |  |
|               | 4     | 3085        | 12,41    | 10,61    | 2134      | 15,7         | 10,98       | 10,21    | 1889      | 12,5         | 8,49     | 8,32         | 1460      | 7,6          | 7,32     | 7,17     | 1259         | 5,6          |  |  |  |
|               | 3 MED | 2820        | 11,56    | 9,71     | 1988      | 13,8         | 10,22       | 9,32     | 1759      | 10,9         | 7,87     | 7,71         | 1353      | 6,5          | 6,74     | 6,61     | 1160         | 4,8          |  |  |  |
|               | 2     | 2560        | 10,89    | 9,02     | 1874      | 12,4         | 9,63        | 8,64     | 1656      | 9,7          | 7,38     | 7,23         | 1269      | 5,8          | 6,23     | 6,11     | 1072         | 4,1          |  |  |  |
|               | 1 MIN | 2245        | 9,98     | 8,09     | 1716      | 10,5         | 8,79        | 7,71     | 1512      | 8,2          | 6,71     | 6,57         | 1153      | 4,9          | 5,44     | 5,33     | 936          | 3,2          |  |  |  |
| <b>MTL 54</b> | 5 MAX | 4330        | 16,88    | 14,79    | 2903      | 15,8         | 14,97       | 14,24    | 2576      | 12,5         | 11,58    | 11,35        | 1991      | 7,6          | 10,17    | 9,97     | 1750         | 5,8          |  |  |  |
|               | 4     | 3920        | 15,91    | 13,72    | 2737      | 14,2         | 14,11       | 13,17    | 2426      | 11,2         | 10,86    | 10,65        | 1869      | 6,7          | 9,50     | 9,31     | 1634         | 5,1          |  |  |  |
|               | 3 MED | 3505        | 14,89    | 12,60    | 2561      | 12,5         | 13,17       | 12,06    | 2265      | 9,9          | 10,09    | 9,89         | 1736      | 5,9          | 8,79     | 8,61     | 1512         | 4,4          |  |  |  |
|               | 2     | 3240        | 14,21    | 11,87    | 2443      | 11,4         | 12,53       | 11,34    | 2156      | 9,0          | 9,58     | 9,39         | 1648      | 5,3          | 8,32     | 8,15     | 1430         | 3,9          |  |  |  |
|               | 1 MIN | 2885        | 13,20    | 10,85    | 2271      | 10,0         | 11,65       | 10,34    | 2003      | 7,8          | 8,87     | 8,69         | 1525      | 4,6          | 7,58     | 7,43     | 1304         | 3,3          |  |  |  |

Note: the power absorption (Watt) at page 16 must be subtracted from the total and sensible cooling emission.

### LEGENDA

|                                       |                           |
|---------------------------------------|---------------------------|
| <b>WT</b> = Water temperature         | <b>Speed</b> = Fan speed  |
| <b>Pc</b> = Cooling total emission    | <b>MAX</b> = High speed   |
| <b>Ps</b> = Cooling sensible emission | <b>MED</b> = Medium speed |
| <b>Qw</b> = Water flow                | <b>MIN</b> = Low speed    |
| <b>Dp(c)</b> = Water pressure drop    | <b>Qv</b> = Air flow      |



Heating emission of 3 row coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 70/60 °C |       |      | WT: 60/50 °C |       |      | WT: 55/45 °C |       |      | WT: 50/40 °C |       |      | WT: 50/45 °C |       |      | WT: 45/40 °C |       |      |       |
|--------|-------|-----|--------------|-------|------|--------------|-------|------|--------------|-------|------|--------------|-------|------|--------------|-------|------|--------------|-------|------|-------|
|        |       |     | Qv           | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c) |
|        |       |     | m³/h         | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa   |
| MTL 13 | 5     | MAX | 1925         | 16,22 | 1395 | 17,7         | 12,33 | 1060 | 11,0         | 10,39 | 894  | 8,2          | 8,44  | 726  | 5,7          | 9,89  | 1701 | 27,2         | 7,98  | 1372 | 18,6  |
|        | 4     |     | 1640         | 14,61 | 1257 | 14,6         | 11,13 | 957  | 9,1          | 9,38  | 807  | 6,8          | 7,64  | 657  | 4,7          | 8,90  | 1532 | 22,4         | 7,18  | 1236 | 15,4  |
|        | 3     | MED | 1340         | 12,74 | 1096 | 11,3         | 9,73  | 836  | 7,1          | 8,21  | 706  | 5,3          | 6,69  | 575  | 3,7          | 7,76  | 1335 | 17,4         | 6,27  | 1079 | 11,9  |
|        | 2     |     | 1140         | 11,39 | 980  | 9,2          | 8,71  | 749  | 5,8          | 7,36  | 633  | 4,3          | 6,00  | 516  | 3,0          | 6,94  | 1193 | 14,1         | 5,61  | 965  | 9,7   |
|        | 1     | MIN | 995          | 10,34 | 889  | 7,7          | 7,91  | 681  | 4,8          | 6,70  | 576  | 3,6          | 5,48  | 471  | 2,5          | 6,30  | 1083 | 11,8         | 5,09  | 876  | 8,1   |
| MTL 23 | 5     | MAX | 2510         | 21,50 | 1849 | 33,1         | 16,44 | 1414 | 20,9         | 13,91 | 1196 | 15,6         | 11,37 | 978  | 10,9         | 13,10 | 2253 | 50,6         | 10,60 | 1824 | 34,9  |
|        | 4     |     | 2060         | 18,86 | 1622 | 26,0         | 14,45 | 1243 | 16,4         | 12,24 | 1053 | 12,3         | 10,02 | 862  | 8,6          | 11,50 | 1978 | 39,8         | 9,31  | 1602 | 27,5  |
|        | 3     | MED | 1550         | 15,51 | 1334 | 18,1         | 11,92 | 1025 | 11,4         | 10,11 | 870  | 8,6          | 8,30  | 714  | 6,0          | 9,45  | 1625 | 27,7         | 7,67  | 1319 | 19,2  |
|        | 2     |     | 1165         | 12,65 | 1088 | 12,4         | 9,74  | 838  | 7,8          | 8,28  | 712  | 5,9          | 6,81  | 585  | 4,1          | 7,70  | 1324 | 18,9         | 6,25  | 1075 | 13,1  |
|        | 1     | MIN | 855          | 10,04 | 863  | 8,0          | 7,75  | 666  | 5,1          | 6,60  | 568  | 3,9          | 5,45  | 468  | 2,7          | 6,10  | 1050 | 12,3         | 4,97  | 854  | 8,6   |
| MTL 33 | 5     | MAX | 2790         | 24,90 | 2142 | 33,3         | 19,10 | 1642 | 21,1         | 16,18 | 1392 | 15,8         | 13,27 | 1141 | 11,1         | 15,19 | 2612 | 51,2         | 12,31 | 2118 | 35,4  |
|        | 4     |     | 2590         | 23,71 | 2039 | 30,4         | 18,19 | 1564 | 19,3         | 15,41 | 1325 | 14,4         | 12,63 | 1087 | 10,1         | 14,46 | 2487 | 46,7         | 11,71 | 2014 | 32,3  |
|        | 3     | MED | 2300         | 21,89 | 1882 | 26,2         | 16,80 | 1445 | 16,6         | 14,24 | 1225 | 12,4         | 11,68 | 1005 | 8,7          | 13,34 | 2294 | 40,1         | 10,81 | 1860 | 27,8  |
|        | 2     |     | 2080         | 20,41 | 1755 | 23,1         | 15,69 | 1349 | 14,6         | 13,31 | 1144 | 11,0         | 10,93 | 940  | 7,7          | 12,43 | 2138 | 35,4         | 10,08 | 1735 | 24,5  |
|        | 1     | MIN | 1815         | 18,55 | 1596 | 19,3         | 14,27 | 1227 | 12,3         | 12,12 | 1042 | 9,2          | 9,97  | 857  | 6,5          | 11,29 | 1942 | 29,6         | 9,17  | 1578 | 20,5  |
| MTL 43 | 5     | MAX | 3400         | 31,44 | 2704 | 25,0         | 24,09 | 2072 | 15,8         | 20,41 | 1755 | 11,8         | 16,69 | 1436 | 8,3          | 19,16 | 3295 | 38,4         | 15,51 | 2668 | 26,5  |
|        | 4     |     | 3130         | 29,75 | 2558 | 22,6         | 22,80 | 1960 | 14,3         | 19,29 | 1659 | 10,7         | 15,82 | 1360 | 7,5          | 18,11 | 3115 | 34,6         | 14,68 | 2525 | 23,9  |
|        | 3     | MED | 2855         | 27,34 | 2351 | 19,3         | 20,99 | 1805 | 12,2         | 17,78 | 1529 | 9,1          | 14,58 | 1254 | 6,4          | 16,65 | 2864 | 29,6         | 13,51 | 2324 | 20,5  |
|        | 2     |     | 2585         | 25,56 | 2198 | 17,0         | 19,61 | 1687 | 10,8         | 16,64 | 1431 | 8,1          | 13,66 | 1174 | 5,7          | 15,56 | 2677 | 26,1         | 12,61 | 2170 | 18,1  |
|        | 1     | MIN | 2265         | 23,03 | 1981 | 14,1         | 17,70 | 1522 | 8,9          | 15,03 | 1293 | 6,7          | 12,35 | 1062 | 4,7          | 14,01 | 2410 | 21,5         | 11,37 | 1956 | 14,9  |
| MTL 53 | 5     | MAX | 4400         | 41,01 | 3527 | 29,2         | 31,42 | 2702 | 18,4         | 26,61 | 2288 | 13,8         | 21,79 | 1874 | 9,7          | 24,97 | 4295 | 44,7         | 20,23 | 3480 | 31,0  |
|        | 4     |     | 3975         | 38,28 | 3292 | 25,7         | 29,35 | 2524 | 16,3         | 24,88 | 2140 | 12,2         | 20,39 | 1753 | 8,5          | 23,30 | 4008 | 39,4         | 18,88 | 3248 | 27,2  |
|        | 3     | MED | 3540         | 35,31 | 3037 | 22,2         | 27,14 | 2334 | 14,1         | 23,01 | 1979 | 10,5         | 18,87 | 1623 | 7,4          | 21,50 | 3698 | 34,0         | 17,45 | 3002 | 23,5  |
|        | 2     |     | 3275         | 33,45 | 2877 | 20,1         | 25,71 | 2211 | 12,7         | 21,82 | 1876 | 9,5          | 17,89 | 1539 | 6,7          | 20,38 | 3505 | 30,7         | 16,52 | 2842 | 21,3  |
|        | 1     | MIN | 2905         | 30,72 | 2642 | 17,1         | 23,64 | 2033 | 10,9         | 20,07 | 1726 | 8,1          | 16,49 | 1418 | 5,7          | 18,70 | 3217 | 26,2         | 15,18 | 2611 | 18,2  |

Heating emission of 4 row coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.   | Speed |     | WT: 60/50 °C |       |      | WT: 55/45 °C |       |      | WT: 50/40 °C |       |      | WT: 50/45 °C |       |      | WT: 45/40 °C |       |      |       |
|--------|-------|-----|--------------|-------|------|--------------|-------|------|--------------|-------|------|--------------|-------|------|--------------|-------|------|-------|
|        |       |     | Qv           | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c)        | Ph    | Qw   | Dp(c) |
|        |       |     | m³/h         | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa          | kW    | l/h  | kPa   |
| MTL 14 | 5     | MAX | 1835         | 14,20 | 1221 | 9,5          | 11,99 | 1031 | 7,1          | 9,77  | 840  | 4,9          | 11,32 | 1947 | 23,3         | 9,15  | 1574 | 16,0  |
|        | 4     |     | 1575         | 12,77 | 1098 | 7,8          | 10,80 | 929  | 5,8          | 8,82  | 759  | 4,0          | 10,16 | 1747 | 19,1         | 8,22  | 1413 | 13,1  |
|        | 3     | MED | 1315         | 11,22 | 965  | 6,1          | 9,51  | 818  | 4,6          | 7,78  | 669  | 3,2          | 8,91  | 1532 | 15,0         | 7,22  | 1241 | 10,3  |
|        | 2     |     | 1115         | 9,95  | 856  | 4,9          | 8,44  | 726  | 3,7          | 6,92  | 595  | 2,6          | 7,88  | 1356 | 11,9         | 6,39  | 1099 | 8,2   |
|        | 1     | MIN | 940          | 8,76  | 753  | 3,9          | 7,44  | 640  | 2,9          | 6,11  | 525  | 2,0          | 6,91  | 1189 | 9,4          | 5,61  | 966  | 6,5   |
| MTL 24 | 5     | MAX | 2360         | 18,71 | 1609 | 15,2         | 15,88 | 1366 | 11,4         | 13,02 | 1120 | 8,0          | 14,83 | 2552 | 36,9         | 12,03 | 2070 | 25,6  |
|        | 4     |     | 2005         | 16,69 | 1435 | 12,3         | 14,17 | 1219 | 9,2          | 11,65 | 1002 | 6,5          | 13,20 | 2271 | 29,8         | 10,72 | 1845 | 20,6  |
|        | 3     | MED | 1535         | 13,76 | 1183 | 8,6          | 11,71 | 1007 | 6,4          | 9,64  | 829  | 4,5          | 10,84 | 1865 | 20,7         | 8,82  | 1517 | 14,3  |
|        | 2     |     | 1160         | 11,13 | 957  | 5,8          | 9,49  | 816  | 4,3          | 7,84  | 674  | 3,1          | 8,75  | 1505 | 13,9         | 7,13  | 1226 | 9,6   |
|        | 1     | MIN | 855          | 8,77  | 754  | 3,7          | 7,48  | 644  | 2,8          | 6,20  | 533  | 2,0          | 6,85  | 1178 | 8,8          | 5,60  | 963  | 6,1   |
| MTL 34 | 5     | MAX | 2745         | 22,36 | 1923 | 17,7         | 19,00 | 1634 | 13,2         | 15,62 | 1343 | 9,4          | 17,67 | 3040 | 42,7         | 14,37 | 2471 | 29,5  |
|        | 4     |     | 2550         | 21,22 | 1825 | 16,1         | 18,04 | 1552 | 12,0         | 14,85 | 1277 | 8,5          | 16,77 | 2884 | 38,7         | 13,63 | 2344 | 26,8  |
|        | 3     | MED | 2265         | 19,50 | 1677 | 13,7         | 16,60 | 1427 | 10,3         | 13,67 | 1176 | 7,2          | 15,39 | 2646 | 32,9         | 12,51 | 2151 | 22,8  |
|        | 2     |     | 2060         | 18,20 | 1565 | 12,0         | 15,50 | 1333 | 9,0          | 12,78 | 1099 | 6,4          | 14,34 | 2466 | 28,9         | 11,67 | 2007 | 20,1  |
|        | 1     | MIN | 1795         | 16,43 | 1413 | 9,9          | 14,00 | 1204 | 7,5          | 11,56 | 994  | 5,3          | 12,93 | 2223 | 23,8         | 10,53 | 1811 | 16,6  |
| MTL 44 | 5     | MAX | 3340         | 28,23 | 2428 | 15,4         | 24,00 | 2064 | 11,6         | 19,75 | 1699 | 8,2          | 22,29 | 3834 | 37,3         | 18,13 | 3119 | 25,8  |
|        | 4     |     | 3085         | 26,67 | 2293 | 13,9         | 22,68 | 1951 | 10,4         | 18,67 | 1606 | 7,3          | 21,05 | 3620 | 33,5         | 17,12 | 2944 | 23,2  |
|        | 3     | MED | 2820         | 24,49 | 2106 | 11,8         | 20,84 | 1792 | 8,9          | 17,16 | 1476 | 6,3          | 19,29 | 3318 | 28,5         | 15,70 | 2700 | 19,7  |
|        | 2     |     | 2560         | 22,77 | 1958 | 10,4         | 19,40 | 1669 | 7,8          | 16,01 | 1377 | 5,5          | 17,92 | 3083 | 24,9         | 14,60 | 2512 | 17,3  |
|        | 1     | MIN | 2245         | 20,45 | 1759 | 8,4          | 17,43 | 1499 | 6,4          | 14,39 | 1238 | 4,5          | 16,06 | 2762 | 20,3         | 13,09 | 2251 | 14,1  |
| MTL 54 | 5     | MAX | 4330         | 36,49 | 3138 | 14,0         | 30,98 | 2665 | 10,5         | 25,45 | 2189 | 7,4          | 28,84 | 4960 | 33,9         | 23,43 | 4029 | 23,5  |
|        | 4     |     | 3920         | 33,96 | 2921 | 12,3         | 28,86 | 2482 | 9,2          | 23,73 | 2041 | 6,5          | 26,82 | 4613 | 29,7         | 21,80 | 3750 | 20,5  |
|        | 3     | MED | 3505         | 31,31 | 2692 | 10,6         | 26,63 | 2290 | 7,9          | 21,91 | 1884 | 5,6          | 24,69 | 4246 | 25,4         | 20,07 | 3452 | 17,6  |
|        | 2     |     | 3240         | 29,56 | 2542 | 9,5          | 25,16 | 2163 | 7,1          | 20,72 | 1782 | 5,0          | 23,27 | 4002 | 22,8         | 18,94 | 3257 | 15,8  |
|        | 1     | MIN | 2885         | 27,08 | 2329 | 8,0          | 23,06 | 1983 | 6,0          | 19,03 | 1637 | 4,2          | 21,30 | 3664 | 19,3         | 17,35 | 2984 | 13,4  |

**LEGENDA** WT = Water temperature    Dp(c) = Perdita di carico lato acqua    MAX = High speed  
 Ph = Emission    Qv = Air flow    MED = Medium speed  
 Qw = Water flow    Speed = Fan speed    MIN = Low speed

**Heating emission of 1 row additional coil**

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.         | Speed | Qv<br>m <sup>3</sup> /h | WT: 80/70 °C |           |              | WT: 75/65 °C |           |              | WT: 70/60 °C |           |              | WT: 65/55 °C |           |              | WT: 60/50 °C |           |              | WT: 55/45 °C |           |              |      |
|--------------|-------|-------------------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|------|
|              |       |                         | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa |      |
| <b>MTL 1</b> | 5     | MAX                     | 1775         | 8,05      | 692          | 42,7         | 7,26      | 624          | 36,0         | 6,47      | 556          | 29,6         | 5,67      | 488          | 23,8         | 4,89      | 420          | 18,4         | 4,10      | 352          | 13,6 |
|              | 4     |                         | 1530         | 7,44      | 640          | 37,1         | 6,71      | 577          | 31,2         | 5,99      | 515          | 25,7         | 5,25      | 452          | 20,7         | 4,52      | 389          | 16,0         | 3,80      | 326          | 11,8 |
|              | 3     | MED                     | 1290         | 6,78      | 583          | 31,3         | 6,12      | 527          | 26,4         | 5,46      | 470          | 21,8         | 4,80      | 412          | 17,5         | 4,13      | 355          | 13,6         | 3,47      | 298          | 10,0 |
|              | 2     |                         | 1090         | 6,18      | 532          | 26,4         | 5,59      | 480          | 22,3         | 4,98      | 428          | 18,4         | 4,38      | 377          | 14,8         | 3,77      | 324          | 11,5         | 3,17      | 272          | 8,5  |
|              | 1     | MIN                     | 910          | 5,57      | 479          | 21,9         | 5,03      | 433          | 18,5         | 4,49      | 387          | 15,3         | 3,95      | 340          | 12,2         | 3,40      | 293          | 9,5          | 2,86      | 246          | 7,1  |
| <b>MTL 2</b> | 5     | MAX                     | 2285         | 10,33     | 888          | 62,2         | 9,32      | 802          | 52,6         | 8,30      | 714          | 43,5         | 7,31      | 628          | 35,0         | 6,30      | 542          | 27,2         | 5,30      | 456          | 20,1 |
|              | 4     |                         | 1965         | 9,56      | 822          | 54,2         | 8,64      | 743          | 45,7         | 7,71      | 663          | 37,7         | 6,78      | 583          | 30,5         | 5,84      | 502          | 23,7         | 4,91      | 423          | 17,6 |
|              | 3     | MED                     | 1520         | 8,35      | 718          | 42,4         | 7,53      | 648          | 35,8         | 6,73      | 579          | 29,6         | 5,91      | 509          | 23,8         | 5,11      | 439          | 18,6         | 4,30      | 370          | 13,8 |
|              | 2     |                         | 1155         | 7,14      | 614          | 31,9         | 6,45      | 555          | 27,0         | 5,76      | 495          | 22,3         | 5,07      | 436          | 18,0         | 4,39      | 377          | 14,0         | 3,69      | 318          | 10,4 |
|              | 1     | MIN                     | 850          | 5,90      | 507          | 22,5         | 5,33      | 458          | 19,1         | 4,76      | 410          | 15,7         | 4,20      | 361          | 12,7         | 3,63      | 312          | 9,9          | 3,06      | 263          | 7,4  |
| <b>MTL 3</b> | 5     | MAX                     | 2700         | 12,44     | 1070         | 39,0         | 11,21     | 964          | 32,9         | 9,99      | 859          | 27,1         | 8,77      | 754          | 21,7         | 7,55      | 649          | 16,8         | 6,33      | 544          | 12,4 |
|              | 4     |                         | 2510         | 11,98     | 1031         | 36,4         | 10,80     | 929          | 30,7         | 9,64      | 829          | 25,3         | 8,45      | 727          | 20,3         | 7,28      | 626          | 15,7         | 6,10      | 524          | 11,6 |
|              | 3     | MED                     | 2235         | 11,28     | 970          | 32,7         | 10,17     | 874          | 27,6         | 9,07      | 780          | 22,7         | 7,96      | 685          | 18,2         | 6,86      | 590          | 14,1         | 5,75      | 494          | 10,4 |
|              | 2     |                         | 2040         | 10,74     | 924          | 29,9         | 9,68      | 833          | 25,2         | 8,64      | 743          | 20,8         | 7,59      | 653          | 16,7         | 6,53      | 562          | 13,0         | 5,48      | 472          | 9,6  |
|              | 1     | MIN                     | 1780         | 9,97      | 857          | 26,2         | 9,00      | 774          | 22,0         | 8,03      | 691          | 18,2         | 7,06      | 607          | 14,6         | 6,07      | 522          | 11,3         | 5,10      | 439          | 8,4  |
| <b>MTL 4</b> | 5     | MAX                     | 3295         | 16,17     | 1391         | 68,3         | 14,61     | 1256         | 57,9         | 13,03     | 1121         | 47,8         | 11,48     | 988          | 38,6         | 9,92      | 853          | 30,1         | 8,36      | 719          | 22,4 |
|              | 4     |                         | 3055         | 15,52     | 1335         | 63,5         | 14,02     | 1206         | 53,7         | 12,52     | 1077         | 44,5         | 11,04     | 949          | 35,8         | 9,53      | 819          | 27,9         | 8,03      | 691          | 20,8 |
|              | 3     | MED                     | 2790         | 14,59     | 1255         | 57,0         | 13,20     | 1135         | 48,2         | 11,80     | 1015         | 39,9         | 10,37     | 892          | 32,1         | 8,97      | 771          | 25,1         | 7,56      | 650          | 18,7 |
|              | 2     |                         | 2535         | 13,86     | 1192         | 51,8         | 12,52     | 1077         | 43,8         | 11,20     | 963          | 36,3         | 9,86      | 848          | 29,2         | 8,52      | 732          | 22,8         | 7,18      | 617          | 17,0 |
|              | 1     | MIN                     | 2225         | 12,82     | 1102         | 44,9         | 11,57     | 995          | 37,9         | 10,34     | 890          | 31,5         | 9,12      | 784          | 25,3         | 7,88      | 677          | 19,8         | 6,65      | 572          | 14,8 |
| <b>MTL 5</b> | 5     | MAX                     | 4265         | 20,57     | 1769         | 63,1         | 18,57     | 1597         | 53,2         | 16,58     | 1426         | 44,1         | 14,61     | 1257         | 35,6         | 12,62     | 1086         | 27,7         | 10,63     | 914          | 20,6 |
|              | 4     |                         | 3875         | 19,53     | 1680         | 57,5         | 17,66     | 1519         | 48,6         | 15,77     | 1356         | 40,2         | 13,88     | 1193         | 32,4         | 12,00     | 1032         | 25,3         | 10,10     | 869          | 18,8 |
|              | 3     | MED                     | 3475         | 18,40     | 1583         | 51,6         | 16,65     | 1432         | 43,6         | 14,85     | 1277         | 36,1         | 13,09     | 1125         | 29,2         | 11,31     | 973          | 22,7         | 9,54      | 820          | 16,9 |
|              | 2     |                         | 3210         | 17,63     | 1516         | 47,6         | 15,93     | 1370         | 40,2         | 14,25     | 1225         | 33,3         | 12,54     | 1078         | 26,9         | 10,85     | 933          | 20,9         | 9,14      | 786          | 15,6 |
|              | 1     | MIN                     | 2865         | 16,56     | 1424         | 42,4         | 14,97     | 1287         | 35,9         | 13,37     | 1150         | 29,7         | 11,78     | 1013         | 24,0         | 10,19     | 876          | 18,7         | 8,59      | 739          | 13,9 |

**Heating emission of 2 row additional coil**

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.         | Speed | Qv<br>m <sup>3</sup> /h | WT: 65/55 °C |           |              | WT: 60/50 °C |           |              | WT: 55/45 °C |           |              | WT: 50/40 °C |           |              | WT: 45/40 °C |           |              | WT: 45/35 °C |           |              |     |
|--------------|-------|-------------------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|--------------|-----------|--------------|-----|
|              |       |                         | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Ph<br>kW     | Qw<br>l/h | Dp(c)<br>kPa |     |
| <b>MTL 1</b> | 5     | MAX                     | 1695         | 11,59     | 997          | 20,4         | 10,00     | 860          | 15,9         | 8,41      | 723          | 11,7         | 6,82      | 586          | 8,1          | 6,47      | 1112         | 26,7         | 5,22      | 449          | 5,0 |
|              | 4     |                         | 1470         | 10,60     | 912          | 17,3         | 9,17      | 788          | 13,4         | 7,72      | 664          | 9,9          | 6,26      | 538          | 6,9          | 5,92      | 1018         | 22,6         | 4,80      | 413          | 4,3 |
|              | 3     | MED                     | 1260         | 9,62      | 827          | 14,4         | 8,31      | 715          | 11,2         | 7,00      | 602          | 8,3          | 5,69      | 490          | 5,8          | 5,37      | 924          | 18,9         | 4,37      | 376          | 3,6 |
|              | 2     |                         | 1055         | 8,57      | 737          | 11,6         | 7,41      | 637          | 9,1          | 6,25      | 538          | 6,7          | 5,09      | 438          | 4,7          | 4,78      | 822          | 15,2         | 3,92      | 337          | 2,9 |
|              | 1     | MIN                     | 875          | 7,55      | 649          | 9,2          | 6,53      | 562          | 7,2          | 5,52      | 474          | 5,3          | 4,50      | 387          | 3,7          | 4,21      | 724          | 12,1         | 3,47      | 299          | 2,3 |
| <b>MTL 2</b> | 5     | MAX                     | 2190         | 15,33     | 1318         | 32,8         | 13,27     | 1141         | 25,5         | 11,21     | 964          | 19,0         | 9,14      | 786          | 13,3         | 8,57      | 1474         | 43,0         | 7,07      | 608          | 8,4 |
|              | 4     |                         | 1910         | 14,07     | 1210         | 28,0         | 12,18     | 1048         | 21,8         | 10,31     | 887          | 16,3         | 8,41      | 724          | 11,4         | 7,87      | 1353         | 36,6         | 6,52      | 561          | 7,2 |
|              | 3     | MED                     | 1505         | 12,07     | 1038         | 21,0         | 10,47     | 900          | 16,5         | 8,87      | 763          | 12,3         | 7,25      | 623          | 8,6          | 6,74      | 1160         | 27,5         | 5,63      | 484          | 5,4 |
|              | 2     |                         | 1145         | 10,03     | 862          | 15,0         | 8,71      | 749          | 11,7         | 7,38      | 635          | 8,7          | 6,05      | 521          | 6,1          | 5,60      | 964          | 19,6         | 4,72      | 406          | 3,9 |
|              | 1     | MIN                     | 845          | 8,09      | 695          | 10,0         | 7,03      | 605          | 7,8          | 5,97      | 513          | 5,9          | 4,91      | 422          | 4,1          | 4,51      | 776          | 13,1         | 3,84      | 330          | 2,6 |
| <b>MTL 3</b> | 5     | MAX                     | 2645         | 18,47     | 1589         | 20,0         | 15,97     | 1373         | 15,5         | 13,46     | 1157         | 11,6         | 10,94     | 941          | 8,0          | 10,33     | 1777         | 26,2         | 8,40      | 722          | 5,0 |
|              | 4     |                         | 2455         | 17,64     | 1517         | 18,4         | 15,24     | 1311         | 14,3         | 12,86     | 1106         | 10,6         | 10,44     | 898          | 7,4          | 9,85      | 1694         | 24,0         | 8,04      | 691          | 4,6 |
|              | 3     | MED                     | 2195         | 16,43     | 1413         | 16,1         | 14,22     | 1223         | 12,5         | 11,99     | 1031         | 9,3          | 9,76      | 839          | 6,5          | 9,18      | 1580         | 21,1         | 7,51      | 646          | 4,0 |
|              | 2     |                         | 2010         | 15,54     | 1336         | 14,5         | 13,44     | 1156         | 11,3         | 11,33     | 975          | 8,4          | 9,24      | 795          | 5,8          | 8,67      | 1492         | 19,0         | 7,12      | 613          | 3,7 |
|              | 1     | MIN                     | 1765         | 14,27     | 1227         | 12,4         | 12,35     | 1062         | 9,7          | 10,44     | 898          | 7,2          | 8,51      | 731          | 5,0          | 7,96      | 1370         | 16,2         | 6,57      | 565          | 3,1 |
| <b>MTL 4</b> | 5     | MAX                     | 3230         | 23,95     | 2060         | 35,6         | 20,75     | 1785         | 27,8         | 17,57     | 1511         | 20,8         | 14,37     | 1236         | 14,5         | 13,40     | 2305         | 46,6         | 11,17     | 960          | 9,2 |
|              | 4     |                         | 3005         | 22,83     | 1963         | 32,5         | 19,79     | 1702         | 25,4         | 16,76     | 1441         | 19,0         | 13,72     | 1180         | 13,3         | 12,77     | 2196         | 42,6         | 10,66     | 917          | 8,5 |
|              | 3     | MED                     | 2745         | 21,25     | 1827         | 28,4         | 18,46     | 1587         | 22,3         | 15,62     | 1343         | 16,7         | 12,80     | 1101         | 11,7         | 11,88     | 2044         | 37,4         | 9,95      | 856          | 7,4 |
|              | 2     |                         | 2500         | 19,95     | 1716         | 25,3         | 17,33     | 1490         | 19,8         | 14,69     | 1264         | 14,8         | 12,04     | 1035         | 10,4         | 11,17     | 1920         | 33,3         | 9,38      | 807          | 6,6 |
|              | 1     | MIN                     | 2205         | 18,19     | 1565         | 21,3         | 15,80     | 1359         | 16,7         | 13,41     | 1153         | 12,5         | 11,01     | 947          | 8,8          | 10,17     | 1749         | 28,0         | 8,57      | 737          | 5,6 |
| <b>MTL 5</b> | 5     | MAX                     | 4170         | 29,93     | 2574         | 30,4         | 25,94     | 2231         | 23,7         | 21,94     | 1886         | 17,7         | 17,90     | 1539         | 12,4         | 16,73     | 2877         | 39,9         | 13,85     | 1192         | 7,8 |
|              | 4     |                         | 3810         | 28,30     | 2434         | 27,4         | 24,51     | 2107         | 21,3         | 20,74     | 1784         | 15,9         | 16,93     | 1456         | 11,2         | 15,82     | 2720         | 35,8         | 13,13     | 1129         | 7,1 |
|              | 3     | MED                     | 3430         | 26,44     | 2274         | 24,2         | 22,94     | 1973         | 18,9         | 19,42     | 1670         | 14,1         | 15,87     | 1365         | 9,8          | 14,79     | 2543         | 31,6         | 12,31     | 1059         | 6,2 |
|              | 2     |                         | 3165         | 25,10     | 2158         | 21,9         | 21,77     | 1872         | 17,2         | 18,43     | 1585         | 12,8         | 15,08     | 1297         | 9,0          | 14,03     | 2414         | 28,7         | 11,71     | 1007         | 5,7 |
|              | 1     | MIN                     | 2825         | 23,30     | 2004         | 19,1         | 20,21     | 1738         | 14,9         | 17,13     | 1473         | 11,2         | 14,02     | 1205         | 7,8          | 13,02     | 2240         | 25,0         | 10,90     | 938          | 5,0 |

**LEGENDA** WT = Water temperature      Dp(c) = Perdita di carico lato acqua      MAX = High speed  
 Ph = Emission                              Qv = Air flow                                      MED = Medium speed  
 Qw = Water flow                              Speed = Fan speed                                      MIN = Low speed

**Air flow (m<sup>3</sup>/h)**  
depending on speed and requested available pressure with 4 row coil

| Mod.         | Velocità |     | Available pressure (Pa) |      |      |      |      |      |      |      |      |      |      |
|--------------|----------|-----|-------------------------|------|------|------|------|------|------|------|------|------|------|
|              |          |     | 0                       | 20   | 40   | 60   | 80   | 100  | 120  | 140  | 160  | 180  | 200  |
| <b>MTL 1</b> | 5        | MAX | 1835                    | 1745 | 1640 | 1530 | 1400 | 1225 | 995  | –    | –    | –    | –    |
|              | 4        |     | 1575                    | 1480 | 1390 | 1290 | 1175 | 1020 | 815  | –    | –    | –    | –    |
|              | 3        | MED | 1315                    | 1250 | 1175 | 1075 | 940  | 795  | –    | –    | –    | –    | –    |
|              | 2        |     | 1115                    | 1025 | 940  | 840  | 740  | 625  | –    | –    | –    | –    | –    |
|              | 1        | MIN | 940                     | 825  | 730  | 645  | 560  | –    | –    | –    | –    | –    | –    |
| <b>MTL 2</b> | 5        | MAX | 2360                    | 2240 | 2120 | 2000 | 1860 | 1700 | 1480 | 1150 | –    | –    | –    |
|              | 4        |     | 2005                    | 1920 | 1835 | 1735 | 1620 | 1480 | 1275 | –    | –    | –    | –    |
|              | 3        | MED | 1535                    | 1495 | 1445 | 1380 | 1300 | 1190 | 1010 | –    | –    | –    | –    |
|              | 2        |     | 1160                    | 1150 | 1135 | 1105 | 1065 | 1015 | 925  | –    | –    | –    | –    |
|              | 1        | MIN | 855                     | 835  | 815  | 790  | 755  | 700  | –    | –    | –    | –    | –    |
| <b>MTL 3</b> | 5        | MAX | 2745                    | 2670 | 2590 | 2500 | 2390 | 2270 | 2135 | 1980 | 1800 | 1620 | –    |
|              | 4        |     | 2550                    | 2470 | 2380 | 2280 | 2175 | 2045 | 1900 | 1750 | 1595 | 1425 | –    |
|              | 3        | MED | 2265                    | 2200 | 2120 | 2040 | 1945 | 1840 | 1720 | 1590 | 1440 | 1280 | –    |
|              | 2        |     | 2060                    | 2005 | 1945 | 1875 | 1790 | 1695 | 1575 | 1445 | 1300 | –    | –    |
|              | 1        | MIN | 1795                    | 1745 | 1690 | 1625 | 1545 | 1460 | 1355 | 1235 | 1105 | –    | –    |
| <b>MTL 4</b> | 5        | MAX | 3340                    | 3250 | 3150 | 3040 | 2900 | 2760 | 2610 | 2440 | 2225 | 2000 | 1780 |
|              | 4        |     | 3085                    | 3005 | 2920 | 2820 | 2700 | 2575 | 2405 | 2225 | 2025 | 1800 | –    |
|              | 3        | MED | 2820                    | 2740 | 2650 | 2550 | 2440 | 2300 | 2150 | 1970 | 1765 | 1575 | –    |
|              | 2        |     | 2560                    | 2480 | 2400 | 2305 | 2200 | 2050 | 1905 | 1745 | 1575 | –    | –    |
|              | 1        | MIN | 2245                    | 2175 | 2100 | 2020 | 1925 | 1800 | 1670 | 1525 | 1400 | –    | –    |
| <b>MTL 5</b> | 5        | MAX | 4330                    | 4330 | 4205 | 4075 | 3935 | 3785 | 3630 | 3450 | 3250 | 3005 | 2705 |
|              | 4        |     | 3920                    | 3820 | 3715 | 3595 | 3465 | 3315 | 3145 | 2940 | 2680 | 2350 | –    |
|              | 3        | MED | 3505                    | 3425 | 3340 | 3245 | 3130 | 3000 | 2845 | 2650 | 2400 | 2080 | –    |
|              | 2        |     | 3240                    | 3140 | 3040 | 2930 | 2810 | 2675 | 2530 | 2350 | 2130 | 1850 | –    |
|              | 1        | MIN | 2885                    | 2805 | 2715 | 2610 | 2495 | 2350 | 2175 | 1965 | 1710 | –    | –    |

**Power absorption (Watt)**  
depending on air flow and available pressure

| Mod.         | Velocità |     | Available pressure (Pa) |     |     |     |     |     |     |     |     |     |     |
|--------------|----------|-----|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              |          |     | 0                       | 20  | 40  | 60  | 80  | 100 | 120 | 140 | 160 | 180 | 200 |
| <b>MTL 1</b> | 5        | MAX | 231                     | 223 | 213 | 202 | 190 | 174 | 154 | –   | –   | –   | –   |
|              | 4        |     | 204                     | 194 | 184 | 174 | 162 | 148 | 130 | –   | –   | –   | –   |
|              | 3        | MED | 173                     | 167 | 159 | 150 | 137 | 124 | –   | –   | –   | –   | –   |
|              | 2        |     | 151                     | 142 | 134 | 125 | 116 | 106 | –   | –   | –   | –   | –   |
|              | 1        | MIN | 130                     | 118 | 109 | 102 | 95  | –   | –   | –   | –   | –   | –   |
| <b>MTL 2</b> | 5        | MAX | 380                     | 356 | 333 | 312 | 288 | 263 | 232 | 193 | –   | –   | –   |
|              | 4        |     | 323                     | 304 | 284 | 263 | 240 | 217 | 191 | –   | –   | –   | –   |
|              | 3        | MED | 268                     | 254 | 239 | 222 | 204 | 184 | 158 | –   | –   | –   | –   |
|              | 2        |     | 221                     | 215 | 206 | 191 | 177 | 165 | 151 | –   | –   | –   | –   |
|              | 1        | MIN | 179                     | 167 | 158 | 148 | 137 | 126 | –   | –   | –   | –   | –   |
| <b>MTL 3</b> | 5        | MAX | 519                     | 510 | 498 | 481 | 460 | 438 | 415 | 393 | 372 | 352 | –   |
|              | 4        |     | 505                     | 492 | 473 | 450 | 427 | 400 | 376 | 357 | 340 | 323 | –   |
|              | 3        | MED | 464                     | 450 | 431 | 411 | 389 | 368 | 349 | 332 | 317 | 301 | –   |
|              | 2        |     | 426                     | 413 | 398 | 381 | 362 | 344 | 326 | 310 | 295 | –   | –   |
|              | 1        | MIN | 380                     | 362 | 345 | 330 | 316 | 305 | 294 | 283 | 270 | –   | –   |
| <b>MTL 4</b> | 5        | MAX | 680                     | 657 | 627 | 597 | 562 | 532 | 504 | 476 | 447 | 419 | 393 |
|              | 4        |     | 600                     | 587 | 566 | 541 | 512 | 485 | 453 | 427 | 402 | 378 | –   |
|              | 3        | MED | 550                     | 527 | 503 | 481 | 459 | 436 | 413 | 389 | 362 | 338 | –   |
|              | 2        |     | 505                     | 482 | 460 | 437 | 415 | 389 | 369 | 349 | 329 | –   | –   |
|              | 1        | MIN | 445                     | 425 | 405 | 387 | 368 | 348 | 331 | 314 | 299 | –   | –   |
| <b>MTL 5</b> | 5        | MAX | 867                     | 867 | 836 | 806 | 777 | 747 | 719 | 688 | 657 | 622 | 583 |
|              | 4        |     | 766                     | 739 | 713 | 686 | 659 | 630 | 601 | 569 | 533 | 492 | –   |
|              | 3        | MED | 689                     | 660 | 634 | 607 | 580 | 554 | 528 | 501 | 471 | 435 | –   |
|              | 2        |     | 612                     | 587 | 563 | 540 | 517 | 493 | 470 | 444 | 416 | 384 | –   |
|              | 1        | MIN | 536                     | 516 | 496 | 475 | 454 | 431 | 406 | 380 | 353 | –   | –   |

Correction factors for Total cooling emission


| Mod.         | Velocità |     | Available pressure (Pa) |      |      |      |      |      |      |      |      |      |      |
|--------------|----------|-----|-------------------------|------|------|------|------|------|------|------|------|------|------|
|              |          |     | 0                       | 20   | 40   | 60   | 80   | 100  | 120  | 140  | 160  | 180  | 200  |
| <b>MTL 1</b> | 5        | MAX | 1,00                    | 0,97 | 0,94 | 0,91 | 0,86 | 0,79 | 0,70 | –    | –    | –    | –    |
|              | 4        |     | 1,00                    | 0,97 | 0,94 | 0,90 | 0,85 | 0,78 | 0,67 | –    | –    | –    | –    |
|              | 3        | MED | 1,00                    | 0,97 | 0,94 | 0,90 | 0,83 | 0,75 | –    | –    | –    | –    | –    |
|              | 2        |     | 1,00                    | 0,96 | 0,91 | 0,86 | 0,79 | 0,71 | –    | –    | –    | –    | –    |
|              | 1        | MIN | 1,00                    | 0,93 | 0,87 | 0,81 | 0,74 | –    | –    | –    | –    | –    | –    |
| <b>MTL 2</b> | 5        | MAX | 1,00                    | 0,97 | 0,94 | 0,92 | 0,88 | 0,83 | 0,76 | 0,12 | –    | –    | –    |
|              | 4        |     | 1,00                    | 0,98 | 0,95 | 0,93 | 0,89 | 0,85 | 0,77 | –    | –    | –    | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,87 | 0,79 | –    | –    | –    | –    |
|              | 2        |     | 1,00                    | 0,99 | 0,99 | 0,97 | 0,96 | 0,93 | 0,88 | –    | –    | –    | –    |
|              | 1        | MIN | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,90 | –    | –    | –    | –    | –    |
| <b>MTL 3</b> | 5        | MAX | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,87 | 0,83 | 0,79 | 0,74 | –    |
|              | 4        |     | 1,00                    | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,85 | 0,81 | 0,76 | 0,71 | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,89 | 0,86 | 0,82 | 0,77 | 0,71 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,86 | 0,82 | 0,77 | –    | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,89 | 0,86 | 0,81 | 0,76 | –    | –    |
| <b>MTL 4</b> | 5        | MAX | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,87 | 0,84 | 0,79 | 0,74 | 0,69 |
|              | 4        |     | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,91 | 0,87 | 0,83 | 0,79 | 0,73 | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,86 | 0,82 | 0,76 | 0,71 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,89 | 0,85 | 0,81 | 0,76 | –    | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,89 | 0,85 | 0,80 | 0,76 | –    | –    |
| <b>MTL 5</b> | 5        | MAX | 1,00                    | 1,00 | 0,98 | 0,97 | 0,95 | 0,93 | 0,91 | 0,88 | 0,85 | 0,81 | 0,76 |
|              | 4        |     | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,91 | 0,89 | 0,85 | 0,81 | 0,74 | –    |
|              | 3        | MED | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,92 | 0,89 | 0,86 | 0,81 | 0,74 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,87 | 0,84 | 0,79 | 0,72 | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,86 | 0,80 | 0,74 | –    | –    |

Correction factors  
for Sensible cooling emission and Heating emission

| Mod.         | Velocità |     | Available pressure (Pa) |      |      |      |      |      |      |      |      |      |      |
|--------------|----------|-----|-------------------------|------|------|------|------|------|------|------|------|------|------|
|              |          |     | 0                       | 20   | 40   | 60   | 80   | 100  | 120  | 140  | 160  | 180  | 200  |
| <b>MTL 1</b> | 5        | MAX | 1,00                    | 0,96 | 0,92 | 0,88 | 0,82 | 0,75 | 0,64 | –    | –    | –    | –    |
|              | 4        |     | 1,00                    | 0,96 | 0,92 | 0,87 | 0,81 | 0,73 | 0,61 | –    | –    | –    | –    |
|              | 3        | MED | 1,00                    | 0,96 | 0,92 | 0,87 | 0,79 | 0,69 | –    | –    | –    | –    | –    |
|              | 2        |     | 1,00                    | 0,94 | 0,89 | 0,82 | 0,74 | 0,65 | –    | –    | –    | –    | –    |
|              | 1        | MIN | 1,00                    | 0,91 | 0,83 | 0,76 | 0,68 | –    | –    | –    | –    | –    | –    |
| <b>MTL 2</b> | 5        | MAX | 1,00                    | 0,96 | 0,93 | 0,89 | 0,84 | 0,79 | 0,71 | 0,07 | –    | –    | –    |
|              | 4        |     | 1,00                    | 0,97 | 0,94 | 0,90 | 0,86 | 0,80 | 0,72 | –    | –    | –    | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,96 | 0,93 | 0,89 | 0,83 | 0,74 | –    | –    | –    | –    |
|              | 2        |     | 1,00                    | 0,99 | 0,98 | 0,97 | 0,94 | 0,91 | 0,85 | –    | –    | –    | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,87 | –    | –    | –    | –    | –    |
| <b>MTL 3</b> | 5        | MAX | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,87 | 0,84 | 0,79 | 0,74 | 0,68 | –    |
|              | 4        |     | 1,00                    | 0,98 | 0,95 | 0,92 | 0,89 | 0,85 | 0,81 | 0,76 | 0,71 | 0,65 | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,95 | 0,93 | 0,90 | 0,86 | 0,82 | 0,77 | 0,72 | 0,66 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,87 | 0,83 | 0,77 | 0,71 | –    | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,86 | 0,82 | 0,76 | 0,70 | –    | –    |
| <b>MTL 4</b> | 5        | MAX | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,87 | 0,84 | 0,80 | 0,74 | 0,69 | 0,63 |
|              | 4        |     | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,88 | 0,84 | 0,79 | 0,74 | 0,67 | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,87 | 0,82 | 0,77 | 0,71 | 0,65 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,85 | 0,81 | 0,76 | 0,70 | –    | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,95 | 0,93 | 0,90 | 0,85 | 0,81 | 0,76 | 0,71 | –    | –    |
| <b>MTL 5</b> | 5        | MAX | 1,00                    | 1,00 | 0,98 | 0,96 | 0,93 | 0,91 | 0,88 | 0,85 | 0,81 | 0,77 | 0,71 |
|              | 4        |     | 1,00                    | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,85 | 0,81 | 0,76 | 0,69 | –    |
|              | 3        | MED | 1,00                    | 0,98 | 0,97 | 0,95 | 0,92 | 0,90 | 0,86 | 0,82 | 0,76 | 0,68 | –    |
|              | 2        |     | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,87 | 0,84 | 0,79 | 0,74 | 0,66 | –    |
|              | 1        | MIN | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,86 | 0,82 | 0,76 | 0,68 | –    | –    |



2 pipe units

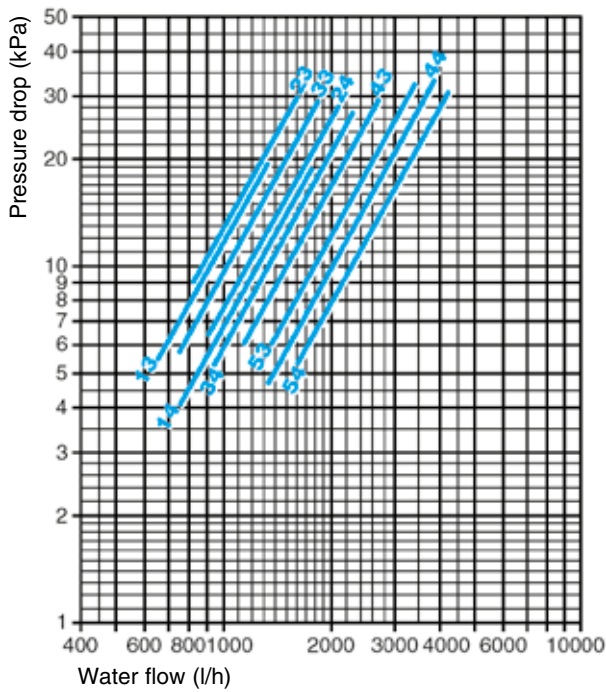


The water pressure drop figures refer to a mean water temperature of **10°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.

| °C       | 20   | 30   | 40   | 50   | 60   | 70   | 80   |
|----------|------|------|------|------|------|------|------|
| <b>K</b> | 0,94 | 0,90 | 0,86 | 0,82 | 0,78 | 0,74 | 0,70 |

4 pipe units

(heating coil pressure drop)

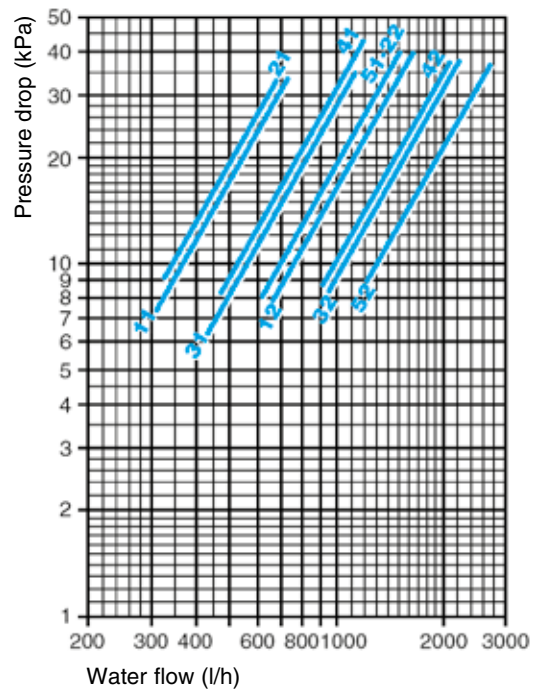


The water pressure drop figures refer to a mean water temperature of **60°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.


| °C       | 40   | 50   | 70   | 80   |
|----------|------|------|------|------|
| <b>K</b> | 1,12 | 1,06 | 0,94 | 0,88 |

Accessory air side pressure drop

Spigot plenum pressure drop

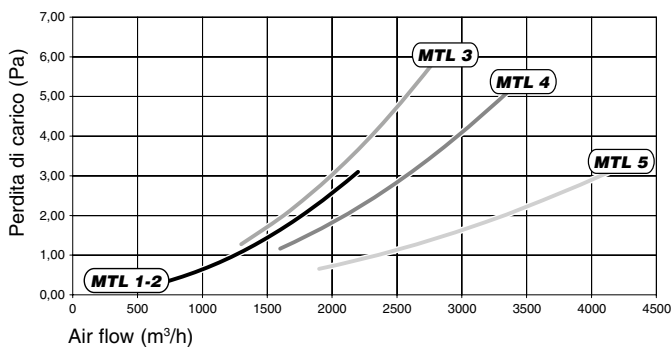

48 mm G3 filter pressure drop

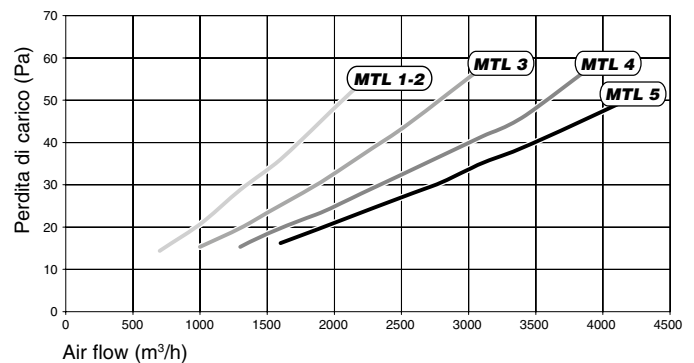

Following many years of experience in the field of heating and air conditioning, Sabiana has developed a range of Maestro fan coils for concealed installation and connection to a duct system.

Sizes 6÷7 supply a consistent air flow with static pressure up to 250 Pa to fit most conditions, with the combination of either 4 or 6 row heating coils and 2 or 4 pipe configurations with 2 row additional heating coil.

The fan assembly has 3 speeds.

## Compliant with ERP 2015 Regulation (EU) No. 327/2011

---

### Construction features

---

#### CASING

It is made with 1,2 mm galvanized steel for sizes 6-7, insulated with 10 mm polyolefin (PO) foam (class M1).

#### FAN ASSEMBLY

Consists of quiet centrifugal fans with two impellers and a directly driven single phase, three speed motor, 230V 50Hz, with external rotor, capacitor, insulation class F.


#### COIL

It is manufactured from drawn copper tube and the aluminium fins are mechanically bonded onto the tube by an expansion process.

The Maestro range Sabiana (sizes 6÷7) is available with the combination of either 4 or 6 row coils with the possibility to add a 2 row coil (4+2, 6+2 versions for 4 pipe systems).

**The connections are on the left hand side looking from the air inlet of the unit (see picture and drawing to the next page).** On request the connections can be moved to the other side.

The heat exchanger is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.

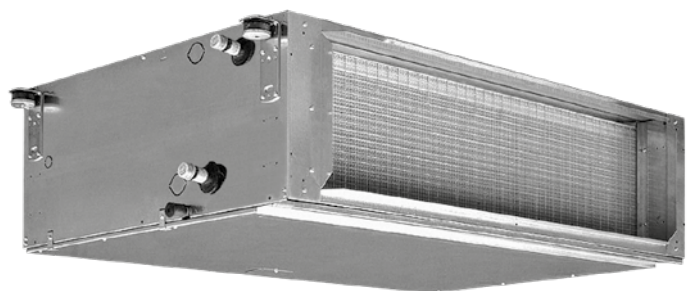



#### FILTER

The filter is made of polypropylene cellular fabric regenerating filter. The filter frame of galvanized steel is inserted into sliding guides fastened to the internal structure for easy insertion and removal of the filter.


#### CONDENSATE COLLECTION TRAY

It is made from galvanized steel insulated with 3 mm polyolefin (PO) foam (class M1).


**Left connections (standard)**

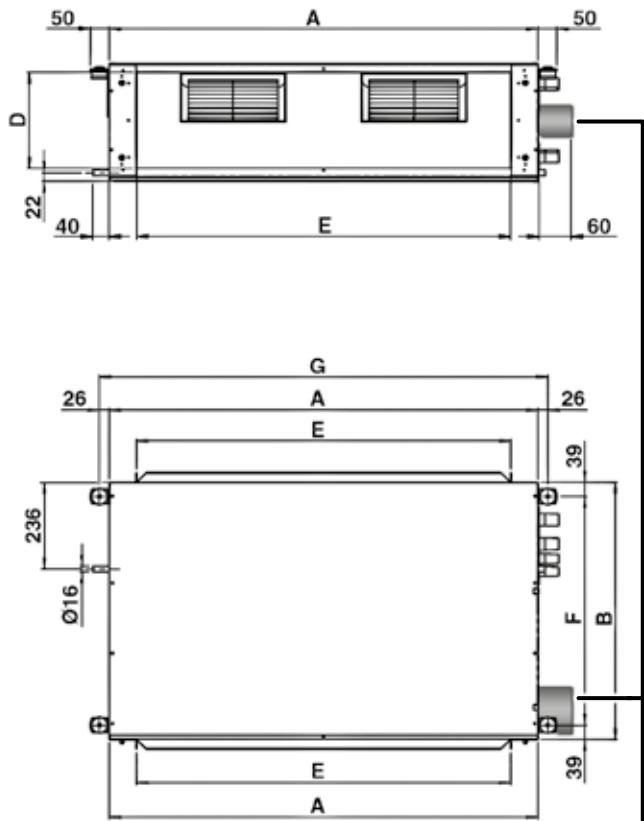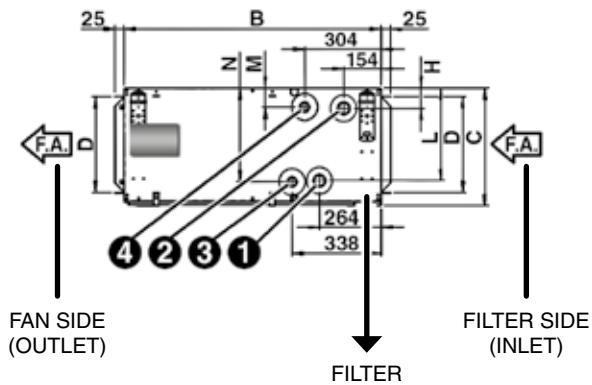

**Right connections (on request)**

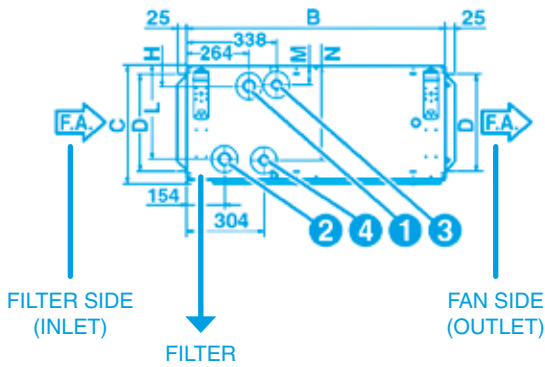

**STANDARD**

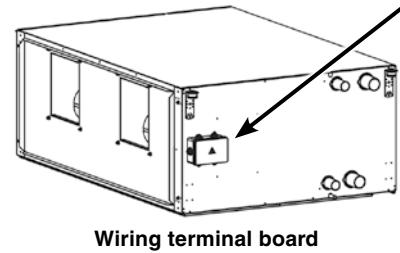


| MODEL        | Dimensions (mm) |      |     |     |      |      |      |    |     |    |     | Coil   |        |            |       |
|--------------|-----------------|------|-----|-----|------|------|------|----|-----|----|-----|--------|--------|------------|-------|
|              | A               | B    | C   | D   | E    | F    | G    | H  | L   | M  | N   | Main   |        | Additional |       |
|              |                 |      |     |     |      |      |      |    |     |    |     | ① IN   | ② OUT  | ③ IN       | ④ OUT |
| <b>MTL 6</b> | 1535            | 1100 | 488 | 421 | 1393 | 1022 | 1587 | 59 | 416 | 55 | 421 | 1 1/4" | 1 1/4" | 1"         | 1"    |
| <b>MTL 7</b> | 1535            | 1100 | 588 | 521 | 1393 | 1022 | 1587 | 59 | 516 | 55 | 521 | 1 1/4" | 1 1/4" | 1"         | 1"    |

| MODEL        | Weight without packaging (kg) |      |     |      | Weight with packaging (kg) |      |     |      | Water content (l) |      |     |
|--------------|-------------------------------|------|-----|------|----------------------------|------|-----|------|-------------------|------|-----|
|              | 4R                            | 4+2R | 6R  | 6+2R | 4R                         | 4+2R | 6R  | 6+2R | 4R                | 6R   | 2R  |
| <b>MTL 6</b> | 124                           | 134  | 130 | 140  | 127                        | 137  | 133 | 143  | 7,6               | 11,1 | 4,1 |
| <b>MTL 7</b> | 140                           | 152  | 148 | 160  | 143                        | 155  | 151 | 163  | 9,7               | 13,8 | 5,5 |

|                      |                                            |                                            |
|----------------------|--------------------------------------------|--------------------------------------------|
| <b>Water circuit</b> | Maximum water pressure: 1000 kPa (10 bars) | MIN. entering water temperature: +5°C      |
|                      |                                            | MAX. entering water temperature: +80°C     |
| <b>Air flow</b>      | Suitable relative humidity 15-75%          | MIN. entering air temperature: +6°C        |
|                      |                                            | MAX. entering air temperature: +40°C       |
|                      |                                            | <b>MAX. leaving air temperature: +50°C</b> |
| <b>Supply</b>        | Single phase 230V 50Hz                     |                                            |

### Motor electrical data (max. absorption)

| <b>MODEL</b>                |   | <b>MTL 6</b> | <b>MTL 7</b> |
|-----------------------------|---|--------------|--------------|
| <b>230/1</b><br><b>50Hz</b> | W | 1437         | 2817         |
|                             | A | 6,38         | 12,40        |

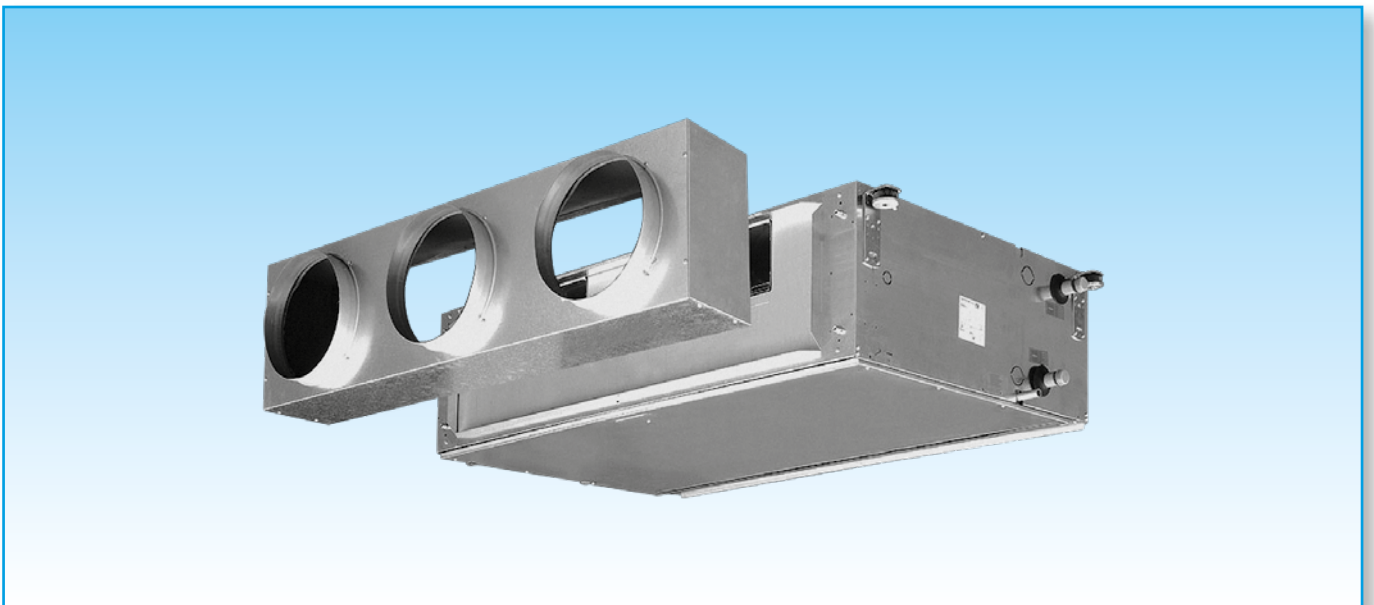

# Maestro MTL 6÷7 | Main performance and technical characteristics



**2 pipe units.** The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
Water temperature + 60°C E.W.T. + 50°C L.W.T.

## MTL UNITS WITH 4 AND 6 ROW COIL

AVAILABLE PRESSURE: 0 Pa

| MODEL                     |       | MTL 64 |       |       | MTL 66 |       |       | MTL 74 |       |       | MTL 76 |       |       |
|---------------------------|-------|--------|-------|-------|--------|-------|-------|--------|-------|-------|--------|-------|-------|
|                           |       | 1      | 2     | 3     | 1      | 2     | 3     | 1      | 2     | 3     | 1      | 2     | 3     |
| Speed                     |       |        |       |       |        |       |       |        |       |       |        |       |       |
| Air flow                  | m³/h  | 2200   | 3580  | 5200  | 2190   | 3570  | 5170  | 3960   | 5210  | 7480  | 3960   | 5210  | 7435  |
| Cooling total emission    | kW    | 13,83  | 19,28 | 23,94 | 16,28  | 23,47 | 29,89 | 21,45  | 25,55 | 31,22 | 26,09  | 31,62 | 39,52 |
| Cooling sensible emission | kW    | 9,99   | 14,64 | 18,98 | 11,25  | 16,90 | 22,32 | 16,04  | 19,66 | 25,14 | 18,44  | 23,02 | 29,94 |
| Heating                   | kW    | 23,77  | 35,01 | 46,21 | 26,09  | 39,57 | 53,27 | 39,61  | 48,83 | 63,38 | 44,57  | 55,84 | 73,68 |
| Dp Cooling                | kPa   | 9,0    | 16,4  | 24,6  | 11,6   | 22,2  | 34,8  | 14,6   | 19,8  | 29,1  | 18,6   | 26,1  | 39,5  |
| Dp Heating                | kPa   | 4,9    | 9,9   | 16,3  | 5,7    | 12,1  | 20,6  | 8,6    | 12,5  | 20,0  | 9,9    | 14,8  | 24,4  |
| Fan                       | W     | 732    | 943   | 1437  | 715    | 933   | 1414  | 1666   | 1879  | 2803  | 1666   | 1879  | 2764  |
| Sound power Lw            | dB(A) | 61     | 69    | 76    | 61     | 69    | 76    | 68     | 74    | 81    | 68     | 74    | 81    |
| Sound pressure (*)        | dB(A) | 52     | 60    | 67    | 52     | 60    | 67    | 59     | 65    | 72    | 59     | 65    | 72    |

AVAILABLE PRESSURE: 150 Pa

| MODEL                     |       | MTL 64 |       |       | MTL 66 |       |       | MTL 74 |       |       | MTL 76 |       |       |
|---------------------------|-------|--------|-------|-------|--------|-------|-------|--------|-------|-------|--------|-------|-------|
|                           |       | 1      | 2     | 3     | 1      | 2     | 3     | 1      | 2     | 3     | 1      | 2     | 3     |
| Speed                     |       |        |       |       |        |       |       |        |       |       |        |       |       |
| Air flow                  | m³/h  | 1880   | 3385  | 4800  | 1860   | 3350  | 4740  | 3925   | 5070  | 7100  | 3920   | 5050  | 7030  |
| Cooling total emission    | kW    | 12,42  | 18,73 | 22,89 | 14,36  | 22,59 | 28,28 | 21,54  | 25,33 | 30,63 | 26,09  | 31,17 | 38,42 |
| Cooling sensible emission | kW    | 8,88   | 14,16 | 17,98 | 9,84   | 16,20 | 20,91 | 16,05  | 19,46 | 24,53 | 18,49  | 22,66 | 28,96 |
| Heating                   | kW    | 20,86  | 33,52 | 43,60 | 22,58  | 37,53 | 49,77 | 39,34  | 47,85 | 61,14 | 44,20  | 54,45 | 70,64 |
| Dp Cooling                | kPa   | 7,4    | 15,3  | 22,6  | 9,2    | 20,5  | 31,4  | 14,4   | 19,3  | 27,6  | 18,3   | 25,1  | 37,1  |
| Dp Heating                | kPa   | 3,9    | 9,1   | 14,7  | 4,4    | 11,0  | 18,2  | 8,5    | 12,1  | 18,8  | 9,7    | 14,2  | 22,6  |
| Fan                       | W     | 570    | 788   | 1191  | 565    | 771   | 1163  | 1610   | 1738  | 2502  | 1605   | 1720  | 2452  |
| Sound power Lw            | dB(A) | 63     | 71    | 77    | 63     | 71    | 77    | 71     | 75    | 81    | 71     | 75    | 81    |
| Sound pressure (*)        | dB(A) | 54     | 62    | 68    | 54     | 62    | 68    | 62     | 66    | 72    | 62     | 66    | 72    |

**4 pipe units.** The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
Water temperature + 70°C E.W.T. + 60°C L.W.T.

## MTL UNITS WITH 4+2 AND 6+2 ROW COIL

AVAILABLE PRESSURE: 0 Pa

| MODEL                     |       | MTL 64+2 |       |       | MTL 66+2 |       |       | MTL 74+2 |       |       | MTL 76+2 |       |       |
|---------------------------|-------|----------|-------|-------|----------|-------|-------|----------|-------|-------|----------|-------|-------|
|                           |       | 1        | 2     | 3     | 1        | 2     | 3     | 1        | 2     | 3     | 1        | 2     | 3     |
| Speed                     |       |          |       |       |          |       |       |          |       |       |          |       |       |
| Air flow                  | m³/h  | 2190     | 3570  | 5150  | 2180     | 3570  | 5125  | 3960     | 5210  | 7410  | 3960     | 5210  | 7355  |
| Cooling total emission    | kW    | 13,80    | 19,24 | 23,81 | 16,21    | 23,47 | 29,75 | 21,45    | 25,55 | 31,16 | 26,09    | 31,62 | 39,28 |
| Cooling sensible emission | kW    | 9,97     | 14,61 | 18,87 | 11,20    | 16,90 | 22,20 | 15,95    | 19,66 | 25,06 | 18,44    | 23,02 | 29,73 |
| Heating                   | kW    | 22,28    | 31,16 | 39,42 | 22,21    | 31,16 | 39,27 | 35,74    | 42,78 | 53,25 | 35,74    | 42,78 | 52,98 |
| Dp Cooling                | kPa   | 9,0      | 16,3  | 24,3  | 11,5     | 22,2  | 34,4  | 14,6     | 19,8  | 28,9  | 18,6     | 26,1  | 38,9  |
| Dp Heating                | kPa   | 14,7     | 27,0  | 41,2  | 14,7     | 27,0  | 40,9  | 24,1     | 33,3  | 49,3  | 24,1     | 33,3  | 48,9  |
| Fan                       | W     | 715      | 933   | 1400  | 708      | 933   | 1382  | 1666     | 1879  | 2743  | 1666     | 1879  | 2698  |
| Sound power Lw            | dB(A) | 61       | 69    | 76    | 61       | 69    | 76    | 68       | 74    | 81    | 68       | 74    | 81    |
| Sound pressure (*)        | dB(A) | 52       | 60    | 67    | 52       | 60    | 67    | 59       | 65    | 72    | 59       | 65    | 72    |

AVAILABLE PRESSURE: 150 Pa

| MODEL                     |       | MTL 64+2 |       |       | MTL 66+2 |       |       | MTL 74+2 |       |       | MTL 76+2 |       |       |
|---------------------------|-------|----------|-------|-------|----------|-------|-------|----------|-------|-------|----------|-------|-------|
|                           |       | 1        | 2     | 3     | 1        | 2     | 3     | 1        | 2     | 3     | 1        | 2     | 3     |
| Speed                     |       |          |       |       |          |       |       |          |       |       |          |       |       |
| Air flow                  | m³/h  | 1860     | 3330  | 4680  | 1850     | 3300  | 4600  | 3920     | 5040  | 6980  | 3910     | 5000  | 6900  |
| Cooling total emission    | kW    | 12,33    | 18,56 | 22,52 | 14,10    | 22,04 | 27,53 | 21,53    | 25,25 | 30,36 | 26,08    | 30,98 | 38,04 |
| Cooling sensible emission | kW    | 8,81     | 14,02 | 17,62 | 9,59     | 15,70 | 20,26 | 16,05    | 19,39 | 24,28 | 18,48    | 22,51 | 28,62 |
| Heating                   | kW    | 19,81    | 29,78 | 37,13 | 19,73    | 29,59 | 36,76 | 35,50    | 41,88 | 51,31 | 35,41    | 41,68 | 50,95 |
| Dp Cooling                | kPa   | 7,3      | 15,0  | 22,0  | 9,1      | 20,1  | 30,3  | 14,4     | 19,1  | 27,1  | 18,3     | 24,8  | 36,3  |
| Dp Heating                | kPa   | 11,9     | 24,9  | 37,0  | 11,8     | 24,6  | 36,3  | 23,8     | 32,0  | 46,1  | 23,7     | 31,7  | 45,5  |
| Fan                       | W     | 565      | 762   | 1137  | 560      | 749   | 1105  | 1605     | 1710  | 2417  | 1587     | 1677  | 2364  |
| Sound power Lw            | dB(A) | 63       | 71    | 77    | 63       | 71    | 77    | 71       | 75    | 81    | 71       | 75    | 81    |
| Sound pressure (*)        | dB(A) | 54       | 62    | 68    | 54       | 62    | 68    | 62       | 66    | 72    | 62       | 66    | 72    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

## Cooling emission of 4 row coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 64</b> | 3     | MAX | 5200        | 27,34 | 20,66 | 4702 | 28,1        | 24,47 | 19,80 | 4208 | 22,9         | 19,14 | 18,22 | 3292 | 14,6         | 14,66 | 14,66 | 2521 | 9,0   |
|               | 2     | MED | 3580        | 21,84 | 15,72 | 3757 | 18,8        | 19,51 | 14,93 | 3355 | 15,3         | 15,15 | 13,49 | 2605 | 9,6          | 11,43 | 11,43 | 1966 | 5,7   |
|               | 1     | MIN | 2200        | 15,74 | 10,80 | 2707 | 10,4        | 14,06 | 10,16 | 2418 | 8,5          | 10,86 | 9,00  | 1868 | 5,3          | 8,07  | 8,04  | 1387 | 3,1   |
| <b>MTL 74</b> | 3     | MAX | 7480        | 36,63 | 28,38 | 6300 | 33,2        | 32,78 | 27,28 | 5638 | 27,1         | 25,78 | 25,34 | 4434 | 17,4         | 19,87 | 19,87 | 3418 | 10,8  |
|               | 2     | MED | 5210        | 29,70 | 21,85 | 5108 | 22,8        | 26,55 | 20,83 | 4566 | 18,5         | 20,71 | 19,00 | 3561 | 11,7         | 15,70 | 15,70 | 2700 | 7,1   |
|               | 1     | MIN | 3960        | 25,08 | 17,85 | 4314 | 16,8        | 22,39 | 16,90 | 3852 | 13,6         | 17,34 | 15,20 | 2982 | 8,5          | 13,05 | 13,05 | 2244 | 5,1   |

## Cooling emission of 4 row coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 64</b> | 3     | MAX | 5200        | 24,32 | 19,77 | 4183 | 22,8        | 21,66 | 18,95 | 3725 | 18,4         | 16,79 | 16,79 | 2887 | 11,5         | 12,78 | 12,78 | 2197 | 7,0   |
|               | 2     | MED | 3580        | 19,42 | 14,95 | 3339 | 15,2        | 17,20 | 14,18 | 2959 | 12,2         | 13,19 | 12,83 | 2269 | 7,5          | 9,88  | 9,88  | 1700 | 4,4   |
|               | 1     | MIN | 2200        | 13,97 | 10,19 | 2403 | 8,4         | 12,36 | 9,57  | 2126 | 6,7          | 9,39  | 8,49  | 1616 | 4,1          | 6,91  | 6,91  | 1189 | 2,3   |
| <b>MTL 74</b> | 3     | MAX | 7480        | 32,65 | 27,26 | 5616 | 27,0        | 29,10 | 26,22 | 5005 | 21,8         | 22,71 | 22,71 | 3906 | 13,8         | 17,39 | 17,39 | 2991 | 8,5   |
|               | 2     | MED | 5210        | 26,41 | 20,83 | 4542 | 18,4        | 23,47 | 19,87 | 4037 | 14,8         | 18,09 | 18,09 | 3111 | 9,2          | 13,63 | 13,63 | 2344 | 5,5   |
|               | 1     | MIN | 3960        | 22,26 | 16,92 | 3830 | 13,5        | 19,73 | 16,03 | 3394 | 10,9         | 15,10 | 14,44 | 2597 | 6,6          | 11,26 | 11,26 | 1936 | 3,9   |

## Cooling emission of 4 row coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 64</b> | 3     | MAX | 5200        | 21,58 | 18,92 | 3711 | 18,4        | 19,10 | 18,12 | 3285 | 14,7         | 14,70 | 14,70 | 2529 | 9,1          | 12,96 | 12,96 | 2230 | 7,2   |
|               | 2     | MED | 3580        | 17,13 | 14,18 | 2947 | 12,1        | 15,09 | 13,45 | 2595 | 9,6          | 11,48 | 11,48 | 1974 | 5,8          | 9,54  | 9,54  | 1640 | 4,1   |
|               | 1     | MIN | 2200        | 12,30 | 9,59  | 2116 | 6,7         | 10,81 | 9,01  | 1859 | 5,3          | 8,09  | 8,00  | 1392 | 3,1          | 5,99  | 5,99  | 1031 | 1,8   |
| <b>MTL 74</b> | 3     | MAX | 7480        | 29,02 | 26,17 | 4992 | 21,8        | 25,74 | 25,16 | 4427 | 17,5         | 19,95 | 19,95 | 3431 | 11,0         | 17,70 | 17,70 | 3044 | 8,8   |
|               | 2     | MED | 5210        | 23,37 | 19,84 | 4020 | 14,8        | 20,63 | 18,92 | 3549 | 11,8         | 15,76 | 15,76 | 2711 | 7,2          | 13,75 | 13,75 | 2365 | 5,6   |
|               | 1     | MIN | 3960        | 19,63 | 16,02 | 3376 | 10,8        | 17,29 | 15,18 | 2974 | 8,6          | 13,09 | 13,09 | 2252 | 5,1          | 10,61 | 10,61 | 1824 | 3,5   |

Note: the power absorption (Watt) at page 30 must be subtracted from the total and sensible cooling emission.

### LEGENDA

- WT = Water temperature      Speed = Fan speed
- Pc = Cooling total emission      MAX = High speed
- Ps = Cooling sensible emission      MED = Medium speed
- Qw = Water flow      MIN = Low speed
- Dp(c) = Water pressure drop      Qv = Air flow



### Cooling emission of 6 row coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 66</b> | 3     | MAX | 5170        | 33,72 | 23,82 | 5799 | 39,7        | 30,21 | 22,56 | 5196 | 32,5         | 23,54 | 20,26 | 4049 | 20,5         | 17,76 | 17,76 | 3055 | 12,2  |
|               | 2     | MED | 3570        | 26,33 | 17,92 | 4529 | 25,5        | 23,62 | 16,87 | 4063 | 20,8         | 18,35 | 14,93 | 3157 | 13,1         | 13,68 | 13,29 | 2354 | 7,7   |
|               | 1     | MIN | 2190        | 18,29 | 12,03 | 3146 | 13,2        | 16,47 | 11,28 | 2833 | 10,9         | 12,82 | 9,84  | 2204 | 6,9          | 9,47  | 8,60  | 1628 | 3,9   |
| <b>MTL 76</b> | 3     | MAX | 7435        | 45,41 | 32,78 | 7811 | 44,9        | 40,68 | 31,16 | 6998 | 36,7         | 31,79 | 28,21 | 5468 | 23,3         | 24,13 | 24,13 | 4151 | 14,1  |
|               | 2     | MED | 5210        | 36,21 | 25,10 | 6228 | 29,9        | 32,43 | 23,68 | 5579 | 24,4         | 25,24 | 21,11 | 4341 | 15,4         | 18,91 | 18,91 | 3252 | 9,1   |
|               | 1     | MIN | 3960        | 29,97 | 20,26 | 5156 | 21,3        | 26,89 | 19,05 | 4625 | 17,4         | 20,88 | 16,79 | 3591 | 10,9         | 15,53 | 14,90 | 2672 | 6,4   |

### Cooling emission of 6 row coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 66</b> | 3     | MAX | 5170        | 30,04 | 22,60 | 5167 | 32,3        | 26,67 | 21,37 | 4587 | 25,9         | 20,53 | 19,22 | 3530 | 16,0         | 15,34 | 15,34 | 2639 | 9,4   |
|               | 2     | MED | 3570        | 23,47 | 16,92 | 4037 | 20,7        | 20,84 | 15,90 | 3585 | 16,6         | 15,92 | 14,06 | 2739 | 10,2         | 11,74 | 11,74 | 2019 | 5,8   |
|               | 1     | MIN | 2190        | 16,35 | 11,32 | 2812 | 10,8        | 14,55 | 10,57 | 2503 | 8,7          | 11,07 | 9,20  | 1905 | 5,3          | 8,06  | 8,06  | 1386 | 3,0   |
| <b>MTL 76</b> | 3     | MAX | 7435        | 40,52 | 31,21 | 6969 | 36,6        | 36,00 | 29,63 | 6192 | 29,4         | 27,82 | 26,86 | 4785 | 18,3         | 20,93 | 20,93 | 3601 | 10,9  |
|               | 2     | MED | 5210        | 32,24 | 23,74 | 5545 | 24,2        | 28,64 | 22,38 | 4926 | 19,5         | 21,91 | 19,94 | 3769 | 11,9         | 16,28 | 16,28 | 2800 | 6,9   |
|               | 1     | MIN | 3960        | 26,70 | 19,10 | 4592 | 17,3        | 23,71 | 17,92 | 4077 | 13,9         | 18,09 | 15,80 | 3112 | 8,4          | 13,30 | 13,30 | 2287 | 4,8   |

### Cooling emission of 6 row coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 7/12 °C |       |       |      | WT: 8/13 °C |       |       |      | WT: 10/15 °C |       |       |      | WT: 12/17 °C |       |       |      |       |
|---------------|-------|-----|-------------|-------|-------|------|-------------|-------|-------|------|--------------|-------|-------|------|--------------|-------|-------|------|-------|
|               |       |     | Qv          | Pc    | Ps    | Qw   | Dp(c)       | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c)        | Pc    | Ps    | Qw   | Dp(c) |
|               |       |     | m³/h        | kW    | kW    | l/h  | kPa         | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa          | kW    | kW    | l/h  | kPa   |
| <b>MTL 66</b> | 3     | MAX | 5170        | 26,56 | 21,38 | 4568 | 25,9        | 23,44 | 20,24 | 4032 | 20,6         | 17,82 | 17,82 | 3065 | 12,4         | 13,35 | 13,35 | 2296 | 7,3   |
|               | 2     | MED | 3570        | 20,73 | 15,93 | 3566 | 16,6        | 18,25 | 14,95 | 3139 | 13,1         | 13,74 | 13,25 | 2363 | 7,8          | 10,05 | 10,05 | 1729 | 4,4   |
|               | 1     | MIN | 2190        | 14,47 | 10,61 | 2489 | 8,7         | 12,74 | 9,89  | 2192 | 6,9          | 9,51  | 8,61  | 1636 | 4,0          | 6,85  | 6,85  | 1179 | 2,2   |
| <b>MTL 76</b> | 3     | MAX | 7435        | 35,88 | 29,64 | 6172 | 29,4        | 31,72 | 28,16 | 5455 | 23,4         | 24,23 | 24,23 | 4168 | 14,3         | 19,15 | 19,15 | 3294 | 9,3   |
|               | 2     | MED | 5210        | 28,52 | 22,41 | 4905 | 19,4        | 25,12 | 21,11 | 4320 | 15,4         | 19,00 | 18,86 | 3267 | 9,2          | 13,99 | 13,99 | 2406 | 5,3   |
|               | 1     | MIN | 3960        | 23,61 | 17,97 | 4061 | 13,8        | 20,77 | 16,84 | 3573 | 10,9         | 15,60 | 14,87 | 2684 | 6,5          | 11,38 | 11,38 | 1957 | 3,6   |

Note: the power absorption (Watt) at page 30 must be subtracted from the total and sensible cooling emission.

**LEGENDA**

- WT = Water temperature
- Pc = Cooling total emission
- Ps = Cooling sensible emission
- Qw = Water flow
- Dp(c) = Water pressure drop
- Speed = Fan speed
- MAX = High speed
- MED = Medium speed
- MIN = Low speed
- Qv = Air flow

**Heating emission of 4 row coil**

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 60/50 °C      |       |      |       | WT: 55/45 °C |      |       | WT: 50/40 °C |      |       | WT: 50/45 °C |      |       | WT: 45/40 °C |      |       |
|---------------|-------|-----|-------------------|-------|------|-------|--------------|------|-------|--------------|------|-------|--------------|------|-------|--------------|------|-------|
|               |       |     | Qv                | Ph    | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) |
|               |       |     | m <sup>3</sup> /h | kW    | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   |
| <b>MTL 64</b> | 3     | MAX | 5200              | 46,21 | 3974 | 16,3  | 39,30        | 3380 | 12,4  | 32,35        | 2782 | 8,9   | 36,45        | 6269 | 38,0  | 29,65        | 5100 | 26,7  |
|               | 2     | MED | 3580              | 35,01 | 3011 | 9,9   | 29,85        | 2567 | 7,5   | 24,67        | 2122 | 5,5   | 27,45        | 4722 | 22,8  | 22,38        | 3849 | 16,1  |
|               | 1     | MIN | 2200              | 23,77 | 2044 | 4,9   | 20,35        | 1750 | 3,8   | 16,91        | 1455 | 2,8   | 18,51        | 3183 | 11,2  | 15,14        | 2605 | 8,0   |
| <b>MTL 74</b> | 3     | MAX | 7480              | 63,38 | 5450 | 20,0  | 53,87        | 4632 | 15,2  | 44,26        | 3806 | 10,9  | 50,07        | 8613 | 46,9  | 40,68        | 6998 | 32,9  |
|               | 2     | MED | 5210              | 48,83 | 4199 | 12,5  | 41,59        | 3577 | 9,6   | 34,31        | 2951 | 6,9   | 38,39        | 6603 | 29,1  | 31,29        | 5381 | 20,5  |
|               | 1     | MIN | 3960              | 39,61 | 3406 | 8,6   | 33,82        | 2908 | 6,6   | 27,99        | 2407 | 4,8   | 31,03        | 5337 | 19,8  | 25,31        | 4353 | 14,0  |

**Heating emission of 6 row coil**

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.          | Speed |     | WT: 55/45 °C      |       |      |       | WT: 50/40 °C |      |       | WT: 50/45 °C |      |       | WT: 45/40 °C |      |       |
|---------------|-------|-----|-------------------|-------|------|-------|--------------|------|-------|--------------|------|-------|--------------|------|-------|
|               |       |     | Qv                | Ph    | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) |
|               |       |     | m <sup>3</sup> /h | kW    | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   |
| <b>MTL 66</b> | 3     | MAX | 5170              | 45,60 | 3922 | 15,9  | 37,92        | 3261 | 11,6  | 41,53        | 7143 | 47,1  | 33,97        | 5843 | 33,4  |
|               | 2     | MED | 3570              | 33,99 | 2923 | 9,3   | 28,36        | 2439 | 6,9   | 30,66        | 5274 | 27,3  | 25,16        | 4327 | 19,5  |
|               | 1     | MIN | 2190              | 22,49 | 1934 | 4,4   | 18,86        | 1622 | 3,3   | 20,07        | 3452 | 12,7  | 16,53        | 2843 | 9,1   |
| <b>MTL 76</b> | 3     | MAX | 7435              | 63,02 | 5420 | 18,7  | 52,30        | 4498 | 13,6  | 57,60        | 9908 | 56,0  | 47,09        | 8099 | 39,7  |
|               | 2     | MED | 5210              | 47,87 | 4117 | 11,4  | 39,85        | 3427 | 8,4   | 43,42        | 7468 | 33,7  | 35,56        | 6117 | 24,0  |
|               | 1     | MIN | 3960              | 38,30 | 3293 | 7,6   | 31,99        | 2751 | 5,6   | 34,50        | 5934 | 22,3  | 28,33        | 4873 | 15,9  |

**Heating emission of 2 row additional coil**

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa


| Mod.             | Speed |     | WT: 65/55 °C      |       |      |       | WT: 60/50 °C |      |       | WT: 55/45 °C |      |       | WT: 50/40 °C |      |       |
|------------------|-------|-----|-------------------|-------|------|-------|--------------|------|-------|--------------|------|-------|--------------|------|-------|
|                  |       |     | Qv                | Ph    | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) |
|                  |       |     | m <sup>3</sup> /h | kW    | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   |
| <b>MTL 6..+2</b> | 3     | MAX | 5125              | 34,75 | 2989 | 33,4  | 30,15        | 2593 | 26,3  | 25,49        | 2192 | 19,8  | 20,84        | 1792 | 14,0  |
|                  | 2     | MED | 3570              | 27,55 | 2369 | 22,0  | 23,90        | 2055 | 17,3  | 20,26        | 1742 | 13,1  | 16,59        | 1427 | 9,3   |
|                  | 1     | MIN | 2180              | 19,71 | 1695 | 12,0  | 17,13        | 1473 | 9,5   | 14,56        | 1252 | 7,2   | 11,98        | 1030 | 5,2   |
| <b>MTL 7..+2</b> | 3     | MAX | 7355              | 46,94 | 4037 | 40,0  | 40,66        | 3496 | 31,4  | 34,38        | 2957 | 23,6  | 28,05        | 2412 | 16,7  |
|                  | 2     | MED | 5210              | 37,78 | 3249 | 27,0  | 32,76        | 2817 | 21,3  | 27,74        | 2385 | 16,0  | 22,70        | 1952 | 11,4  |
|                  | 1     | MIN | 3960              | 31,58 | 2716 | 19,6  | 27,39        | 2356 | 15,4  | 23,24        | 1999 | 11,7  | 19,06        | 1639 | 8,3   |

| Mod.             | Speed |     | WT: 50/45 °C      |       |      |       | WT: 45/40 °C |      |       | WT: 45/35 °C |      |       |
|------------------|-------|-----|-------------------|-------|------|-------|--------------|------|-------|--------------|------|-------|
|                  |       |     | Qv                | Ph    | Qw   | Dp(c) | Ph           | Qw   | Dp(c) | Ph           | Qw   | Dp(c) |
|                  |       |     | m <sup>3</sup> /h | kW    | l/h  | kPa   | kW           | l/h  | kPa   | kW           | l/h  | kPa   |
| <b>MTL 6..+2</b> | 3     | MAX | 5125              | 24,03 | 4133 | 62,5  | 19,46        | 3346 | 43,6  | 16,16        | 1390 | 9,0   |
|                  | 2     | MED | 3570              | 19,01 | 3270 | 41,0  | 15,41        | 2650 | 28,6  | 12,92        | 1111 | 6,0   |
|                  | 1     | MIN | 2180              | 13,56 | 2332 | 22,3  | 11,01        | 1894 | 15,6  | 9,37         | 806  | 3,4   |
| <b>MTL 7..+2</b> | 3     | MAX | 7355              | 32,46 | 5583 | 74,9  | 26,26        | 4517 | 52,1  | 21,70        | 1866 | 10,7  |
|                  | 2     | MED | 5210              | 26,11 | 4490 | 50,6  | 21,11        | 3632 | 35,2  | 17,63        | 1516 | 7,4   |
|                  | 1     | MIN | 3960              | 21,77 | 3745 | 36,5  | 17,64        | 3034 | 25,4  | 14,85        | 1277 | 5,4   |


**LEGENDA**

- |                                |                    |
|--------------------------------|--------------------|
| WT = Water temperature         | Speed = Fan speed  |
| Pc = Cooling total emission    | MAX = High speed   |
| Ps = Cooling sensible emission | MED = Medium speed |
| Qw = Water flow                | MIN = Low speed    |
| Dp(c) = Water pressure drop    | Qv = Air flow      |


### Available pressure for Maestro 64 (with 4 row coil)

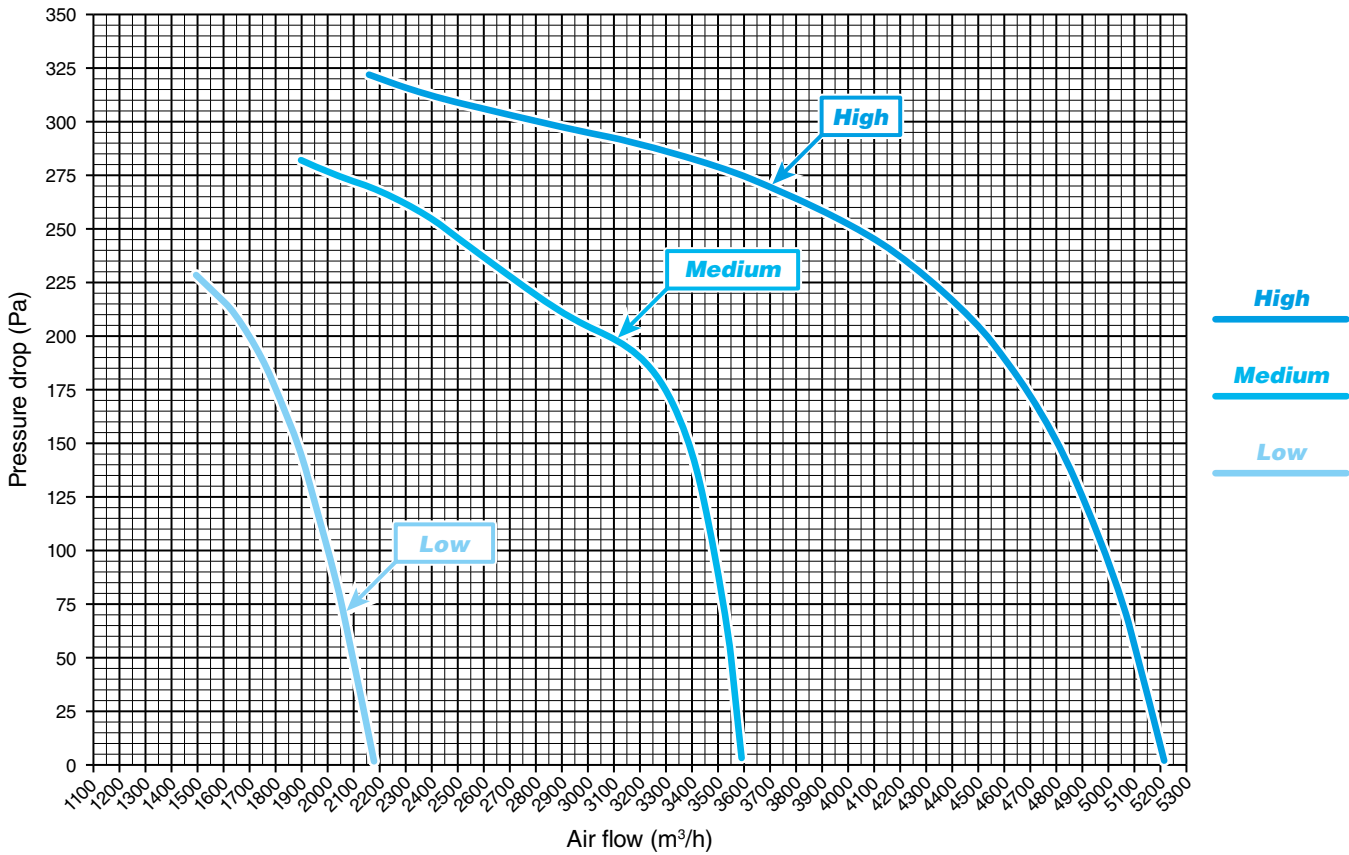


### Pressure drop for Maestro 6 (Dp)

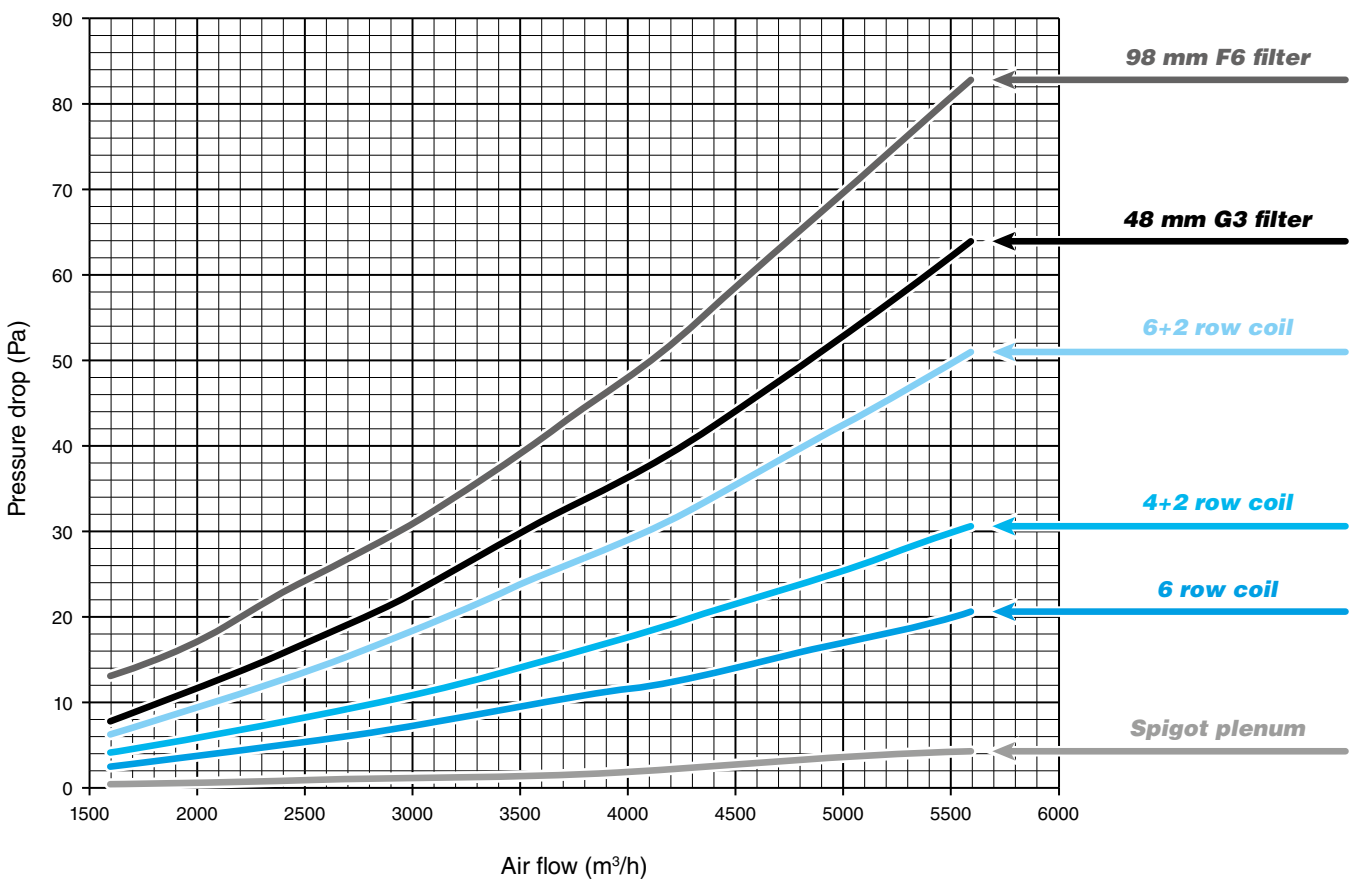

### Available pressure for Maestro 74 (with 4 row coil)

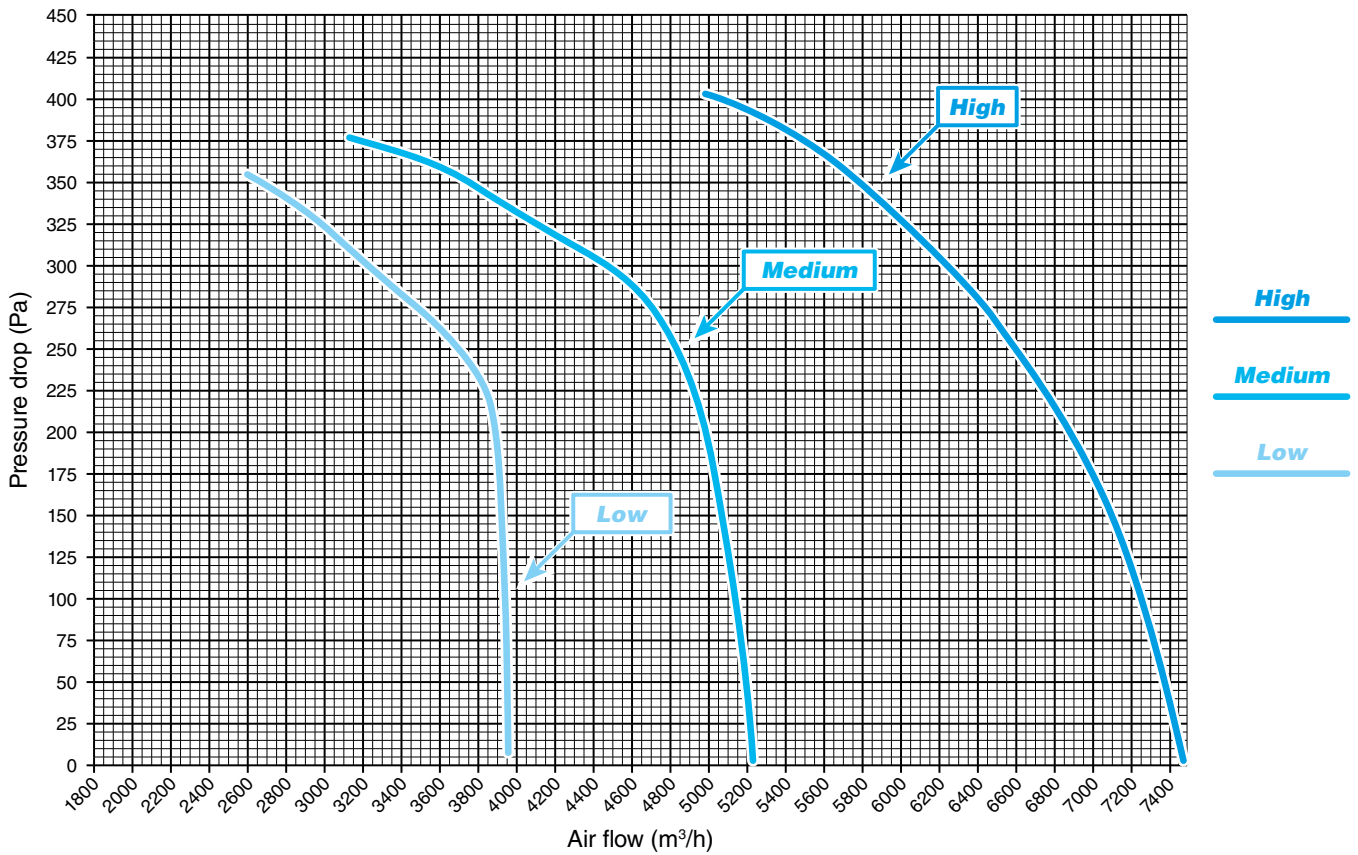

### Pressure drop for Maestro 7 (Dp)

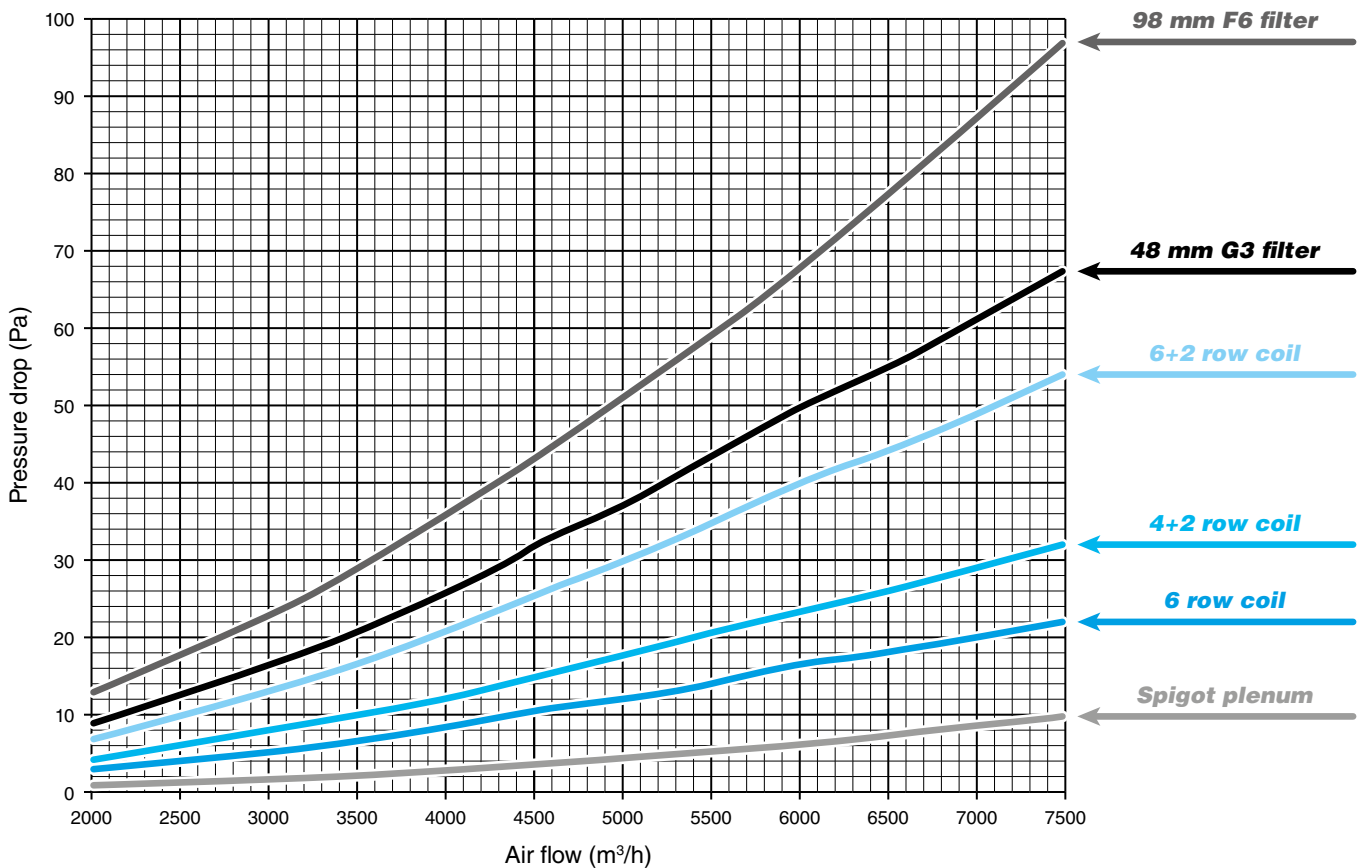

## Example of calculation of the emission at different speeds and air pressure drops

### Model: **Maestro MTL 66+2**

#### Installation characteristics:

##### Summer mode:

Air temperature: + 25°C d.b. U.R. 50%  
 Water temperature: + 8°C E.W.T. + 13°C L.W.T.

##### Winter mode:

Air temperature: + 20°C  
 Water temperature: + 60°C E.W.T. + 50°C L.W.T.

**Air flow richiesta:** 3400 m³/h

**Requested available pressure:** 110 Pa

### Emission of **Maestro 66+2** working

- at medium speed (speed 2)
- with 0 Pa of available pressure
- with entering air temperature: 25°C

- Reference air flow rate: 3570 m³/h (page 24 - MTL 66)
- Total emission: 18250 W (page 24 - MTL 66)
- Sensible emission: 14950 W (page 24 - MTL 66)
- Heating: 23900 W (page 25 - MTL 6..+2)

### Calculation of the emission at requested flow:

Define the “correction factor” between the requested air flow and the reference air flow rate (page 26):

**Correction factor = requested air flow rate/reference air flow rate =  $3400/3570 = 0,95$**

From **Diagrams 1 and 2** define the “variation in % of the emission” using the correction factor calculated above.


- For the **TOTAL emission = 0,97**
- For the **SENSIBLE emission = 0,96**
- For the **Heating = 0,96**

The obtained emission for the unit is:

- **TOTAL emission =  $18250 \times 0,97 = 17703$  W**
- **SENSIBLE emission =  $14950 \times 0,96 = 14352$  W**
- **Heating =  $23900 \times 0,96 = 22944$  W**


Correction diagram of cooling emission depending on air flow

**Diagram 1 - Cooling emissions**

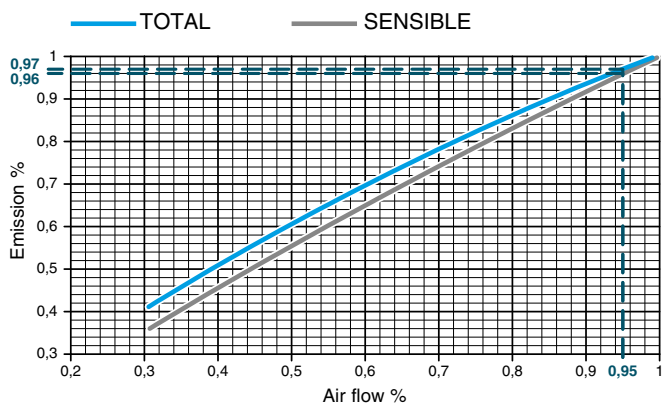

Correction diagram of heating emission depending on air flow

**Diagram 2 - Heating emission**

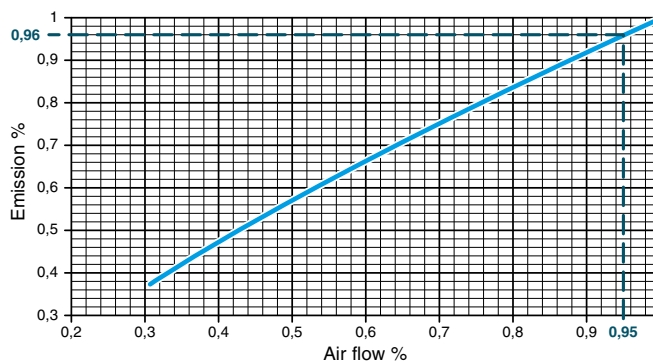

**Calculation of the pressure drop:**

From the **“Pressure drop” Diagram of Maestro MTL 64** with 3400 m<sup>3</sup>/h of air flow, we can find the pressure drop of the unit:

- ΔP air for the coil 6+2 = **22 Pa**
- ΔP air for the spigot plenum = **2 Pa**


The calculation is:

- ΔP total air of Maestro = 22+2 = **24 Pa**

Total pressure drop:

- Spigot pressure drop + Maestro pressure drop = 110 Pa + 24 Pa = **134 Pa**


**Diagram for Maestro MTL 64 “Pressure drop”**

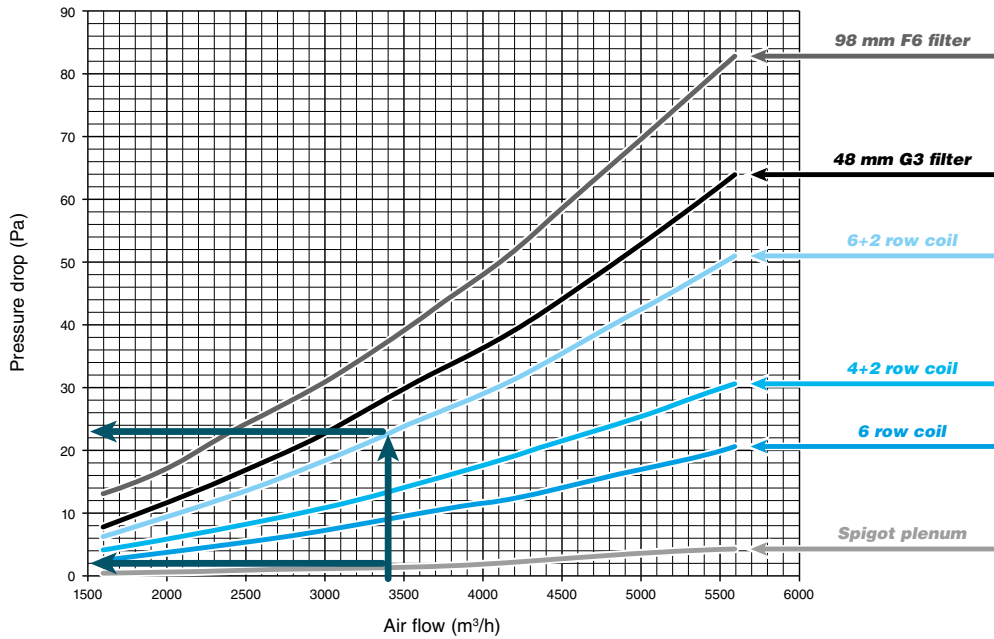

From the **“Available pressure” Diagram of Maestro MTL 64** working at medium speed and with 3400 m<sup>3</sup>/h of air flow, we can find:


- Available pressure = 140 Pa = ~ 134 Pa

**Diagram for Maestro MTL 64 “Available pressure”**

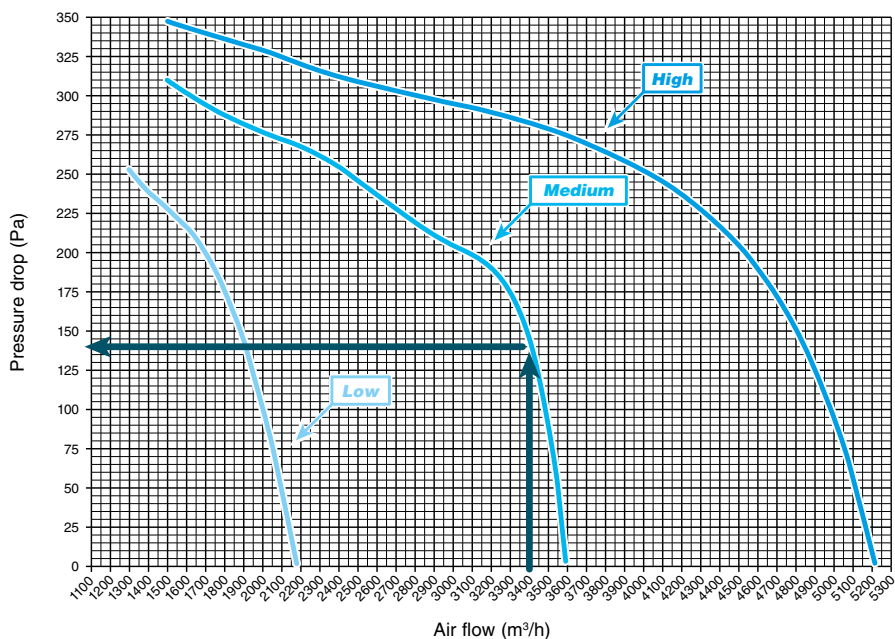



Power absorbed (Watt) depending on the variation of the air flow

MTL 6

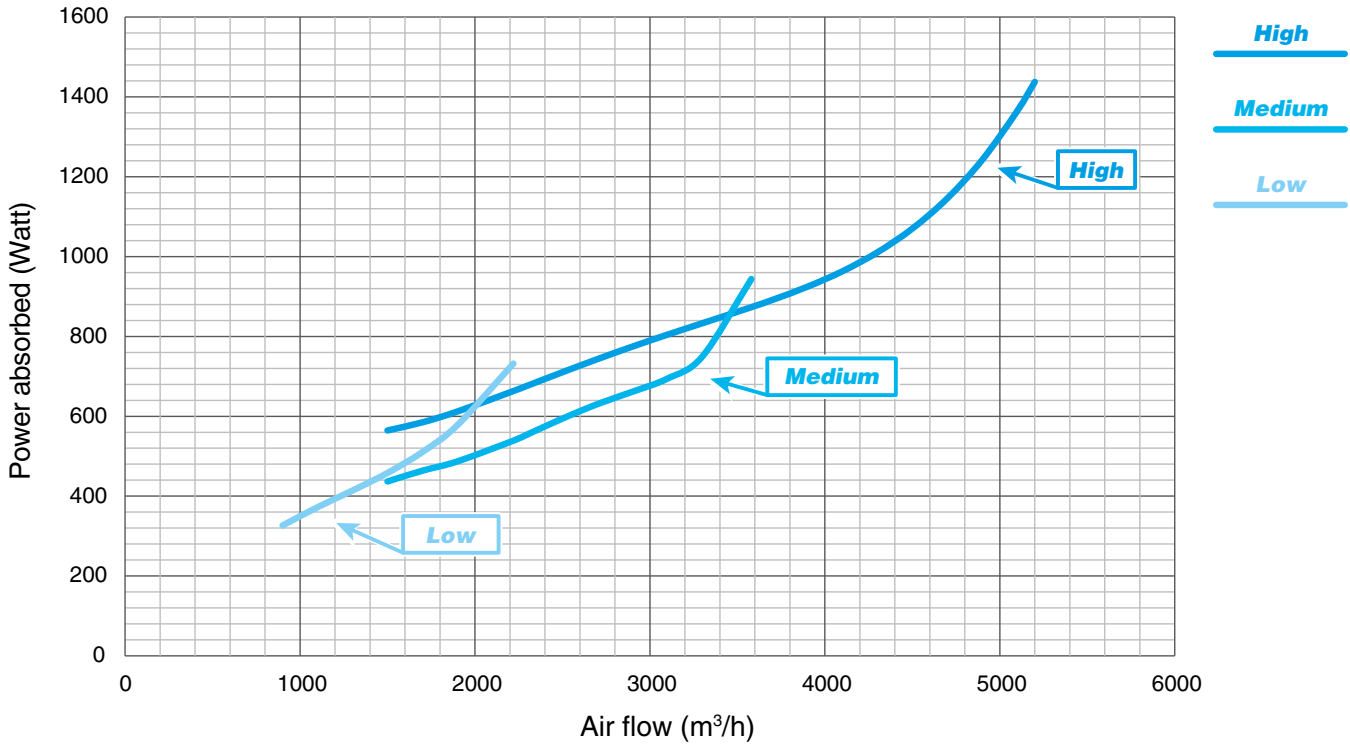


MTL 7

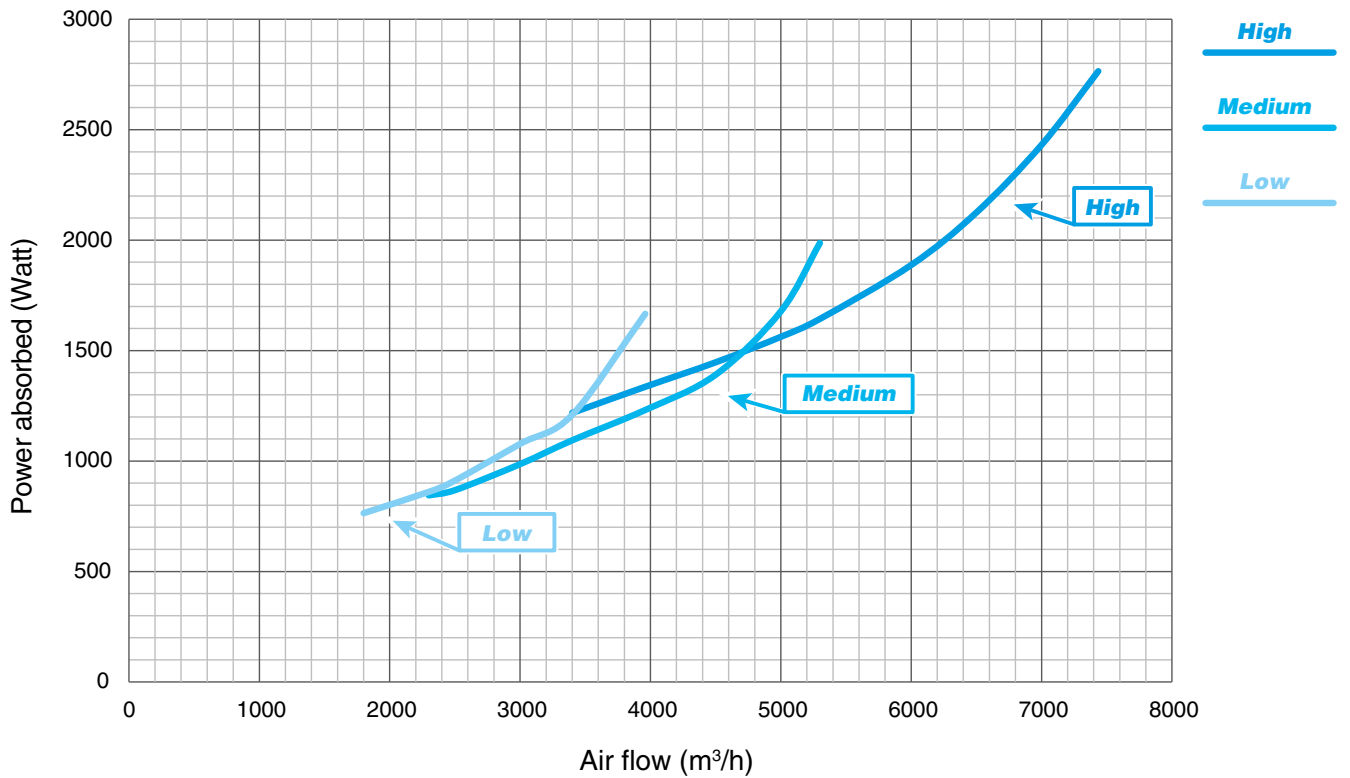

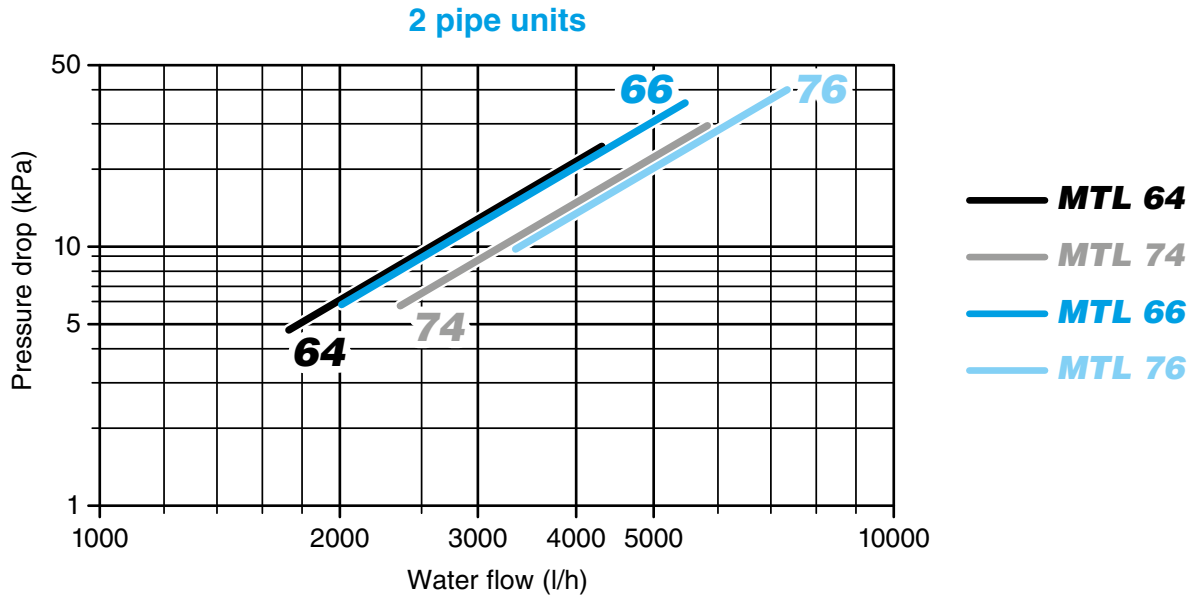

The water pressure drop figures refer to a mean water temperature of **10°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.

| °C       | 20   | 30   | 40   | 50   | 60   | 70   | 80   |
|----------|------|------|------|------|------|------|------|
| <b>K</b> | 0,94 | 0,90 | 0,86 | 0,82 | 0,78 | 0,74 | 0,70 |

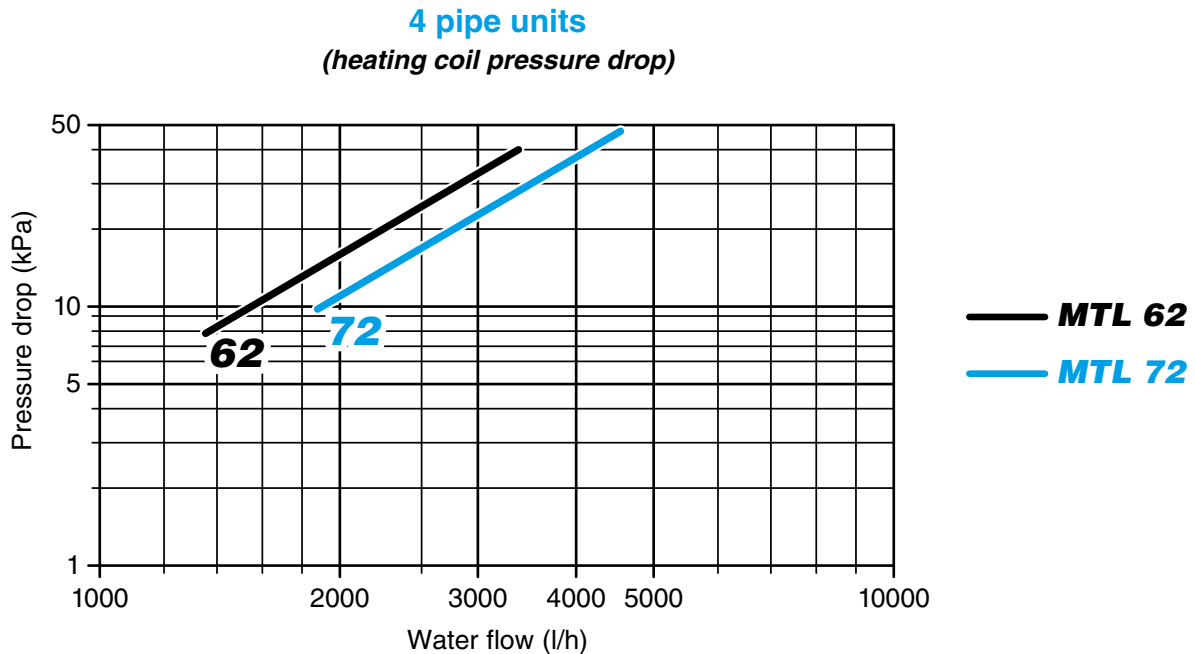

The water pressure drop figures refer to a mean water temperature of **65°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.

| °C       | 40   | 50   | 60   | 70   | 80   |
|----------|------|------|------|------|------|
| <b>K</b> | 1,14 | 1,08 | 1,02 | 0,96 | 0,90 |

| IDENTIFICATION | CODE    |
|----------------|---------|
| WM-3V          | 9066642 |



Dimensions: 75x75x30 mm

**For Models 1-2 use only the WM-3V control code 9066642.**  
**For Models 3-4-5-6 use the WM-3V control code 9066642 + SEL-S code 9079110.**  
**For Model 7 use the WM-3V control code 9066642 + 2 speed switches SEL-S code 9079110.**

- ON-OFF switch and 3 speed switch, without thermostatic control.
- It does not control the valves.

| IDENTIFICATION | CODE    |
|----------------|---------|
| WM-T           | 9066630 |



Dimensions: 135x86x31 mm

**For Models 1-2 use only the WM-T control code 9066630.**  
**For Models 3-4-5-6 use the WM-T control code 9066630 + SEL-S code 9079110.**  
**For Model 7 use the WM-T control code 9066630 + 2 speed switches SEL-S code 9079110.**

- ON-OFF switch and manual 3 speed switch.
- Manual Summer/Winter switch.
- Electronic room thermostat for fan control (ON-OFF).
- Electronic room thermostat for water valve control (ON-OFF).
- It allows to control the low temperature cut-out thermostat (TMM).
- It allows to control the chilled water valve (ON-OFF) and the electric heater (BEM) only in case that hot water is not used in winter.
- Presence of a LED signal when the thermostat is on.

Control power absorption: 0,25 VA.

| IDENTIFICATION | CODE    |
|----------------|---------|
| WM-TQR         | 9066631 |



Dimensions: 135x86x31 mm

**For Models 1-2 use only the WM-TQR control code 9066631.**  
**For Models 3-4-5-6 use the WM-TQR control code 9066631 + SEL-S code 9079110.**  
**For Model 7 use the WM-TQR control code 9066631 + 2 speed switches SEL-S code 9079110.**

- ON-OFF switch and manual 3 speed switch.
- Manual, automatic or centralized Summer/Winter switch.
- Electric heater switch.
- Electronic room thermostat for fan control (ON-OFF).
- Electronic room thermostat for valve control (ON-OFF).
- Simultaneous thermostatic control of the valves and fan.
- It allows to control the low temperature cut-out thermostat (NTC).
- It allows to control the water valves (ON-OFF) and the electric heater managed as main heating element or as an integration element.
- Energy saving function.
- Presence of a LED signal when the thermostat is on.

Control power absorption: 1 VA.

| IDENTIFICATION | CODE    |
|----------------|---------|
| COM            | 9053022 |



- Remote manual speed control.
- Commutator with 4 positions:
  - OFF
  - first speed
  - second speed
  - third speed

| IDENTIFICATION | CODE    |
|----------------|---------|
| WM-AU          | 9066632 |



Dimensions: 135x86x24 mm

The control must always be connected with UPO-AU power unit (to be ordered separately).

- ON-OFF switch.
- Manual, automatic or centralized Summer/Winter switch.
- Manual or automatic 3 speed progressive switch.
- Summer/Winter/Fan/Auto mode switch.
- Electronic room thermostat for fan control (ON-OFF).
- Electronic room thermostat for valve control (ON-OFF).
- Simultaneous thermostatic control of the valves and fan.
- It allows to control the low temperature cut-out thermostat (NTC).
- Energy saving switch.
- Presence of a LED signal when the thermostat is on.

Control power absorption: see the UPO-AU power unit

| IDENTIFICATION | CODE     |
|----------------|----------|
| T-MB           | 9066331E |



Dimensions: 110x72x25 mm

The control must always be connected with UPO-AU power unit (to be ordered separately).

Wall control with display that allows controlling one or more units in Master/Slave mode. The control is equipped with internal sensor to detect the room temperature, which can be defined as a priority compared to the return air sensor on the fan coil.

The T-MB control features the following functions:

- Switch the unit ON and OFF.
- Temperature set.
- Manual, centralized or automatic Summer/Winter switch.
- Set the fan speed (low, medium, high or autofan).
- Set the operation mode (fan only, cooling, heating, auto).
- Possibility of use of the low temperature cut-out thermostat NTC mounted on the UPO-AU power unit.
- Time setting.
- Weekly ON/OFF program.

Control power absorption: see the UPO-AU power unit

| DESCRIPTION                                                                       | IDENTIFICATION | CODE    |
|-----------------------------------------------------------------------------------|----------------|---------|
| Power unit for WM-AU and T-MB remote controls for sizes 1, 2, fitted on the unit. | UPOM1-AU       | 9034170 |
| Power unit for WM-AU and T-MB remote controls for sizes 3÷7, fitted on the unit.  | UPOM3-AU       | 9034180 |



Power unit to be installed on the fan coil (fan coil interface).

- It controls the fan and the valves of the fan coil.
- It is connected to the electric supply.
- It receives the information required from the control.
- Possibility of use of the low temperature cut-out thermostat NTC:
  - T1 function for the return air control.
  - T2 function which controls the summer/winter switch.
  - T3 function as low temperature cut-out thermostat.
- It allows to control up to 10 units (1 master and 9 slaves).
- Max. Network length: 100 meters.
- Max cable length between control and first connected power unit: 20 meters.

Control power absorption: 2,3 VA

| IDENTIFICATION | CODE    |
|----------------|---------|
| SEL-S          | 9079110 |



Speed switch (slave)

- It allows to control up to 8 units with only one centralized wall control (1 speed switch for each unit).
- For controls WM-3V, WM-T and WM-TQR.

## Wall electronic control accessories

### NTC low temperature cut-out thermostat

To be fitted between the coil fins; when connecting the control, the NTC probe cable must be separated from the power supply wires. To be used only with WM-TQR control and the UPO-AU power-unit. It stops the fan when the water temperature is lower than 28°C and it starts the fan when is higher than 33°C.

To use as:

- T1 function for the return air control.
- T2 function which controls the summer/winter switch.
- T3 function as low temperature cut-out thermostat.

| IDENTIFICATION | CODE    |
|----------------|---------|
| NTC            | 3021090 |



### TMM low temperature cut-out thermostat

To be installed in contact with the hot water circuit.

To be used only with WM-T control.

For units working on heating only.

It stops the fan when the water temperature is lower than 30°C and it starts the fan when is higher than 38°C.

| IDENTIFICATION | CODE    |
|----------------|---------|
| TMM            | 9053048 |



### Change-Over CH 15-25

Automatic summer/winter switch

to be installed in contact with the water circuit.

For 2-tube installations only

(not to be used with 2 way valve).

To be used only with WM-TQR control.

| IDENTIFICATION | CODE    |
|----------------|---------|
| CH 15-25       | 9053049 |



Following many years of experience in the field of heating and air conditioning, Sabiana has developed a range of **Maestro MTL-ECM** fan coils for concealed installation and connection to a duct system.

The **MTL-ECM units** supply a consistent air flow with static pressure up to 160 Pa to fit most conditions, with the combination of either 3 or 4 row heating coils and 2 or 4 pipe configurations with additional heating coil.

## Compliant with ERP 2015 Regulation (EU) No. 327/2011

---

### Construction features

---

#### CASING

It is made with 1,0 mm galvanized steel for sizes 1-2-3 and with 1,2 mm galvanized steel for sizes 4, insulated with 10 mm polyolefin (PO) foam (class M1).

#### FAN ASSEMBLY

Consists of quiet centrifugal fans with two impellers directly driven to the motor.

#### ELECTRONIC MOTOR

Three phase permanent magnet brushless electronic motor that is controlled with current reconstructed according to a BLAC sinusoidal wave. The inverter board that controls the motor operation is powered by 230 Volt, single-phase and, with a switching system, it generates a three-phase frequency modulated, wave form power supply. The electric power supply required for the machine is therefore single-phase with voltage of 230V and frequency of 50-60Hz.


#### COIL

It is manufactured from drawn copper tube and the aluminium fins are mechanically bonded onto the tube by an expansion process.

The **Maestro MTL-ECM** range Sabiana is available with the combination of either 3 or 4 row coils with the possibility to add a 1 or 2 row coil (3+1, 4+1, 3+2, 4+2 versions for 4 pipe systems).

**The connections are on the left hand side looking from the air inlet of the unit (see picture and drawing to the next page).** On request the connections can be moved to the other side.

The heat exchanger is not suitable for use in corrosive atmosphere or in environments where aluminium may be subject to corrosion.

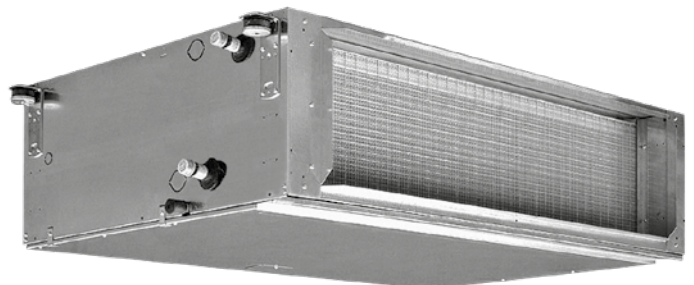

#### FILTER



The filter is made of polypropylene cellular fabric regenerating filter. The filter frame of galvanized steel is inserted into sliding guides fastened to the internal structure for easy insertion and removal of the filter.

#### CONDENSATE COLLECTION TRAY



It is made from galvanized steel insulated with 3 mm polyolefin (PO) foam (class M1).




**Left connections (standard)**

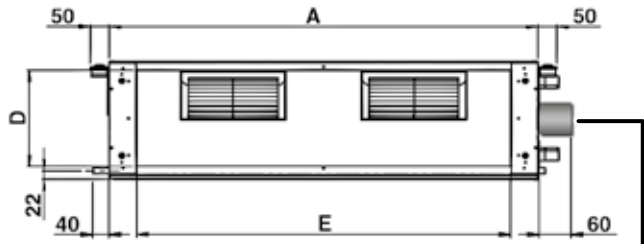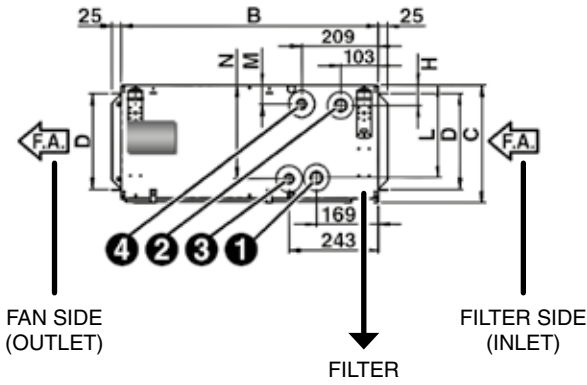

**Right connections (on request)**

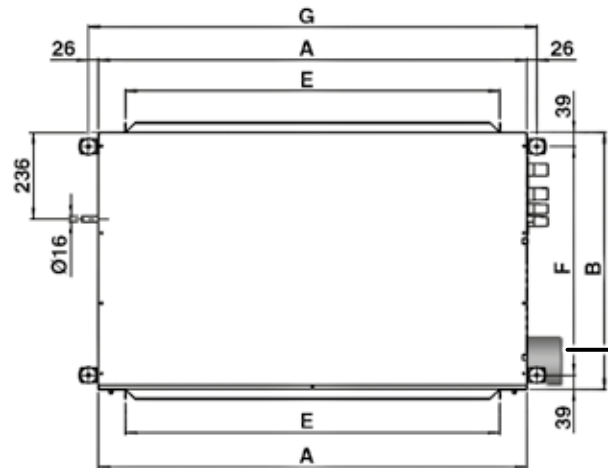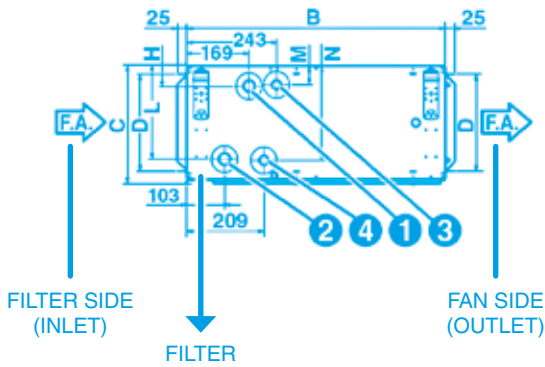

**STANDARD**

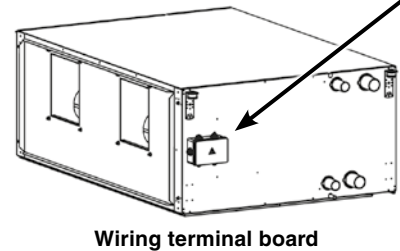



| MODEL        | Dimensions (mm) |     |     |     |      |     |      |    |     |    |     | Coil   |        |            |       |
|--------------|-----------------|-----|-----|-----|------|-----|------|----|-----|----|-----|--------|--------|------------|-------|
|              | A               | B   | C   | D   | E    | F   | G    | H  | L   | M  | N   | Main   |        | Additional |       |
|              |                 |     |     |     |      |     |      |    |     |    |     | ① IN   | ② OUT  | ③ IN       | ④ OUT |
| <b>MTL 1</b> | 1133            | 698 | 310 | 255 | 991  | 620 | 1185 | 54 | 245 | 50 | 249 | 3/4"   | 3/4"   | 3/4"       | 3/4"  |
| <b>MTL 2</b> | 1133            | 698 | 310 | 255 | 991  | 620 | 1185 | 54 | 245 | 50 | 249 | 1"     | 1"     | 3/4"       | 3/4"  |
| <b>MTL 3</b> | 1133            | 698 | 360 | 305 | 991  | 620 | 1185 | 54 | 295 | 50 | 299 | 1"     | 1"     | 3/4"       | 3/4"  |
| <b>MTL 4</b> | 1445            | 853 | 360 | 293 | 1302 | 775 | 1497 | 58 | 291 | 54 | 295 | 1 1/4" | 1 1/4" | 1"         | 1"    |

| MODEL        | Weight without packaging (kg) |      |      |    |      |      | Weight with packaging (kg) |      |      |    |      |      | Water content (l) |     |     |     |
|--------------|-------------------------------|------|------|----|------|------|----------------------------|------|------|----|------|------|-------------------|-----|-----|-----|
|              | 3R                            | 3+1R | 3+2R | 4R | 4+1R | 4+2R | 3R                         | 3+1R | 3+2R | 4R | 4+1R | 4+2R | 3R                | 4R  | 1R  | 2R  |
| <b>MTL 1</b> | 45                            | 48   | 50   | 47 | 50   | 51   | 48                         | 51   | 53   | 50 | 53   | 54   | 2,0               | 2,6 | 0,9 | 1,5 |
| <b>MTL 2</b> | 46                            | 50   | 52   | 48 | 51   | 53   | 49                         | 53   | 55   | 51 | 54   | 56   | 2,9               | 3,7 | 1,1 | 1,8 |
| <b>MTL 3</b> | 54                            | 58   | 60   | 56 | 60   | 62   | 57                         | 61   | 63   | 59 | 63   | 65   | 3,5               | 4,6 | 1,4 | 2,4 |
| <b>MTL 4</b> | 75                            | 80   | 83   | 78 | 83   | 86   | 79                         | 84   | 87   | 82 | 87   | 90   | 4,7               | 6,0 | 2,0 | 3,2 |

|                      |                                            |                                        |
|----------------------|--------------------------------------------|----------------------------------------|
| <b>Water circuit</b> | Maximum water pressure: 1000 kPa (10 bars) | MIN. entering water temperature: +5°C  |
|                      |                                            | MAX. entering water temperature: +80°C |
| <b>Air flow</b>      | Suitable relative humidity 15-75%          | MIN. entering air temperature: +6°C    |
|                      |                                            | MAX. entering air temperature: +40°C   |
|                      |                                            | MAX. leaving air temperature: +50°C    |
| <b>Supply</b>        | Single phase 230V 50/60 Hz                 |                                        |

## Motor electrical data (max. absorption)

| <b>MODEL</b>          |   | <b>MTL-ECM 1</b> | <b>MTL-ECM 2</b> | <b>MTL-ECM 3</b> | <b>MTL-ECM 4</b> |
|-----------------------|---|------------------|------------------|------------------|------------------|
| <b>230/1<br/>50Hz</b> | W | 165              | 355              | 545              | 500              |
|                       | A | 1,15             | 1,60             | 2,40             | 2,25             |

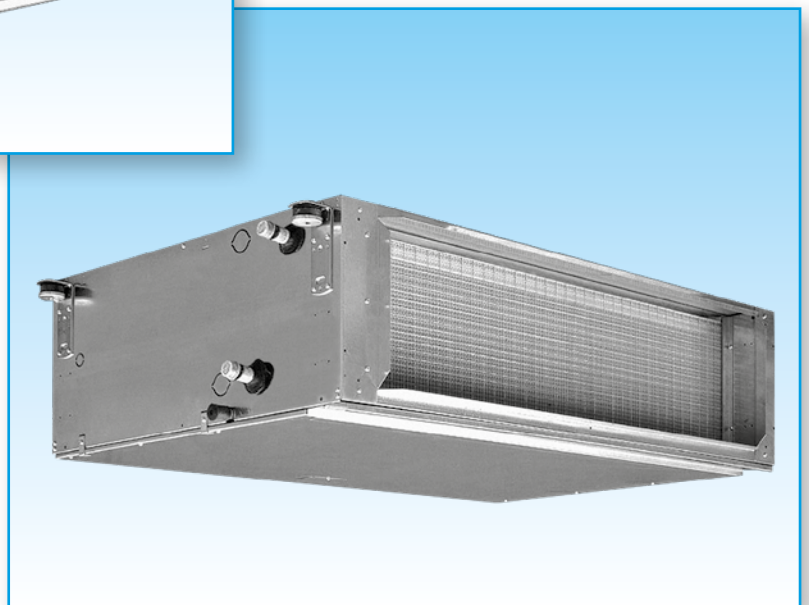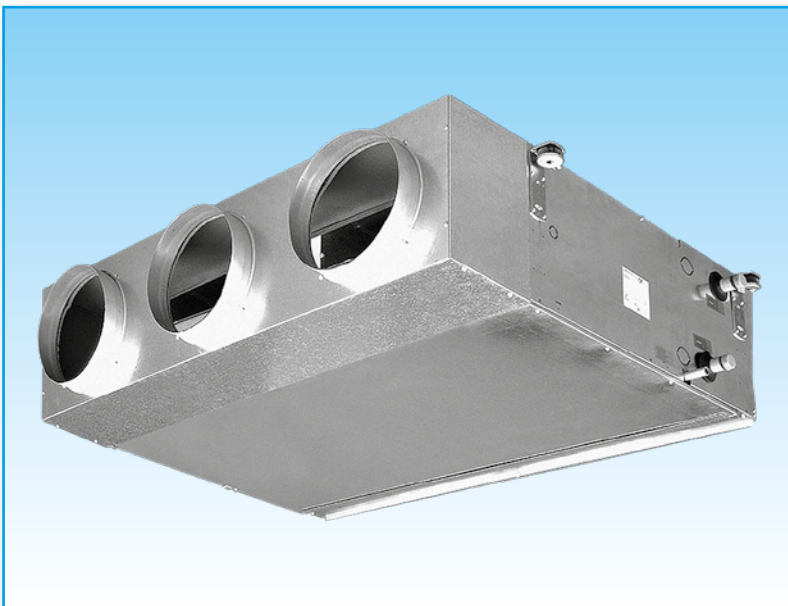

**2 pipe units.**

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
 Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
 Water temperature + 45°C E.W.T. + 40°C L.W.T.

| <b>MODEL</b>                                  |       | <b>MTL-ECM 14</b> |      |      | <b>MTL-ECM 24</b> |      |       | <b>MTL-ECM 34</b> |       |       | <b>MTL-ECM 44</b> |       |       |
|-----------------------------------------------|-------|-------------------|------|------|-------------------|------|-------|-------------------|-------|-------|-------------------|-------|-------|
| Tensione Pilotaggio Inverter (E)              | V     | 4,5               | 7    | 9    | 4                 | 6    | 8     | 4,5               | 6,5   | 8     | 5,5               | 7,5   | 10    |
| Velocità                                      |       | MIN               | MED  | MAX  | MIN               | MED  | MAX   | MIN               | MED   | MAX   | MIN               | MED   | MAX   |
| Air flow (E)                                  | m³/h  | 780               | 1100 | 1310 | 940               | 1360 | 1780  | 1380              | 1950  | 2390  | 1840              | 2440  | 3080  |
| AVAILABLE PRESSURE (E)                        | Pa    | 26                | 50   | 70   | 24                | 50   | 85    | 25                | 50    | 75    | 28                | 50    | 80    |
| Raffreddamento Cooling total emission (E)     | kW    | 4,14              | 5,11 | 5,61 | 5,44              | 6,86 | 7,94  | 7,87              | 9,70  | 10,81 | 10,47             | 12,39 | 13,99 |
| Raffreddamento Cooling sensible emission (E)  | (E)kW | 3,24              | 4,18 | 4,72 | 4,08              | 5,36 | 6,44  | 5,93              | 7,61  | 8,72  | 7,90              | 9,65  | 11,23 |
| Riscaldamento (E)                             | kW    | 5,18              | 6,80 | 7,76 | 6,42              | 8,64 | 10,62 | 8,64              | 11,25 | 13,06 | 12,13             | 15,15 | 18,08 |
| Dp Raffreddamento(E)                          | kPa   | 4,9               | 7,2  | 8,7  | 7,7               | 11,8 | 15,8  | 11,7              | 17,4  | 21,6  | 12,2              | 16,9  | 21,7  |
| Dp Riscaldamento (E)                          | kPa   | 5,3               | 8,7  | 11,1 | 7,5               | 12,9 | 18,8  | 10,1              | 16,4  | 21,4  | 11,6              | 17,4  | 23,9  |
| Assorbimento Motore (E)                       | W     | 40                | 88   | 144  | 44                | 110  | 225   | 80                | 195   | 340   | 110               | 253   | 530   |
| Potenza sonora mandata (E)                    | dB(A) | 45                | 52   | 59   | 45                | 55   | 61    | 52                | 60    | 64    | 55                | 62    | 67    |
| Potenza sonora ripEmission + irraggiata (E)   | dB(A) | 48                | 55   | 61   | 48                | 57   | 63    | 55                | 62    | 66    | 58                | 64    | 69    |
| Pressione sonora mandata (*)                  | dB(A) | 36                | 43   | 50   | 36                | 46   | 52    | 43                | 51    | 55    | 46                | 53    | 58    |
| Pressione sonora ripEmission + irraggiata (*) | dB(A) | 39                | 46   | 52   | 39                | 48   | 54    | 46                | 53    | 57    | 49                | 55    | 60    |
| Code Plenum                                   |       | 9034200           |      |      | 9034200           |      |       | 9034220           |       |       | 9034230           |       |       |

**4 pipe units.**

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
 Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
 Water temperature + 65°C E.W.T. + 55°C L.W.T.

| <b>MODEL</b>                                  |       | <b>MTL-ECM 14+1</b> |      |      | <b>MTL-ECM 24+1</b> |      |      | <b>MTL-ECM 34+1</b> |      |       | <b>MTL-ECM 44+1</b> |       |       |
|-----------------------------------------------|-------|---------------------|------|------|---------------------|------|------|---------------------|------|-------|---------------------|-------|-------|
| Tensione Pilotaggio Inverter (E)              | V     | 4,5                 | 7    | 9    | 4                   | 6    | 8    | 4,5                 | 6,5  | 8     | 5,5                 | 7,5   | 10    |
| Velocità                                      |       | MIN                 | MED  | MAX  | MIN                 | MED  | MAX  | MIN                 | MED  | MAX   | MIN                 | MED   | MAX   |
| Air flow (E)                                  | m³/h  | 750                 | 1040 | 1250 | 920                 | 1340 | 1750 | 1350                | 1920 | 2350  | 1810                | 2400  | 3040  |
| AVAILABLE PRESSURE (E)                        | Pa    | 26                  | 50   | 72   | 24                  | 50   | 85   | 25                  | 50   | 75    | 28                  | 50    | 80    |
| Raffreddamento Cooling total emission (E)     | kW    | 4,04                | 4,94 | 5,46 | 5,36                | 6,79 | 7,87 | 7,76                | 9,59 | 10,70 | 10,36               | 12,27 | 13,90 |
| Raffreddamento Cooling sensible emission (E)  | (E)kW | 3,14                | 4,01 | 4,55 | 4,01                | 5,30 | 6,35 | 5,83                | 7,51 | 8,61  | 7,79                | 9,53  | 11,13 |
| Riscaldamento (E)                             | kW    | 3,43                | 4,18 | 4,62 | 4,33                | 5,42 | 6,25 | 5,90                | 7,20 | 8,02  | 8,06                | 9,48  | 10,75 |
| Dp Raffreddamento(E)                          | kPa   | 4,6                 | 6,8  | 8,3  | 7,5                 | 11,6 | 15,5 | 11,4                | 17,1 | 21,2  | 12,0                | 16,6  | 21,4  |
| Dp Riscaldamento (E)                          | kPa   | 9,4                 | 13,4 | 16,0 | 13,6                | 20,4 | 26,4 | 9,9                 | 14,3 | 17,3  | 19,6                | 26,3  | 33,0  |
| Assorbimento Motore (E)                       | W     | 40                  | 88   | 144  | 44                  | 115  | 225  | 80                  | 200  | 340   | 110                 | 253   | 530   |
| Potenza sonora mandata (E)                    | dB(A) | 45                  | 52   | 59   | 45                  | 55   | 61   | 52                  | 60   | 64    | 55                  | 62    | 67    |
| Potenza sonora ripEmission + irraggiata (E)   | dB(A) | 48                  | 55   | 61   | 48                  | 57   | 63   | 55                  | 62   | 66    | 58                  | 64    | 69    |
| Pressione sonora mandata (*)                  | dB(A) | 36                  | 43   | 50   | 36                  | 46   | 52   | 43                  | 51   | 55    | 46                  | 53    | 58    |
| Pressione sonora ripEmission + irraggiata (*) | dB(A) | 39                  | 46   | 52   | 39                  | 48   | 54   | 46                  | 53   | 57    | 49                  | 55    | 60    |
| Code Plenum                                   |       | 9034200             |      |      | 9034200             |      |      | 9034220             |      |       | 9034230             |       |       |

(E) = Eurovent certified performance.

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

## 2 pipe units.

The following standard rating conditions are used:

### COOLING (summer mode)

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

### HEATING (winter mode)

Entering air temperature + 20°C  
Water temperature + 45°C E.W.T. + 40°C L.W.T.

AVAILABLE PRESSURE: 0 Pa

## MTL UNITS WITH 3 ROW COIL

| MODEL                                 |       | MTL-ECM 13 |      |      |      |      | MTL-ECM 23 |      |      |      |       |
|---------------------------------------|-------|------------|------|------|------|------|------------|------|------|------|-------|
| Tensione Inverter                     | V     | 1          | 3    | 5    | 7,5  | 10   | 1          | 3    | 5    | 7,5  | 10    |
| Air flow                              | m³/h  | 505        | 950  | 1280 | 1580 | 1800 | 640        | 970  | 1375 | 2030 | 2625  |
| Raffreddam. Cooling total emission    | kW    | 3,00       | 4,05 | 4,78 | 5,33 | 5,69 | 3,70       | 4,82 | 5,91 | 7,22 | 8,12  |
| Raffreddam. Cooling sensible emission | kW    | 2,37       | 3,44 | 4,22 | 4,88 | 5,33 | 2,78       | 3,79 | 4,83 | 6,27 | 7,38  |
| Riscaldamento                         | kW    | 3,42       | 4,93 | 6,08 | 7,01 | 7,63 | 3,97       | 5,46 | 7,05 | 9,23 | 10,92 |
| Dp Raffreddamento                     | kPa   | 4,5        | 7,8  | 10,7 | 13,1 | 14,9 | 6,4        | 10,4 | 15,1 | 22,3 | 28,6  |
| Dp Riscaldamento                      | kPa   | 4,3        | 8,3  | 12,1 | 15,7 | 18,3 | 5,4        | 9,6  | 15,2 | 24,8 | 33,6  |
| Assorbimento motore                   | W     | 10         | 27   | 57   | 94   | 148  | 12         | 29   | 65   | 188  | 362   |
| Potenza acustica Lw                   | dB(A) | 35         | 44   | 49   | 56   | 60   | 39         | 46   | 53   | 61   | 69    |
| Pressione acustica (*)                | dB(A) | 26         | 35   | 40   | 47   | 51   | 30         | 37   | 44   | 52   | 60    |

| MODEL                                 |       | MTL-ECM 33 |      |      |       |       | MTL-ECM 43 |      |       |       |       |
|---------------------------------------|-------|------------|------|------|-------|-------|------------|------|-------|-------|-------|
| Tensione Inverter                     | V     | 1          | 3    | 5    | 7,5   | 10    | 1          | 3    | 5     | 7,5   | 10    |
| Air flow                              | m³/h  | 760        | 1190 | 1750 | 2565  | 3390  | 745        | 1275 | 1890  | 2730  | 3535  |
| Raffreddam. Cooling total emission    | kW    | 4,54       | 6,05 | 7,57 | 9,21  | 10,41 | 4,83       | 6,99 | 8,89  | 10,84 | 12,26 |
| Raffreddam. Cooling sensible emission | kW    | 3,36       | 4,71 | 6,16 | 7,94  | 9,42  | 3,48       | 5,29 | 7,01  | 8,98  | 10,56 |
| Riscaldamento                         | kW    | 4,75       | 6,71 | 8,89 | 11,57 | 13,88 | 5,17       | 8,01 | 10,84 | 14,15 | 16,91 |
| Dp Raffreddamento                     | kPa   | 6,6        | 11,1 | 16,9 | 24,8  | 32,4  | 5,0        | 9,8  | 15,3  | 22,4  | 28,9  |
| Dp Riscaldamento                      | kPa   | 5,3        | 9,9  | 16,5 | 26,6  | 36,9  | 3,2        | 7,2  | 12,4  | 20,2  | 27,8  |
| Assorbimento motore                   | W     | 13         | 30   | 83   | 256   | 531   | 12         | 30   | 76    | 219   | 484   |
| Potenza acustica Lw                   | dB(A) | 41         | 48   | 56   | 64    | 70    | 39         | 48   | 56    | 64    | 69    |
| Pressione acustica (*)                | dB(A) | 32         | 39   | 47   | 55    | 61    | 30         | 39   | 47    | 55    | 60    |

## MTL UNITS WITH 4 ROW COIL

| MODEL                                 |       | MTL-ECM 14 |      |      |      |      | MTL-ECM 24 |      |      |       |       |
|---------------------------------------|-------|------------|------|------|------|------|------------|------|------|-------|-------|
| Tensione Inverter                     | V     | 1          | 3    | 5    | 7,5  | 10   | 1          | 3    | 5    | 7,5   | 10    |
| Air flow                              | m³/h  | 460        | 870  | 1190 | 1520 | 1750 | 620        | 930  | 1345 | 1980  | 2580  |
| Raffreddam. Cooling total emission    | kW    | 2,90       | 4,46 | 5,39 | 6,17 | 6,64 | 4,09       | 5,42 | 6,85 | 8,50  | 9,67  |
| Raffreddam. Cooling sensible emission | kW    | 2,16       | 3,57 | 4,47 | 5,32 | 5,86 | 2,97       | 4,09 | 5,36 | 7,02  | 8,32  |
| Riscaldamento                         | kW    | 3,33       | 5,65 | 7,22 | 8,67 | 9,59 | 4,51       | 6,36 | 8,56 | 11,48 | 13,90 |
| Dp Raffreddamento                     | kPa   | 2,5        | 5,5  | 7,8  | 10,1 | 11,6 | 4,5        | 7,6  | 11,7 | 17,6  | 23,0  |
| Dp Riscaldamento                      | kPa   | 2,4        | 6,2  | 9,7  | 13,5 | 16,2 | 4,0        | 7,4  | 12,7 | 21,7  | 30,6  |
| Assorbimento motore                   | W     | 10         | 26   | 55   | 104  | 154  | 12         | 25   | 65   | 183   | 371   |
| Potenza acustica Lw                   | dB(A) | 35         | 44   | 49   | 56   | 60   | 39         | 46   | 53   | 61    | 69    |
| Pressione acustica (*)                | dB(A) | 26         | 35   | 40   | 47   | 51   | 30         | 37   | 44   | 52    | 60    |

| MODEL                                 |       | MTL-ECM 34 |      |       |       |       | MTL-ECM 44 |      |       |       |       |
|---------------------------------------|-------|------------|------|-------|-------|-------|------------|------|-------|-------|-------|
| Tensione Inverter                     | V     | 1          | 3    | 5     | 7,5   | 10    | 1          | 3    | 5     | 7,5   | 10    |
| Air flow                              | m³/h  | 740        | 1170 | 1720  | 2525  | 3290  | 730        | 1250 | 1860  | 2690  | 3475  |
| Raffreddam. Cooling total emission    | kW    | 5,13       | 7,09 | 9,08  | 11,24 | 12,79 | 5,39       | 8,09 | 10,58 | 13,18 | 15,06 |
| Raffreddam. Cooling sensible emission | kW    | 3,67       | 5,29 | 7,03  | 9,16  | 10,87 | 3,78       | 5,91 | 7,99  | 10,42 | 12,33 |
| Riscaldamento                         | kW    | 5,19       | 7,57 | 10,23 | 13,59 | 16,36 | 5,53       | 8,81 | 12,24 | 16,33 | 19,76 |
| Dp Raffreddamento                     | kPa   | 5,3        | 9,6  | 15,1  | 22,9  | 29,9  | 3,6        | 7,5  | 12,3  | 18,8  | 24,6  |
| Dp Riscaldamento                      | kPa   | 4,0        | 8,0  | 13,8  | 23,1  | 32,2  | 2,8        | 6,5  | 11,8  | 19,9  | 28,1  |
| Assorbimento motore                   | W     | 13         | 30   | 85    | 264   | 541   | 12         | 30   | 78    | 226   | 505   |
| Potenza acustica Lw                   | dB(A) | 41         | 48   | 56    | 64    | 70    | 39         | 48   | 56    | 64    | 69    |
| Pressione acustica (*)                | dB(A) | 32         | 39   | 47    | 55    | 61    | 30         | 39   | 47    | 55    | 60    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

## 4 pipe units.

The following standard rating conditions are used:

### COOLING (summer mode)

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

### HEATING (winter mode)

Entering air temperature + 20°C  
Water temperature + 65°C E.W.T. + 55°C L.W.T.

**AVAILABLE PRESSURE: 0 Pa**

## MTL UNITS WITH 3+1 ROW COIL

| MODEL                                 |       | MTL-ECM 13+1 |      |      |      |      | MTL-ECM 23+1 |      |      |      |      |
|---------------------------------------|-------|--------------|------|------|------|------|--------------|------|------|------|------|
| Tensione Inverter                     | V     | 1            | 3    | 5    | 7,5  | 10   | 1            | 3    | 5    | 7,5  | 10   |
| Air flow                              | m³/h  | 460          | 870  | 1190 | 1520 | 1750 | 620          | 930  | 1345 | 1980 | 2580 |
| Raffreddam. Cooling total emission    | kW    | 2,57         | 3,83 | 4,58 | 5,18 | 5,55 | 3,62         | 4,70 | 5,83 | 7,12 | 8,03 |
| Raffreddam. Cooling sensible emission | kW    | 1,98         | 3,21 | 3,99 | 4,71 | 5,17 | 2,71         | 3,68 | 4,76 | 6,16 | 7,27 |
| Riscaldamento                         | kW    | 2,51         | 3,76 | 4,50 | 5,13 | 5,52 | 3,36         | 4,35 | 5,43 | 6,67 | 7,61 |
| Dp Raffreddamento                     | kPa   | 3,4          | 7,1  | 9,8  | 12,6 | 14,4 | 6,1          | 9,9  | 14,8 | 21,9 | 28,1 |
| Dp Riscaldamento                      | kPa   | 5,3          | 11,1 | 15,3 | 19,3 | 22,1 | 8,6          | 13,8 | 20,5 | 29,7 | 37,5 |
| Assorbimento motore                   | W     | 10           | 26   | 55   | 104  | 154  | 12           | 25   | 65   | 183  | 371  |
| Potenza acustica Lw                   | dB(A) | 35           | 44   | 49   | 56   | 60   | 39           | 46   | 53   | 61   | 69   |
| Pressione acustica (*)                | dB(A) | 26           | 35   | 40   | 47   | 51   | 30           | 37   | 44   | 52   | 60   |

| MODEL                                 |       | MTL-ECM 33+1 |      |      |      |       | MTL-ECM 43+1 |      |      |       |       |
|---------------------------------------|-------|--------------|------|------|------|-------|--------------|------|------|-------|-------|
| Tensione Inverter                     | V     | 1            | 3    | 5    | 7,5  | 10    | 1            | 3    | 5    | 7,5   | 10    |
| Air flow                              | m³/h  | 740          | 1170 | 1720 | 2525 | 3290  | 730          | 1250 | 1860 | 2690  | 3475  |
| Raffreddam. Cooling total emission    | kW    | 4,45         | 5,98 | 7,49 | 9,11 | 10,22 | 4,76         | 6,91 | 8,81 | 10,75 | 12,12 |
| Raffreddam. Cooling sensible emission | kW    | 3,29         | 4,65 | 6,08 | 7,83 | 9,19  | 3,43         | 5,22 | 6,92 | 8,89  | 10,40 |
| Riscaldamento                         | kW    | 4,03         | 5,40 | 6,78 | 8,31 | 9,50  | 4,50         | 6,39 | 8,20 | 10,07 | 11,52 |
| Dp Raffreddamento                     | kPa   | 6,4          | 10,9 | 16,6 | 24,5 | 31,5  | 4,9          | 9,6  | 15,1 | 22,1  | 28,5  |
| Dp Riscaldamento                      | kPa   | 5,0          | 8,5  | 12,9 | 18,5 | 23,4  | 6,8          | 12,9 | 20,2 | 29,4  | 37,4  |
| Assorbimento motore                   | W     | 13           | 30   | 85   | 264  | 541   | 12           | 30   | 78   | 226   | 505   |
| Potenza acustica Lw                   | dB(A) | 41           | 48   | 56   | 64   | 70    | 39           | 48   | 56   | 64    | 69    |
| Pressione acustica (*)                | dB(A) | 32           | 39   | 47   | 55   | 61    | 30           | 39   | 47   | 55    | 60    |

## MTL UNITS WITH 4+1 ROW COIL

| MODEL                                 |       | MTL-ECM 14+1 |      |      |      |      | MTL-ECM 24+1 |      |      |      |      |
|---------------------------------------|-------|--------------|------|------|------|------|--------------|------|------|------|------|
| Tensione Inverter                     | V     | 1            | 3    | 5    | 7,5  | 10   | 1            | 3    | 5    | 7,5  | 10   |
| Air flow                              | m³/h  | 420          | 810  | 1130 | 1475 | 1710 | 600          | 900  | 1320 | 1945 | 2542 |
| Raffreddam. Cooling total emission    | kW    | 2,71         | 4,26 | 5,22 | 6,06 | 6,54 | 4,00         | 5,30 | 6,77 | 8,40 | 9,59 |
| Raffreddam. Cooling sensible emission | kW    | 2,00         | 3,38 | 4,29 | 5,19 | 5,75 | 2,89         | 3,99 | 5,28 | 6,92 | 8,23 |
| Riscaldamento                         | kW    | 2,36         | 3,60 | 4,37 | 5,05 | 5,45 | 3,29         | 4,27 | 5,38 | 6,61 | 7,55 |
| Dp Raffreddamento                     | kPa   | 2,2          | 5,1  | 7,4  | 9,8  | 11,5 | 4,3          | 7,3  | 11,4 | 17,3 | 22,6 |
| Dp Riscaldamento                      | kPa   | 4,8          | 10,2 | 14,5 | 18,8 | 21,6 | 8,3          | 13,3 | 20,1 | 29,2 | 37,0 |
| Assorbimento motore                   | W     | 10           | 25   | 64   | 117  | 158  | 12           | 25   | 66   | 182  | 377  |
| Potenza acustica Lw                   | dB(A) | 35           | 44   | 49   | 56   | 60   | 39           | 46   | 53   | 61   | 69   |
| Pressione acustica (*)                | dB(A) | 26           | 35   | 40   | 47   | 51   | 30           | 37   | 44   | 52   | 60   |

| MODEL                                 |       | MTL-ECM 34+1 |      |      |       |       | MTL-ECM 44+1 |      |       |       |       |
|---------------------------------------|-------|--------------|------|------|-------|-------|--------------|------|-------|-------|-------|
| Tensione Inverter                     | V     | 1            | 3    | 5    | 7,5   | 10    | 1            | 3    | 5     | 7,5   | 10    |
| Air flow                              | m³/h  | 710          | 1150 | 1690 | 2492  | 3215  | 720          | 1230 | 1835  | 2660  | 3425  |
| Raffreddam. Cooling total emission    | kW    | 4,97         | 7,00 | 8,97 | 11,15 | 12,61 | 5,33         | 8,00 | 10,48 | 13,10 | 14,92 |
| Raffreddam. Cooling sensible emission | kW    | 3,54         | 5,21 | 6,93 | 9,07  | 10,67 | 3,74         | 5,83 | 7,91  | 10,33 | 12,19 |
| Riscaldamento                         | kW    | 3,92         | 5,34 | 6,73 | 8,26  | 9,38  | 4,45         | 6,32 | 8,13  | 10,02 | 11,43 |
| Dp Raffreddamento                     | kPa   | 5,0          | 9,4  | 14,8 | 22,6  | 29,2  | 3,5          | 7,4  | 12,1  | 18,6  | 24,2  |
| Dp Riscaldamento                      | kPa   | 4,8          | 8,3  | 12,6 | 18,3  | 23,0  | 6,7          | 12,7 | 19,9  | 29,1  | 36,8  |
| Assorbimento motore                   | W     | 13           | 31   | 87   | 268   | 544   | 13           | 31   | 79    | 231   | 518   |
| Potenza acustica Lw                   | dB(A) | 41           | 48   | 56   | 64    | 70    | 39           | 48   | 56    | 64    | 69    |
| Pressione acustica (*)                | dB(A) | 32           | 39   | 47   | 55    | 61    | 30           | 39   | 47    | 55    | 60    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



4 pipe units.

The following standard rating conditions are used:

**COOLING (summer mode)**

Entering air temperature + 27°C d.b. + 19°C b.u.  
Water temperature + 7°C E.W.T. + 12°C L.W.T.

**HEATING (winter mode)**

Entering air temperature + 20°C  
Water temperature + 65°C E.W.T. + 55°C L.W.T.

**AVAILABLE PRESSURE: 0 Pa**

**MTL UNITS WITH 4+2 ROW COIL**

| <b>MODEL</b>                          |       | <b>MTL-ECM 13+2</b> |      |      |       |       | <b>MTL-ECM 23+2</b> |      |       |       |       |
|---------------------------------------|-------|---------------------|------|------|-------|-------|---------------------|------|-------|-------|-------|
| Tensione Inverter                     | V     | 1                   | 3    | 5    | 7,5   | 10    | 1                   | 3    | 5     | 7,5   | 10    |
| Air flow                              | m³/h  | 400                 | 740  | 1055 | 1405  | 1650  | 570                 | 865  | 1285  | 1895  | 2485  |
| Raffreddam. Cooling total emission    | kW    | 2,65                | 4,08 | 5,11 | 6,00  | 6,54  | 3,90                | 5,24 | 6,78  | 8,45  | 9,68  |
| Raffreddam. Cooling sensible emission | kW    | 1,94                | 3,20 | 4,16 | 5,10  | 5,71  | 2,80                | 3,92 | 5,26  | 6,92  | 8,27  |
| Riscaldamento                         | kW    | 4,49                | 7,16 | 9,16 | 11,07 | 12,26 | 6,37                | 8,75 | 11,61 | 15,03 | 17,83 |
| Dp Raffreddamento                     | kPa   | 2,1                 | 4,7  | 7,1  | 9,6   | 11,4  | 4,1                 | 7,1  | 11,4  | 17,5  | 23,0  |
| Dp Riscaldamento                      | kPa   | 3,2                 | 7,4  | 11,6 | 16,3  | 19,6  | 7,0                 | 12,5 | 20,9  | 33,4  | 45,5  |
| Assorbimento motore                   | W     | 9                   | 24   | 52   | 110   | 164   | 12                  | 26   | 67    | 182   | 382   |
| Potenza acustica Lw                   | dB(A) | 35                  | 44   | 49   | 56    | 60    | 39                  | 46   | 53    | 61    | 69    |
| Pressione acustica (*)                | dB(A) | 26                  | 35   | 40   | 47    | 51    | 30                  | 37   | 44    | 52    | 60    |

| <b>MODEL</b>                          |       | <b>MTL-ECM 33+2</b> |       |       |       |       | <b>MTL-ECM 43+2</b> |       |       |       |       |
|---------------------------------------|-------|---------------------|-------|-------|-------|-------|---------------------|-------|-------|-------|-------|
| Tensione Inverter                     | V     | 1                   | 3     | 5     | 7,5   | 10    | 1                   | 3     | 5     | 7,5   | 10    |
| Air flow                              | m³/h  | 690                 | 1125  | 1645  | 2441  | 3120  | 700                 | 1200  | 1800  | 2612  | 3355  |
| Raffreddam. Cooling total emission    | kW    | 4,86                | 6,90  | 8,82  | 11,01 | 12,42 | 5,21                | 7,85  | 10,34 | 12,96 | 14,75 |
| Raffreddam. Cooling sensible emission | kW    | 3,46                | 5,12  | 6,79  | 8,93  | 10,45 | 3,65                | 5,72  | 7,78  | 10,19 | 12,00 |
| Riscaldamento                         | kW    | 7,69                | 11,13 | 14,57 | 18,89 | 22,02 | 8,35                | 12,75 | 17,20 | 22,18 | 26,11 |
| Dp Raffreddamento                     | kPa   | 4,8                 | 9,1   | 14,4  | 22,1  | 28,4  | 2,8                 | 5,9   | 9,9   | 15,1  | 19,7  |
| Dp Riscaldamento                      | kPa   | 3,8                 | 7,4   | 12,0  | 19,3  | 25,4  | 5,6                 | 12,0  | 20,6  | 32,8  | 44,1  |
| Assorbimento motore                   | W     | 13                  | 31    | 89    | 274   | 542   | 13                  | 32    | 81    | 237   | 529   |
| Potenza acustica Lw                   | dB(A) | 41                  | 48    | 56    | 64    | 70    | 39                  | 48    | 56    | 64    | 69    |
| Pressione acustica (*)                | dB(A) | 32                  | 39    | 47    | 55    | 61    | 30                  | 39    | 47    | 55    | 60    |

(\*) = The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



Cooling emission of 3 row MTL-ECM coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |      |      |       | WT: 12/17 °C |      |      |       |
|-------------------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|------|------|-------|--------------|------|------|-------|
|                   |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|                   |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| <b>MTL-ECM 13</b> | 10  | 1800        | 6,19  | 5,16  | 1064 | 16,7  | 5,49        | 5,03  | 944  | 13,8  | 4,46         | 4,46 | 768  | 9,1   | 3,52         | 3,52 | 605  | 5,9   |
|                   | 7,5 | 1580        | 5,95  | 4,81  | 1024 | 14,8  | 5,20        | 4,63  | 895  | 12,1  | 4,15         | 4,15 | 714  | 8,0   | 3,25         | 3,25 | 559  | 5,1   |
|                   | 5   | 1280        | 5,32  | 4,15  | 914  | 12,1  | 4,65        | 3,98  | 800  | 9,9   | 3,67         | 3,67 | 632  | 6,4   | 2,86         | 2,86 | 491  | 4,0   |
|                   | 3   | 950         | 4,40  | 3,35  | 757  | 9,0   | 3,93        | 3,24  | 676  | 7,3   | 3,08         | 3,04 | 530  | 4,6   | 2,36         | 2,34 | 406  | 2,8   |
| <b>MTL-ECM 23</b> | 10  | 2625        | 9,31  | 7,46  | 1602 | 31,9  | 8,14        | 7,20  | 1400 | 26,4  | 6,55         | 6,55 | 1127 | 17,7  | 5,18         | 5,18 | 892  | 11,5  |
|                   | 7,5 | 2030        | 7,93  | 6,14  | 1363 | 25,3  | 7,13        | 6,02  | 1226 | 20,7  | 5,68         | 5,68 | 977  | 13,6  | 4,45         | 4,45 | 765  | 8,7   |
|                   | 5   | 1375        | 6,42  | 4,72  | 1105 | 17,3  | 5,75        | 4,57  | 989  | 14,1  | 4,53         | 4,30 | 779  | 9,0   | 3,49         | 3,49 | 600  | 5,6   |
|                   | 3   | 970         | 5,24  | 3,74  | 901  | 11,9  | 4,69        | 3,58  | 806  | 9,7   | 3,65         | 3,31 | 627  | 6,1   | 2,77         | 2,75 | 477  | 3,7   |
| <b>MTL-ECM 33</b> | 10  | 3390        | 11,63 | 9,36  | 2000 | 36,2  | 10,51       | 9,25  | 1808 | 30,0  | 8,46         | 8,46 | 1456 | 20,1  | 6,71         | 6,71 | 1154 | 13,0  |
|                   | 7,5 | 2565        | 10,12 | 7,78  | 1741 | 28,1  | 9,11        | 7,63  | 1567 | 23,1  | 7,25         | 7,25 | 1247 | 15,2  | 5,69         | 5,69 | 978  | 9,7   |
|                   | 5   | 1750        | 8,24  | 6,02  | 1417 | 19,4  | 7,38        | 5,83  | 1269 | 15,8  | 5,81         | 5,48 | 999  | 10,2  | 4,48         | 4,48 | 771  | 6,3   |
|                   | 3   | 1190        | 6,57  | 4,65  | 1130 | 12,8  | 5,87        | 4,43  | 1010 | 10,4  | 4,57         | 4,09 | 787  | 6,6   | 3,48         | 3,44 | 598  | 4,0   |
| <b>MTL-ECM 43</b> | 10  | 3535        | 13,60 | 10,46 | 2339 | 32,7  | 12,25       | 10,28 | 2107 | 26,9  | 9,80         | 9,80 | 1685 | 17,8  | 7,69         | 7,69 | 1323 | 11,3  |
|                   | 7,5 | 2730        | 11,90 | 8,84  | 2046 | 25,5  | 10,67       | 8,59  | 1835 | 21,0  | 8,46         | 8,18 | 1455 | 13,6  | 6,57         | 6,57 | 1130 | 8,5   |
|                   | 5   | 1890        | 9,67  | 6,90  | 1664 | 17,6  | 8,67        | 6,62  | 1490 | 14,3  | 6,78         | 6,17 | 1166 | 9,1   | 5,19         | 5,19 | 893  | 5,6   |
|                   | 3   | 1275        | 7,60  | 5,26  | 1306 | 11,3  | 6,80        | 4,99  | 1169 | 9,2   | 5,27         | 4,55 | 907  | 5,8   | 3,98         | 3,93 | 684  | 3,4   |
| 1                 | 745 | 5,23        | 3,49  | 899   | 5,8  | 4,70  | 3,28        | 809   | 4,7  | 3,63  | 2,93         | 624  | 2,9  | 2,69  | 2,63         | 463  | 1,7  |       |

Cooling emission of 3 row MTL-ECM coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |      |      |       | WT: 12/17 °C |      |      |       |
|-------------------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|------|------|-------|--------------|------|------|-------|
|                   |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|                   |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| <b>MTL-ECM 13</b> | 10  | 1800        | 5,53  | 5,04  | 951  | 13,8  | 4,98        | 4,98  | 857  | 11,2  | 3,97         | 3,97 | 683  | 7,4   | 3,45         | 3,45 | 593  | 5,7   |
|                   | 7,5 | 1580        | 5,18  | 4,61  | 891  | 12,2  | 4,64        | 4,52  | 798  | 9,9   | 3,68         | 3,68 | 633  | 6,4   | 3,18         | 3,18 | 547  | 4,9   |
|                   | 5   | 1280        | 4,62  | 3,97  | 795  | 9,9   | 4,13        | 3,87  | 710  | 8,0   | 3,25         | 3,25 | 559  | 5,1   | 2,68         | 2,68 | 461  | 3,6   |
|                   | 3   | 950         | 3,91  | 3,23  | 673  | 7,3   | 3,47        | 3,12  | 597  | 5,8   | 2,70         | 2,67 | 465  | 3,7   | 2,06         | 2,05 | 355  | 2,2   |
| <b>MTL-ECM 23</b> | 10  | 2625        | 8,10  | 7,16  | 1393 | 26,3  | 7,33        | 7,09  | 1260 | 21,7  | 5,84         | 5,84 | 1004 | 14,4  | 4,83         | 4,83 | 830  | 10,2  |
|                   | 7,5 | 2030        | 7,09  | 6,00  | 1220 | 20,7  | 6,35        | 5,87  | 1092 | 16,9  | 5,04         | 5,04 | 866  | 11,0  | 3,92         | 3,92 | 675  | 6,9   |
|                   | 5   | 1375        | 5,73  | 4,57  | 986  | 14,0  | 5,10        | 4,42  | 877  | 11,4  | 3,98         | 3,98 | 685  | 7,2   | 3,05         | 3,05 | 525  | 4,4   |
|                   | 3   | 970         | 4,66  | 3,58  | 801  | 9,6   | 4,13        | 3,43  | 711  | 7,7   | 3,19         | 3,15 | 548  | 4,8   | 2,41         | 2,39 | 414  | 2,9   |
| <b>MTL-ECM 33</b> | 10  | 3390        | 10,46 | 9,21  | 1799 | 29,9  | 9,40        | 9,08  | 1617 | 24,6  | 7,55         | 7,55 | 1298 | 16,3  | 6,10         | 6,10 | 1050 | 11,2  |
|                   | 7,5 | 2565        | 9,06  | 7,61  | 1559 | 23,1  | 8,12        | 7,45  | 1397 | 18,8  | 6,43         | 6,43 | 1106 | 12,2  | 5,01         | 5,01 | 861  | 7,7   |
|                   | 5   | 1750        | 7,34  | 5,82  | 1263 | 15,7  | 6,55        | 5,64  | 1126 | 12,7  | 5,11         | 5,11 | 879  | 8,1   | 3,93         | 3,93 | 675  | 4,9   |
|                   | 3   | 1190        | 5,85  | 4,44  | 1006 | 10,4  | 5,19        | 4,25  | 892  | 8,3   | 4,00         | 3,92 | 688  | 5,2   | 3,02         | 2,99 | 520  | 3,1   |
| <b>MTL-ECM 43</b> | 10  | 3535        | 12,20 | 10,25 | 2099 | 26,8  | 10,95       | 10,06 | 1883 | 21,9  | 8,70         | 8,70 | 1496 | 14,3  | 6,79         | 6,79 | 1168 | 9,1   |
|                   | 7,5 | 2730        | 10,61 | 8,57  | 1826 | 20,8  | 9,49        | 8,35  | 1632 | 16,9  | 7,47         | 7,47 | 1284 | 10,9  | 5,76         | 5,76 | 992  | 6,7   |
|                   | 5   | 1890        | 8,61  | 6,61  | 1481 | 14,2  | 7,67        | 6,38  | 1319 | 11,5  | 5,94         | 5,94 | 1022 | 7,2   | 4,52         | 4,52 | 778  | 4,3   |
|                   | 3   | 1275        | 6,76  | 4,99  | 1163 | 9,2   | 5,99        | 4,76  | 1030 | 7,3   | 4,59         | 4,35 | 790  | 4,5   | 3,45         | 3,41 | 593  | 2,6   |
| 1                 | 745 | 4,67        | 3,29  | 804   | 4,7  | 4,13  | 3,10        | 711   | 3,7  | 3,14  | 2,77         | 540  | 2,3  | 2,31  | 2,27         | 397  | 1,3  |       |

Note: the power absorption (Watt) at page 49 must be subtracted from the total and sensible cooling emission.

## Cooling emission of 3 row MTL-ECM coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |          |          |           |              | WT: 8/13 °C |          |           |              |          | WT: 10/15 °C |           |              |          | WT: 12/17 °C |           |              |  |
|-------------------|-----|-------------|----------|----------|-----------|--------------|-------------|----------|-----------|--------------|----------|--------------|-----------|--------------|----------|--------------|-----------|--------------|--|
|                   |     | Qv<br>m³/h  | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW    | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW     | Qw<br>l/h | Dp(c)<br>kPa |  |
| <b>MTL-ECM 13</b> | 10  | 1800        | 4,96     | 4,96     | 854       | 11,2         | 4,45        | 4,45     | 765       | 9,1          | 3,53     | 3,53         | 607       | 5,9          | 3,09     | 3,09         | 532       | 4,7          |  |
|                   | 7,5 | 1580        | 4,63     | 4,50     | 797       | 9,9          | 4,13        | 4,13     | 711       | 8,0          | 3,26     | 3,26         | 561       | 5,2          | 2,85     | 2,85         | 491       | 4,1          |  |
|                   | 5   | 1280        | 4,12     | 3,85     | 708       | 8,0          | 3,66        | 3,66     | 629       | 6,4          | 2,86     | 2,86         | 493       | 4,1          | 2,50     | 2,50         | 429       | 3,2          |  |
|                   | 3   | 950         | 3,46     | 3,11     | 595       | 5,8          | 3,06        | 3,01     | 527       | 4,7          | 2,37     | 2,35         | 407       | 2,9          | 2,05     | 2,04         | 353       | 2,2          |  |
|                   | 1   | 505         | 2,55     | 2,12     | 438       | 3,3          | 2,24        | 2,03     | 385       | 2,6          | 1,70     | 1,67         | 292       | 1,6          | 1,45     | 1,43         | 250       | 1,2          |  |
| <b>MTL-ECM 23</b> | 10  | 2625        | 7,28     | 7,03     | 1252      | 21,7         | 6,53        | 6,53     | 1122      | 17,7         | 5,20     | 5,20         | 894       | 11,6         | 4,53     | 4,53         | 779       | 9,0          |  |
|                   | 7,5 | 2030        | 6,34     | 5,85     | 1090      | 16,9         | 5,66        | 5,66     | 973       | 13,7         | 4,46     | 4,46         | 767       | 8,8          | 3,86     | 3,86         | 664       | 6,8          |  |
|                   | 5   | 1375        | 5,09     | 4,41     | 875       | 11,3         | 4,51        | 4,27     | 776       | 9,1          | 3,50     | 3,50         | 602       | 5,7          | 2,99     | 2,99         | 515       | 4,3          |  |
|                   | 3   | 970         | 4,12     | 3,43     | 708       | 7,7          | 3,63        | 3,29     | 625       | 6,1          | 2,78     | 2,76         | 479       | 3,7          | 2,34     | 2,32         | 402       | 2,7          |  |
|                   | 1   | 640         | 3,15     | 2,48     | 542       | 4,7          | 2,77        | 2,36     | 476       | 3,7          | 2,09     | 2,06         | 359       | 2,2          | 1,58     | 1,56         | 272       | 1,3          |  |
| <b>MTL-ECM 33</b> | 10  | 3390        | 9,39     | 9,04     | 1615      | 24,6         | 8,44        | 8,44     | 1451      | 20,1         | 6,72     | 6,72         | 1157      | 13,2         | 5,86     | 5,86         | 1007      | 10,3         |  |
|                   | 7,5 | 2565        | 8,10     | 7,42     | 1393      | 18,7         | 7,23        | 7,23     | 1244      | 15,3         | 5,70     | 5,70         | 981       | 9,8          | 4,93     | 4,93         | 848       | 7,5          |  |
|                   | 5   | 1750        | 6,53     | 5,62     | 1123      | 12,7         | 5,79        | 5,44     | 995       | 10,2         | 4,50     | 4,50         | 773       | 6,4          | 3,84     | 3,84         | 661       | 4,8          |  |
|                   | 3   | 1190        | 5,16     | 4,25     | 888       | 8,3          | 4,56        | 4,07     | 784       | 6,6          | 3,49     | 3,45         | 600       | 4,0          | 2,83     | 2,81         | 487       | 2,8          |  |
|                   | 1   | 760         | 3,86     | 3,00     | 664       | 4,9          | 3,39        | 2,85     | 583       | 3,9          | 2,56     | 2,52         | 440       | 2,3          | 1,89     | 1,86         | 325       | 1,3          |  |
| <b>MTL-ECM 43</b> | 10  | 3535        | 10,91    | 10,01    | 1876      | 21,9         | 9,75        | 9,75     | 1678      | 17,8         | 7,71     | 7,71         | 1326      | 11,5         | 6,65     | 6,65         | 1144      | 8,8          |  |
|                   | 7,5 | 2730        | 9,46     | 8,32     | 1626      | 16,9         | 8,42        | 8,10     | 1447      | 13,6         | 6,58     | 6,58         | 1132      | 8,6          | 5,63     | 5,63         | 969       | 6,5          |  |
|                   | 5   | 1890        | 7,63     | 6,36     | 1312      | 11,5         | 6,75        | 6,13     | 1162      | 9,1          | 5,21     | 5,21         | 896       | 5,7          | 4,38     | 4,38         | 753       | 4,1          |  |
|                   | 3   | 1275        | 5,96     | 4,76     | 1026      | 7,3          | 5,25        | 4,54     | 903       | 5,8          | 3,99     | 3,94         | 687       | 3,5          | 3,02     | 2,99         | 520       | 2,1          |  |
|                   | 1   | 745         | 4,11     | 3,11     | 707       | 3,7          | 3,61        | 2,93     | 620       | 2,9          | 2,70     | 2,62         | 465       | 1,7          | 1,98     | 1,95         | 340       | 1,0          |  |

**Note:** the power absorption (Watt) at page 49 must be subtracted from the total and sensible cooling emission.

### LEGENDA

|                                       |                           |
|---------------------------------------|---------------------------|
| <b>WT</b> = Water temperature         | <b>Speed</b> = Fan speed  |
| <b>Pc</b> = Cooling total emission    | <b>MAX</b> = High speed   |
| <b>Ps</b> = Cooling sensible emission | <b>MED</b> = Medium speed |
| <b>Qw</b> = Water flow                | <b>MIN</b> = Low speed    |
| <b>Dp(c)</b> = Water pressure drop    | <b>Qv</b> = Air flow      |



Cooling emission of 4 row MTL-ECM coil

Entering air temperature: 27°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |      |      |       |
|-------------------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|------|------|-------|
|                   |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|                   |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| <b>MTL-ECM 14</b> | 10  | 1750        | 7,28  | 5,77  | 1252 | 13,3  | 6,53        | 5,61  | 1124 | 10,9  | 5,15         | 5,15  | 886  | 7,0   | 3,99         | 3,99 | 687  | 4,4   |
|                   | 7,5 | 1520        | 6,75  | 5,23  | 1161 | 11,6  | 6,04        | 5,06  | 1038 | 9,4   | 4,75         | 4,75  | 817  | 6,0   | 3,66         | 3,66 | 629  | 3,7   |
|                   | 5   | 1190        | 5,89  | 4,40  | 1013 | 9,0   | 5,26        | 4,23  | 904  | 7,3   | 4,09         | 3,92  | 704  | 4,6   | 3,12         | 3,12 | 537  | 2,8   |
|                   | 3   | 870         | 4,87  | 3,53  | 838  | 6,4   | 4,34        | 3,37  | 746  | 5,2   | 3,35         | 3,08  | 577  | 3,2   | 2,53         | 2,50 | 435  | 1,9   |
|                   | 1   | 460         | 3,17  | 2,16  | 546  | 2,9   | 2,82        | 2,03  | 485  | 2,4   | 2,16         | 1,81  | 372  | 1,5   | 1,60         | 1,58 | 275  | 0,8   |
| <b>MTL-ECM 24</b> | 10  | 2580        | 10,77 | 8,33  | 1853 | 26,1  | 9,66        | 8,11  | 1662 | 21,4  | 7,67         | 7,67  | 1320 | 13,9  | 5,98         | 5,98 | 1029 | 8,8   |
|                   | 7,5 | 1980        | 9,35  | 6,95  | 1607 | 20,2  | 8,37        | 6,72  | 1439 | 16,5  | 6,59         | 6,30  | 1133 | 10,6  | 5,07         | 5,07 | 872  | 6,5   |
|                   | 5   | 1345        | 7,50  | 5,31  | 1290 | 13,5  | 6,68        | 5,07  | 1150 | 11,0  | 5,20         | 4,66  | 895  | 6,9   | 3,95         | 3,95 | 679  | 4,1   |
|                   | 3   | 930         | 5,91  | 4,07  | 1017 | 8,8   | 5,28        | 3,86  | 908  | 7,1   | 4,07         | 3,48  | 701  | 4,4   | 3,05         | 3,02 | 525  | 2,6   |
|                   | 1   | 620         | 4,46  | 2,97  | 767  | 5,3   | 3,99        | 2,80  | 686  | 4,3   | 3,07         | 2,48  | 528  | 2,6   | 2,27         | 2,22 | 391  | 1,5   |
| <b>MTL-ECM 34</b> | 10  | 3290        | 14,30 | 10,95 | 2460 | 34,0  | 12,85       | 10,65 | 2210 | 27,9  | 10,19        | 10,19 | 1752 | 18,1  | 7,92         | 7,92 | 1362 | 11,4  |
|                   | 7,5 | 2525        | 12,39 | 9,13  | 2132 | 26,2  | 11,10       | 8,81  | 1909 | 21,4  | 8,73         | 8,22  | 1502 | 13,7  | 6,71         | 6,71 | 1155 | 8,5   |
|                   | 5   | 1720        | 9,92  | 6,97  | 1707 | 17,5  | 8,87        | 6,66  | 1526 | 14,2  | 6,90         | 6,08  | 1186 | 9,0   | 5,23         | 5,23 | 900  | 5,4   |
|                   | 3   | 1170        | 7,73  | 5,27  | 1329 | 11,1  | 6,91        | 4,99  | 1188 | 9,0   | 5,34         | 4,48  | 918  | 5,6   | 4,00         | 3,95 | 687  | 3,3   |
|                   | 1   | 740         | 5,58  | 3,68  | 960  | 6,2   | 5,00        | 3,46  | 861  | 5,0   | 3,86         | 3,05  | 664  | 3,1   | 2,85         | 2,71 | 491  | 1,8   |
| <b>MTL-ECM 44</b> | 10  | 3475        | 16,76 | 12,42 | 2883 | 28,2  | 15,04       | 12,01 | 2587 | 23,0  | 11,84        | 11,22 | 2036 | 14,8  | 9,11         | 9,11 | 1567 | 9,1   |
|                   | 7,5 | 2690        | 14,50 | 10,39 | 2494 | 21,6  | 12,98       | 9,97  | 2232 | 17,6  | 10,13        | 9,19  | 1743 | 11,2  | 7,73         | 7,73 | 1329 | 6,8   |
|                   | 5   | 1860        | 11,56 | 7,96  | 1989 | 14,3  | 10,33       | 7,56  | 1776 | 11,6  | 8,00         | 6,84  | 1376 | 7,3   | 6,02         | 6,02 | 1035 | 4,3   |
|                   | 3   | 1250        | 8,82  | 5,92  | 1516 | 8,8   | 7,89        | 5,58  | 1357 | 7,1   | 6,09         | 4,96  | 1047 | 4,4   | 4,52         | 4,45 | 778  | 2,6   |
|                   | 1   | 730         | 5,84  | 3,80  | 1005 | 4,2   | 5,26        | 3,57  | 905  | 3,4   | 4,06         | 3,12  | 699  | 2,1   | 2,99         | 2,75 | 514  | 1,2   |

Cooling emission of 4 row MTL-ECM coil

Entering air temperature: 26°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |       |       |      |       | WT: 8/13 °C |       |      |       | WT: 10/15 °C |       |      |       | WT: 12/17 °C |      |      |       |
|-------------------|-----|-------------|-------|-------|------|-------|-------------|-------|------|-------|--------------|-------|------|-------|--------------|------|------|-------|
|                   |     | Qv          | Pc    | Ps    | Qw   | Dp(c) | Pc          | Ps    | Qw   | Dp(c) | Pc           | Ps    | Qw   | Dp(c) | Pc           | Ps   | Qw   | Dp(c) |
|                   |     | m³/h        | kW    | kW    | l/h  | kPa   | kW          | kW    | l/h  | kPa   | kW           | kW    | l/h  | kPa   | kW           | kW   | l/h  | kPa   |
| <b>MTL-ECM 14</b> | 10  | 1750        | 6,49  | 5,59  | 1117 | 10,8  | 5,79        | 5,43  | 996  | 8,8   | 4,55         | 4,55  | 783  | 5,6   | 3,81         | 3,81 | 655  | 4,0   |
|                   | 7,5 | 1520        | 6,01  | 5,05  | 1034 | 9,4   | 5,35        | 4,89  | 920  | 7,6   | 4,17         | 4,17  | 718  | 4,8   | 3,35         | 3,35 | 576  | 3,2   |
|                   | 5   | 1190        | 5,23  | 4,23  | 899  | 7,3   | 4,63        | 4,06  | 796  | 5,8   | 3,58         | 3,58  | 616  | 3,6   | 2,72         | 2,72 | 468  | 2,2   |
|                   | 3   | 870         | 4,32  | 3,37  | 743  | 5,1   | 3,81        | 3,21  | 656  | 4,1   | 2,92         | 2,89  | 502  | 2,5   | 2,19         | 2,17 | 377  | 1,5   |
|                   | 1   | 460         | 2,80  | 2,04  | 482  | 2,4   | 2,47        | 1,92  | 425  | 1,9   | 1,87         | 1,71  | 321  | 1,1   | 1,37         | 1,35 | 236  | 0,6   |
| <b>MTL-ECM 24</b> | 10  | 2580        | 9,63  | 8,09  | 1656 | 21,3  | 8,61        | 7,88  | 1481 | 17,3  | 6,79         | 6,79  | 1168 | 11,2  | 5,26         | 5,26 | 905  | 7,0   |
|                   | 7,5 | 1980        | 8,32  | 6,71  | 1432 | 16,4  | 7,42        | 6,49  | 1277 | 13,2  | 5,80         | 5,80  | 997  | 8,4   | 4,44         | 4,44 | 763  | 5,1   |
|                   | 5   | 1345        | 6,65  | 5,07  | 1144 | 10,9  | 5,90        | 4,85  | 1015 | 8,7   | 4,54         | 4,54  | 782  | 5,4   | 3,43         | 3,43 | 589  | 3,2   |
|                   | 3   | 930         | 5,25  | 3,86  | 902  | 7,1   | 4,64        | 3,66  | 798  | 5,6   | 3,54         | 3,31  | 609  | 3,4   | 2,63         | 2,60 | 453  | 2,0   |
|                   | 1   | 620         | 3,96  | 2,81  | 682  | 4,2   | 3,50        | 2,64  | 603  | 3,4   | 2,65         | 2,34  | 456  | 2,0   | 1,95         | 1,92 | 335  | 1,2   |
| <b>MTL-ECM 34</b> | 10  | 3290        | 12,78 | 10,62 | 2199 | 27,8  | 11,42       | 10,31 | 1965 | 22,7  | 9,00         | 9,00  | 1548 | 14,5  | 6,96         | 6,96 | 1197 | 9,0   |
|                   | 7,5 | 2525        | 11,06 | 8,80  | 1902 | 21,3  | 9,86        | 8,50  | 1697 | 17,2  | 7,68         | 7,68  | 1321 | 10,9  | 5,87         | 5,87 | 1010 | 6,6   |
|                   | 5   | 1720        | 8,82  | 6,66  | 1518 | 14,1  | 7,82        | 6,35  | 1345 | 11,4  | 6,03         | 5,81  | 1037 | 7,0   | 4,54         | 4,54 | 781  | 4,2   |
|                   | 3   | 1170        | 6,86  | 5,00  | 1180 | 9,0   | 6,08        | 4,73  | 1045 | 7,2   | 4,63         | 4,25  | 797  | 4,4   | 3,44         | 3,40 | 591  | 2,5   |
|                   | 1   | 740         | 4,97  | 3,47  | 855  | 5,0   | 4,40        | 3,25  | 756  | 4,0   | 3,33         | 2,87  | 573  | 2,4   | 2,44         | 2,40 | 419  | 1,3   |
| <b>MTL-ECM 44</b> | 10  | 3475        | 14,94 | 11,98 | 2570 | 22,9  | 13,34       | 11,57 | 2294 | 18,5  | 10,41        | 10,41 | 1790 | 11,7  | 7,97         | 7,97 | 1371 | 7,2   |
|                   | 7,5 | 2690        | 12,91 | 9,97  | 2220 | 17,5  | 11,47       | 9,55  | 1973 | 14,1  | 8,88         | 8,88  | 1527 | 8,8   | 6,72         | 6,72 | 1157 | 5,3   |
|                   | 5   | 1860        | 10,26 | 7,57  | 1765 | 11,6  | 9,09        | 7,19  | 1564 | 9,2   | 6,97         | 6,51  | 1199 | 5,7   | 5,20         | 5,20 | 895  | 3,3   |
|                   | 3   | 1250        | 7,84  | 5,59  | 1348 | 7,1   | 6,93        | 5,26  | 1192 | 5,6   | 5,27         | 4,69  | 906  | 3,4   | 3,88         | 3,83 | 668  | 1,9   |
|                   | 1   | 730         | 5,22  | 3,58  | 899  | 3,4   | 4,63        | 3,35  | 796  | 2,7   | 3,50         | 2,93  | 602  | 1,6   | 2,54         | 2,50 | 437  | 0,9   |

Note: the power absorption (Watt) at page 49 must be subtracted from the total and sensible cooling emission.

## Cooling emission of 4 row MTL-ECM coil

Entering air temperature: 25°C – R. H.: 50% – AVAILABLE PRESSURE: 0 Pa

| Mod.              | Vdc | WT: 7/12 °C |          |          |           |              | WT: 8/13 °C |          |           |              |          | WT: 10/15 °C |           |              |          |          | WT: 12/17 °C |              |  |  |  |
|-------------------|-----|-------------|----------|----------|-----------|--------------|-------------|----------|-----------|--------------|----------|--------------|-----------|--------------|----------|----------|--------------|--------------|--|--|--|
|                   |     | Qv<br>m³/h  | Pc<br>kW | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW    | Ps<br>kW | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW     | Qw<br>l/h | Dp(c)<br>kPa | Pc<br>kW | Ps<br>kW | Qw<br>l/h    | Dp(c)<br>kPa |  |  |  |
| <b>MTL-ECM 14</b> | 10  | 1750        | 5,78     | 5,41     | 994       | 8,7          | 5,14        | 5,14     | 884       | 7,0          | 4,01     | 4,01         | 690       | 4,4          | 3,52     | 3,52     | 606          | 3,5          |  |  |  |
|                   | 7,5 | 1520        | 5,33     | 4,87     | 917       | 7,6          | 4,73        | 4,73     | 813       | 6,0          | 3,67     | 3,67         | 631       | 3,8          | 3,21     | 3,21     | 553          | 3,0          |  |  |  |
|                   | 5   | 1190        | 4,61     | 4,05     | 794       | 5,8          | 4,08        | 3,90     | 702       | 4,6          | 3,14     | 3,14         | 539       | 2,8          | 2,72     | 2,72     | 468          | 2,2          |  |  |  |
|                   | 3   | 870         | 3,80     | 3,21     | 654       | 4,1          | 3,34        | 3,06     | 575       | 3,2          | 2,54     | 2,52         | 437       | 1,9          | 2,19     | 2,17     | 376          | 1,5          |  |  |  |
|                   | 1   | 460         | 2,46     | 1,92     | 423       | 1,9          | 2,15        | 1,81     | 371       | 1,5          | 1,61     | 1,58         | 276       | 0,8          | 1,27     | 1,26     | 219          | 0,6          |  |  |  |
| <b>MTL-ECM 24</b> | 10  | 2580        | 8,58     | 7,84     | 1475      | 17,3         | 7,65        | 7,65     | 1315      | 14,0         | 6,00     | 6,00         | 1032      | 8,9          | 5,23     | 5,23     | 900          | 7,0          |  |  |  |
|                   | 7,5 | 1980        | 7,39     | 6,46     | 1271      | 13,2         | 6,56        | 6,25     | 1128      | 10,6         | 5,09     | 5,09         | 876       | 6,6          | 4,40     | 4,40     | 756          | 5,1          |  |  |  |
|                   | 5   | 1345        | 5,87     | 4,85     | 1010      | 8,7          | 5,19        | 4,64     | 892       | 6,9          | 3,96     | 3,96         | 682       | 4,2          | 3,36     | 3,36     | 579          | 3,1          |  |  |  |
|                   | 3   | 930         | 4,62     | 3,66     | 794       | 5,6          | 4,06        | 3,47     | 698       | 4,4          | 3,07     | 3,03         | 528       | 2,6          | 2,38     | 2,35     | 409          | 1,7          |  |  |  |
|                   | 1   | 620         | 3,48     | 2,64     | 599       | 3,4          | 3,05        | 2,48     | 525       | 2,6          | 2,28     | 2,21         | 393       | 1,5          | 1,66     | 1,64     | 286          | 0,9          |  |  |  |
| <b>MTL-ECM 34</b> | 10  | 3290        | 11,39    | 10,28    | 1959      | 22,6         | 10,15       | 10,15    | 1746      | 18,2         | 7,95     | 7,95         | 1367      | 11,6         | 6,94     | 6,94     | 1194         | 9,1          |  |  |  |
|                   | 7,5 | 2525        | 9,81     | 8,47     | 1688      | 17,2         | 8,70        | 8,16     | 1497      | 13,8         | 6,74     | 6,74         | 1159      | 8,6          | 5,83     | 5,83     | 1003         | 6,6          |  |  |  |
|                   | 5   | 1720        | 7,79     | 6,35     | 1340      | 11,3         | 6,87        | 6,06     | 1181      | 9,0          | 5,25     | 5,25         | 902       | 5,5          | 4,30     | 4,30     | 740          | 3,8          |  |  |  |
|                   | 3   | 1170        | 6,05     | 4,73     | 1041      | 7,2          | 5,32        | 4,48     | 915       | 5,6          | 4,01     | 3,96         | 689       | 3,4          | 2,98     | 2,95     | 513          | 2,0          |  |  |  |
|                   | 1   | 740         | 4,38     | 3,26     | 753       | 4,0          | 3,84        | 3,06     | 660       | 3,1          | 2,86     | 2,70         | 492       | 1,8          | 2,08     | 2,05     | 358          | 1,0          |  |  |  |
| <b>MTL-ECM 44</b> | 10  | 3475        | 13,29    | 11,54    | 2285      | 18,5         | 11,79       | 11,13    | 2027      | 14,8         | 9,14     | 9,14         | 1572      | 9,3          | 7,92     | 7,92     | 1362         | 7,2          |  |  |  |
|                   | 7,5 | 2690        | 11,42    | 9,53     | 1964      | 14,0         | 10,10       | 9,14     | 1737      | 11,2         | 7,76     | 7,76         | 1334      | 6,9          | 6,64     | 6,64     | 1143         | 5,2          |  |  |  |
|                   | 5   | 1860        | 9,05     | 7,19     | 1557      | 9,2          | 7,97        | 6,83     | 1371      | 7,3          | 6,04     | 6,04         | 1040      | 4,4          | 4,71     | 4,71     | 810          | 2,8          |  |  |  |
|                   | 3   | 1250        | 6,90     | 5,27     | 1187      | 5,6          | 6,06        | 4,97     | 1042      | 4,4          | 4,54     | 4,43         | 781       | 2,6          | 3,32     | 3,29     | 572          | 1,5          |  |  |  |
|                   | 1   | 730         | 4,60     | 3,36     | 792       | 2,7          | 4,04        | 3,14     | 695       | 2,1          | 3,00     | 2,74         | 516       | 1,2          | 2,16     | 2,13     | 372          | 0,7          |  |  |  |

**Note:** the power absorption (Watt) at page 49 must be subtracted from the total and sensible cooling emission.

### LEGENDA

|                                       |                           |
|---------------------------------------|---------------------------|
| <b>WT</b> = Water temperature         | <b>Speed</b> = Fan speed  |
| <b>Pc</b> = Cooling total emission    | <b>MAX</b> = High speed   |
| <b>Ps</b> = Cooling sensible emission | <b>MED</b> = Medium speed |
| <b>Qw</b> = Water flow                | <b>MIN</b> = Low speed    |
| <b>Dp(c)</b> = Water pressure drop    | <b>Qv</b> = Air flow      |



Heating emission of 3 row MTL-ECM coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.       | Vdc | Qv   | WT: 70 / 60 °C |      |       | WT: 60 / 50 °C |      |       | WT: 55 / 45 °C |      |       | WT: 50 / 40 °C |      |       | WT: 50 / 45 °C |      |       | WT: 45 / 40 °C |      |       |
|------------|-----|------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|
|            |     |      | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) |
|            |     |      | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   |
| MTL-ECM 13 | 10  | 1800 | 15,53          | 1336 | 17,4  | 11,81          | 1016 | 11,0  | 9,96           | 857  | 8,3   | 8,10           | 696  | 5,8   | 9,47           | 1629 | 26,4  | 7,63           | 1313 | 18,3  |
|            | 7,5 | 1580 | 14,25          | 1225 | 14,9  | 10,86          | 934  | 9,4   | 9,16           | 787  | 7,1   | 7,45           | 641  | 5,0   | 8,68           | 1493 | 22,6  | 7,01           | 1206 | 15,7  |
|            | 5   | 1280 | 12,35          | 1062 | 11,5  | 9,43           | 811  | 7,3   | 7,96           | 685  | 5,5   | 6,49           | 558  | 3,9   | 7,52           | 1294 | 17,4  | 6,08           | 1046 | 12,1  |
|            | 3   | 950  | 10,01          | 861  | 7,8   | 7,66           | 658  | 5,0   | 6,48           | 557  | 3,8   | 5,30           | 456  | 2,7   | 6,09           | 1047 | 11,9  | 4,93           | 849  | 8,3   |
|            | 1   | 505  | 6,92           | 595  | 4,0   | 5,33           | 458  | 2,6   | 4,52           | 389  | 2,0   | 3,72           | 320  | 1,4   | 4,21           | 723  | 6,1   | 3,42           | 588  | 4,3   |
| MTL-ECM 23 | 10  | 2625 | 22,12          | 1902 | 31,8  | 16,92          | 1455 | 20,3  | 14,31          | 1230 | 15,3  | 11,68          | 1005 | 10,8  | 13,49          | 2320 | 48,3  | 10,92          | 1878 | 33,6  |
|            | 7,5 | 2030 | 18,69          | 1607 | 23,4  | 14,31          | 1231 | 15,0  | 12,12          | 1043 | 11,4  | 9,93           | 854  | 8,1   | 11,38          | 1958 | 35,6  | 9,23           | 1587 | 24,8  |
|            | 5   | 1375 | 14,26          | 1226 | 14,4  | 10,96          | 943  | 9,3   | 9,30           | 800  | 7,0   | 7,65           | 658  | 5,0   | 8,68           | 1492 | 21,7  | 7,05           | 1213 | 15,2  |
|            | 3   | 970  | 11,05          | 950  | 9,0   | 8,52           | 733  | 5,9   | 7,25           | 623  | 4,5   | 5,97           | 513  | 3,2   | 6,71           | 1155 | 13,7  | 5,46           | 940  | 9,6   |
|            | 1   | 640  | 8,02           | 690  | 5,1   | 6,21           | 534  | 3,3   | 5,30           | 455  | 2,5   | 4,38           | 377  | 1,8   | 4,87           | 837  | 7,6   | 3,97           | 683  | 5,4   |
| MTL-ECM 33 | 10  | 3390 | 28,09          | 2416 | 34,9  | 21,49          | 1848 | 22,3  | 18,20          | 1565 | 16,8  | 14,88          | 1280 | 11,9  | 17,14          | 2948 | 53,0  | 13,88          | 2387 | 36,9  |
|            | 7,5 | 2565 | 23,42          | 2014 | 25,1  | 17,96          | 1545 | 16,1  | 15,23          | 1310 | 12,2  | 12,47          | 1073 | 8,7   | 14,27          | 2454 | 38,1  | 11,57          | 1991 | 26,6  |
|            | 5   | 1750 | 17,97          | 1546 | 15,6  | 13,83          | 1189 | 10,0  | 11,76          | 1011 | 7,6   | 9,66           | 831  | 5,5   | 10,94          | 1882 | 23,6  | 8,89           | 1529 | 16,5  |
|            | 3   | 1190 | 13,56          | 1166 | 9,3   | 10,47          | 900  | 6,1   | 8,91           | 766  | 4,6   | 7,35           | 632  | 3,3   | 8,25           | 1419 | 14,1  | 6,71           | 1154 | 9,9   |
|            | 1   | 760  | 9,59           | 825  | 5,0   | 7,43           | 639  | 3,3   | 6,35           | 546  | 2,5   | 5,26           | 452  | 1,8   | 5,82           | 1001 | 7,5   | 4,75           | 817  | 5,3   |
| MTL-ECM 43 | 10  | 3535 | 34,28          | 2948 | 26,3  | 26,26          | 2259 | 16,9  | 22,25          | 1913 | 12,8  | 18,24          | 1568 | 9,1   | 20,88          | 3591 | 39,9  | 16,91          | 2908 | 27,8  |
|            | 7,5 | 2730 | 28,67          | 2465 | 19,1  | 22,04          | 1895 | 12,3  | 18,69          | 1607 | 9,3   | 15,35          | 1320 | 6,6   | 17,46          | 3002 | 28,9  | 14,15          | 2435 | 20,2  |
|            | 5   | 1890 | 21,92          | 1885 | 11,7  | 16,91          | 1454 | 7,6   | 14,38          | 1237 | 5,8   | 11,84          | 1018 | 4,2   | 13,33          | 2293 | 17,7  | 10,84          | 1864 | 12,4  |
|            | 3   | 1275 | 16,19          | 1393 | 6,8   | 12,53          | 1077 | 4,4   | 10,69          | 919  | 3,4   | 8,84           | 760  | 2,4   | 9,82           | 1689 | 10,2  | 8,01           | 1378 | 7,2   |
|            | 1   | 745  | 10,43          | 897  | 3,0   | 8,12           | 698  | 2,0   | 6,96           | 598  | 1,5   | 5,78           | 497  | 1,1   | 6,32           | 1087 | 4,6   | 5,17           | 890  | 3,2   |

Heating emission of 4 row MTL-ECM coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.       | Vdc | Qv   | WT: 70 / 60 °C |      |       | WT: 60 / 50 °C |      |       | WT: 55 / 45 °C |      |       | WT: 50 / 40 °C |      |       | WT: 50 / 45 °C |      |       | WT: 45 / 40 °C |      |       |
|------------|-----|------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|
|            |     |      | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) |
|            |     |      | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   |
| MTL-ECM 14 | 10  | 1750 | 19,48          | 1675 | 15,4  | 14,91          | 1282 | 9,9   | 12,61          | 1085 | 7,4   | 10,30          | 886  | 5,3   | 11,85          | 2039 | 23,3  | 9,59           | 1650 | 16,2  |
|            | 7,5 | 1520 | 17,58          | 1512 | 12,8  | 13,49          | 1160 | 8,2   | 11,42          | 982  | 6,2   | 9,34           | 803  | 4,4   | 10,70          | 1840 | 19,3  | 8,67           | 1491 | 13,5  |
|            | 5   | 1190 | 14,64          | 1259 | 9,2   | 11,25          | 968  | 5,9   | 9,55           | 822  | 4,5   | 7,84           | 674  | 3,2   | 8,89           | 1529 | 13,8  | 7,22           | 1242 | 9,7   |
|            | 3   | 870  | 11,45          | 985  | 5,9   | 8,83           | 760  | 3,8   | 7,51           | 646  | 2,9   | 6,19           | 533  | 2,1   | 6,95           | 1195 | 8,8   | 5,65           | 972  | 6,2   |
|            | 1   | 460  | 6,72           | 578  | 2,2   | 5,23           | 449  | 1,5   | 4,47           | 385  | 1,1   | 3,71           | 319  | 0,8   | 4,06           | 699  | 3,3   | 3,33           | 572  | 2,4   |
| MTL-ECM 24 | 10  | 2580 | 28,15          | 2421 | 28,9  | 21,62          | 1860 | 18,6  | 18,34          | 1577 | 14,1  | 15,06          | 1295 | 10,1  | 17,12          | 2944 | 43,8  | 13,90          | 2390 | 30,6  |
|            | 7,5 | 1980 | 23,26          | 2000 | 20,4  | 17,91          | 1540 | 13,3  | 15,24          | 1310 | 10,1  | 12,53          | 1078 | 7,2   | 14,13          | 2431 | 30,9  | 11,48          | 1975 | 21,7  |
|            | 5   | 1345 | 17,30          | 1488 | 12,0  | 13,38          | 1151 | 7,8   | 11,42          | 982  | 6,0   | 9,43           | 811  | 4,3   | 10,50          | 1806 | 18,0  | 8,56           | 1473 | 12,7  |
|            | 3   | 930  | 12,83          | 1104 | 7,0   | 9,97           | 858  | 4,6   | 8,53           | 733  | 3,5   | 7,08           | 609  | 2,6   | 7,78           | 1338 | 10,4  | 6,36           | 1094 | 7,4   |
|            | 1   | 620  | 9,10           | 783  | 3,7   | 7,10           | 611  | 2,5   | 6,10           | 524  | 1,9   | 5,08           | 437  | 1,4   | 5,50           | 946  | 5,6   | 4,51           | 776  | 4,0   |
| MTL-ECM 34 | 10  | 3290 | 33,12          | 2848 | 30,4  | 25,44          | 2187 | 19,6  | 21,60          | 1857 | 14,8  | 17,73          | 1525 | 10,6  | 20,16          | 3468 | 46,1  | 16,36          | 2813 | 32,2  |
|            | 7,5 | 2525 | 27,49          | 2364 | 21,7  | 21,18          | 1821 | 14,1  | 18,01          | 1549 | 10,7  | 14,82          | 1274 | 7,7   | 16,72          | 2875 | 32,8  | 13,59          | 2337 | 23,1  |
|            | 5   | 1720 | 20,69          | 1779 | 12,9  | 15,98          | 1375 | 8,4   | 13,63          | 1172 | 6,4   | 11,25          | 968  | 4,7   | 12,56          | 2161 | 19,5  | 10,23          | 1760 | 13,8  |
|            | 3   | 1170 | 15,28          | 1314 | 7,5   | 11,86          | 1020 | 4,9   | 10,14          | 872  | 3,8   | 8,41           | 723  | 2,7   | 9,27           | 1595 | 11,3  | 7,57           | 1303 | 8,0   |
|            | 1   | 740  | 10,47          | 900  | 3,8   | 8,16           | 702  | 2,5   | 7,00           | 602  | 1,9   | 5,83           | 501  | 1,4   | 6,34           | 1090 | 5,6   | 5,19           | 893  | 4,0   |
| MTL-ECM 44 | 10  | 3475 | 39,94          | 3435 | 26,5  | 30,79          | 2648 | 17,2  | 26,18          | 2252 | 13,1  | 21,59          | 1856 | 9,4   | 24,27          | 4175 | 39,9  | 19,76          | 3398 | 28,1  |
|            | 7,5 | 2690 | 32,99          | 2837 | 18,7  | 25,49          | 2192 | 12,2  | 21,73          | 1869 | 9,3   | 17,95          | 1544 | 6,7   | 20,03          | 3446 | 28,2  | 16,33          | 2809 | 19,9  |
|            | 5   | 1860 | 24,69          | 2123 | 11,1  | 19,17          | 1648 | 7,3   | 16,39          | 1409 | 5,6   | 13,57          | 1167 | 4,1   | 14,98          | 2576 | 16,6  | 12,24          | 2105 | 11,8  |
|            | 3   | 1250 | 17,77          | 1528 | 6,1   | 13,85          | 1191 | 4,0   | 11,87          | 1021 | 3,1   | 9,88           | 850  | 2,3   | 10,76          | 1850 | 9,1   | 8,81           | 1516 | 6,5   |
|            | 1   | 730  | 11,12          | 956  | 2,6   | 8,72           | 750  | 1,7   | 7,51           | 646  | 1,4   | 6,29           | 541  | 1,0   | 6,72           | 1155 | 3,9   | 5,53           | 951  | 2,8   |

**LEGENDA** WT = Water temperature      Dp(c) = Perdita di carico lato acqua      MAX = High speed  
 Ph = Emission                              Qv = Air flow                              MED = Medium speed  
 Qw = Water flow                              Speed = Fan speed                      MIN = Low speed

## Heating emission of 1 row additional MTL-ECM coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.                | Vdc | Qv   | WT: 80 / 70 °C |      |       | WT: 75 / 65 °C |      |       | WT: 70 / 60 °C |      |       | WT: 65 / 55 °C |     |       | WT: 60 / 50 °C |     |       | WT: 55 / 45 °C |     |       |
|---------------------|-----|------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|-----|-------|----------------|-----|-------|----------------|-----|-------|
|                     |     |      | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw  | Dp(c) | Ph             | Qw  | Dp(c) | Ph             | Qw  | Dp(c) |
|                     |     |      | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h | Kpa   | kW             | l/h | Kpa   | kW             | l/h | Kpa   |
| <b>MTL-ECM 13+1</b> | 10  | 1750 | 7,82           | 673  | 39,4  | 7,06           | 607  | 33,2  | 6,29           | 541  | 27,4  | 5,52           | 475 | 22,1  | 4,75           | 409 | 17,1  | 3,99           | 343 | 12,7  |
|                     | 7,5 | 1520 | 7,26           | 625  | 34,4  | 6,56           | 564  | 29,0  | 5,84           | 502  | 24,0  | 5,13           | 441 | 19,3  | 4,42           | 380 | 15,0  | 3,71           | 319 | 11,1  |
|                     | 5   | 1190 | 6,36           | 547  | 27,1  | 5,75           | 494  | 22,9  | 5,13           | 441  | 19,0  | 4,50           | 387 | 15,3  | 3,88           | 333 | 11,9  | 3,25           | 280 | 8,8   |
|                     | 3   | 870  | 5,32           | 457  | 19,6  | 4,80           | 413  | 16,5  | 4,28           | 368  | 13,7  | 3,76           | 324 | 11,1  | 3,25           | 279 | 8,6   | 2,73           | 235 | 6,4   |
| 1                   | 460 | 3,53 | 303            | 9,3  | 3,19  | 274            | 7,9  | 2,85  | 245            | 6,6  | 2,51  | 216            | 5,3 | 2,17  | 186            | 4,2 | 1,83  | 157            | 3,1 |       |
| <b>MTL-ECM 23+1</b> | 10  | 2580 | 10,74          | 924  | 66,7  | 9,71           | 835  | 56,3  | 8,66           | 744  | 46,6  | 7,61           | 654 | 37,5  | 6,56           | 564 | 29,3  | 5,51           | 474 | 21,8  |
|                     | 7,5 | 1980 | 9,41           | 810  | 52,4  | 8,51           | 731  | 44,4  | 7,59           | 652  | 36,7  | 6,67           | 573 | 29,7  | 5,76           | 495 | 23,1  | 4,84           | 416 | 17,2  |
|                     | 5   | 1345 | 7,65           | 658  | 36,2  | 6,91           | 594  | 30,6  | 6,17           | 530  | 25,4  | 5,43           | 467 | 20,5  | 4,69           | 403 | 16,0  | 3,95           | 339 | 12,0  |
|                     | 3   | 930  | 6,12           | 527  | 24,2  | 5,53           | 476  | 20,5  | 4,94           | 425  | 17,0  | 4,35           | 374 | 13,8  | 3,77           | 324 | 10,8  | 3,17           | 273 | 8,1   |
| 1                   | 620 | 4,72 | 406            | 15,1 | 4,27  | 367            | 12,8 | 3,81  | 328            | 10,7 | 3,36  | 289            | 8,6 | 2,91  | 251            | 6,8 | 2,46  | 212            | 5,1 |       |
| <b>MTL-ECM 33+1</b> | 10  | 3290 | 13,47          | 1159 | 42,0  | 12,14          | 1044 | 35,3  | 10,82          | 931  | 29,2  | 9,50           | 817 | 23,4  | 8,16           | 702 | 18,2  | 6,84           | 588 | 13,5  |
|                     | 7,5 | 2525 | 11,78          | 1013 | 33,0  | 10,63          | 914  | 27,8  | 9,47           | 814  | 23,0  | 8,31           | 715 | 18,5  | 7,16           | 616 | 14,4  | 6,00           | 516 | 10,6  |
|                     | 5   | 1720 | 9,60           | 826  | 22,8  | 8,66           | 745  | 19,3  | 7,72           | 664  | 15,9  | 6,78           | 583 | 12,9  | 5,85           | 503 | 10,0  | 4,91           | 422 | 7,4   |
|                     | 3   | 1170 | 7,61           | 655  | 15,0  | 6,87           | 591  | 12,7  | 6,13           | 527  | 10,5  | 5,40           | 464 | 8,5   | 4,65           | 400 | 6,6   | 3,92           | 337 | 4,9   |
| 1                   | 740 | 5,67 | 487            | 8,8  | 5,12  | 440            | 7,5  | 4,58  | 394            | 6,2  | 4,03  | 347            | 5,0 | 3,48  | 299            | 3,9 | 2,93  | 252            | 2,9 |       |
| <b>MTL-ECM 43+1</b> | 10  | 3475 | 16,22          | 1395 | 65,9  | 14,64          | 1259 | 55,8  | 13,09          | 1125 | 46,2  | 11,52          | 991 | 37,4  | 9,94           | 855 | 29,2  | 8,38           | 721 | 21,8  |
|                     | 7,5 | 2690 | 14,17          | 1218 | 51,8  | 12,82          | 1102 | 43,8  | 11,44          | 984  | 36,3  | 10,07          | 866 | 29,4  | 8,70           | 749 | 23,0  | 7,34           | 631 | 17,2  |
|                     | 5   | 1860 | 11,50          | 989  | 35,5  | 10,41          | 895  | 30,1  | 9,29           | 799  | 25,0  | 8,20           | 705 | 20,2  | 7,09           | 610 | 15,8  | 5,98           | 514 | 11,9  |
|                     | 3   | 1250 | 8,95           | 769  | 22,6  | 8,10           | 697  | 19,1  | 7,24           | 623  | 15,9  | 6,39           | 549 | 12,9  | 5,53           | 476 | 10,1  | 4,67           | 402 | 7,6   |
| 1                   | 730 | 6,28 | 540            | 11,9 | 5,69  | 489            | 10,1 | 5,09  | 438            | 8,4  | 4,50  | 387            | 6,8 | 3,90  | 335            | 5,4 | 3,30  | 284            | 4,1 |       |

## Heating emission of 2 row additional MTL-ECM coil

Entering air temperature: 20°C – AVAILABLE PRESSURE: 0 Pa

| Mod.                | Vdc | Qv   | WT: 65 / 55 °C |      |       | WT: 60 / 50 °C |      |       | WT: 55 / 45 °C |      |       | WT: 50 / 40 °C |      |       | WT: 45 / 40 °C |      |       | WT: 45 / 35 °C |      |       |
|---------------------|-----|------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|----------------|------|-------|
|                     |     |      | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) | Ph             | Qw   | Dp(c) |
|                     |     |      | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   | kW             | l/h  | Kpa   |
| <b>MTL-ECM 13+2</b> | 10  | 1650 | 12,26          | 1054 | 19,6  | 10,59          | 911  | 15,3  | 8,91           | 766  | 11,4  | 7,23           | 622  | 8     | 6,84           | 1177 | 25,4  | 5,54           | 476  | 5     |
|                     | 7,5 | 1405 | 11,07          | 952  | 16,3  | 9,57           | 823  | 12,8  | 8,05           | 693  | 9,5   | 6,54           | 563  | 6,7   | 6,18           | 1063 | 21,1  | 5,03           | 432  | 4,2   |
|                     | 5   | 1055 | 9,16           | 788  | 11,6  | 7,94           | 682  | 9,1   | 6,69           | 576  | 6,8   | 5,45           | 469  | 4,8   | 5,12           | 880  | 15    | 4,21           | 362  | 3,1   |
|                     | 3   | 740  | 7,16           | 616  | 7,4   | 6,21           | 534  | 5,8   | 5,25           | 452  | 4,4   | 4,29           | 369  | 3,1   | 3,99           | 686  | 9,6   | 3,33           | 286  | 2     |
| 1                   | 400 | 4,49 | 387            | 3,2  | 3,91  | 336            | 2,5  | 3,33  | 286            | 1,9  | 2,74  | 235            | 1,4  | 2,51  | 431            | 4,1  | 2,14  | 184            | 0,9  |       |
| <b>MTL-ECM 23+2</b> | 10  | 2485 | 17,83          | 1534 | 45,5  | 15,43          | 1327 | 35,7  | 13,04          | 1122 | 26,8  | 10,63          | 914  | 18,9  | 9,97           | 1715 | 59,2  | 8,22           | 707  | 12,1  |
|                     | 7,5 | 1895 | 15,03          | 1292 | 33,4  | 13,03          | 1121 | 26,3  | 11,02          | 948  | 19,8  | 9,01           | 775  | 14    | 8,4            | 1445 | 43,4  | 6,98           | 600  | 9     |
|                     | 5   | 1285 | 11,61          | 999  | 20,9  | 10,09          | 867  | 16,5  | 8,55           | 736  | 12,5  | 7,01           | 603  | 8,9   | 6,49           | 1116 | 27,2  | 5,46           | 470  | 5,8   |
|                     | 3   | 865  | 8,75           | 752  | 12,5  | 7,62           | 655  | 9,9   | 6,48           | 557  | 7,6   | 5,33           | 458  | 5,4   | 4,89           | 841  | 16,3  | 4,17           | 359  | 3,6   |
| 1                   | 570 | 6,37 | 548            | 7    | 5,56  | 478            | 5,6  | 4,74  | 408            | 4,3  | 3,92  | 337            | 3,1  | 3,56  | 612            | 9,1  | 3,08  | 265            | 2,1  |       |
| <b>MTL-ECM 33+2</b> | 10  | 3120 | 22,02          | 1894 | 25,4  | 19             | 1634 | 19,9  | 16,02          | 1378 | 14,9  | 12,99          | 1117 | 10,4  | 12,3           | 2115 | 33,1  | 9,97           | 857  | 6,6   |
|                     | 7,5 | 2441 | 18,89          | 1624 | 19,3  | 16,34          | 1405 | 15,1  | 13,77          | 1184 | 11,3  | 11,2           | 963  | 7,9   | 10,55          | 1815 | 25    | 8,62           | 741  | 5,1   |
|                     | 5   | 1645 | 14,57          | 1253 | 12    | 12,62          | 1085 | 9,5   | 10,67          | 918  | 7,1   | 8,71           | 749  | 5     | 8,13           | 1399 | 15,6  | 6,74           | 580  | 3,2   |
|                     | 3   | 1125 | 11,13          | 957  | 7,4   | 9,66           | 831  | 5,8   | 8,19           | 705  | 4,4   | 6,71           | 577  | 3,1   | 6,21           | 1068 | 9,6   | 5,22           | 449  | 2     |
| 1                   | 690 | 7,69 | 662            | 3,8  | 6,69  | 576            | 3    | 5,70  | 490            | 2,3  | 4,69  | 404            | 1,6  | 4,29  | 738            | 4,9  | 3,68  | 316            | 1,1  |       |
| <b>MTL-ECM 43+2</b> | 10  | 3355 | 26,11          | 2245 | 44,1  | 22,66          | 1949 | 34,7  | 19,19          | 1650 | 26,2  | 15,69          | 1349 | 18,6  | 14,6           | 2511 | 57,4  | 12,19          | 1049 | 12    |
|                     | 7,5 | 2612 | 22,18          | 1907 | 32,8  | 19,27          | 1657 | 25,9  | 16,35          | 1406 | 19,6  | 13,4           | 1152 | 14    | 12,41          | 2134 | 42,6  | 10,44          | 897  | 9,1   |
|                     | 5   | 1800 | 17,2           | 1479 | 20,6  | 14,96          | 1286 | 16,3  | 12,71          | 1093 | 12,4  | 10,45          | 899  | 8,9   | 9,6            | 1651 | 26,8  | 8,18           | 704  | 5,8   |
|                     | 3   | 1200 | 12,75          | 1096 | 12    | 11,11          | 956  | 9,5   | 9,47           | 814  | 7,3   | 7,82           | 673  | 5,3   | 7,12           | 1224 | 15,6  | 6,15           | 529  | 3,5   |
| 1                   | 700 | 8,35 | 718            | 5,6  | 7,3   | 628            | 4,4  | 6,25  | 537            | 3,4  | 5,18  | 446            | 2,5  | 4,66  | 801            | 7,2  | 4,11  | 353            | 1,7  |       |

**LEGENDA** WT = Water temperature    Dp(c) = Perdita di carico lato acqua    MAX = High speed  
 Ph = Emission    Qv = Air flow    MED = Medium speed  
 Qw = Water flow    Speed = Fan speed    MIN = Low speed

**Air flow (m<sup>3</sup>/h)**  
depending on speed and requested available pressure with 4 row coil

| <b>Available pressure (Pa)</b> |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <b>Mod.</b>                    | Vdc  | 0    | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  | 120  |
| <b>MTL-ECM<br/>14</b>          | 10   | 1750 | 1720 | 1680 | 1640 | 1600 | 1555 | 1005 | 1455 | 1400 | 1340 | 1270 | 1200 | 1120 |
|                                | 9,5  | 1705 | 1675 | 1640 | 1595 | 1550 | 1500 | 1450 | 1390 | 1325 | 1260 | 1180 | 1100 | 1020 |
|                                | 9    | 1665 | 1630 | 1590 | 1545 | 1500 | 1440 | 1380 | 1320 | 1240 | 1160 | 1080 | 990  | 900  |
|                                | 8,5  | 1615 | 1575 | 1535 | 1485 | 1435 | 1370 | 1300 | 1220 | 1140 | 1045 | 950  | 860  | 770  |
|                                | 8    | 1560 | 1520 | 1475 | 1420 | 1360 | 1285 | 1200 | 1105 | 1010 | 910  | 815  | 720  | 625  |
|                                | 7,5  | 1520 | 1470 | 1410 | 1345 | 1275 | 1190 | 1100 | 1000 | 900  | 790  | 690  | 585  | 485  |
|                                | 7    | 1460 | 1400 | 1335 | 1260 | 1180 | 1090 | 985  | 880  | 760  | 650  | 540  | 430  | -    |
|                                | 6,5  | 1405 | 1330 | 1260 | 1175 | 1080 | 980  | 860  | 740  | 620  | 500  | -    | -    | -    |
|                                | 6    | 1330 | 1250 | 1165 | 1070 | 965  | 850  | 720  | 600  | 460  | -    | -    | -    | -    |
|                                | 5,5  | 1265 | 1180 | 1080 | 975  | 855  | 720  | 580  | 435  | -    | -    | -    | -    | -    |
|                                | 5    | 1190 | 1090 | 980  | 860  | 720  | 560  | 400  | -    | -    | -    | -    | -    | -    |
|                                | 4,5  | 1020 | 1010 | 882  | 740  | 580  | 410  | -    | -    | -    | -    | -    | -    | -    |
|                                | 4    | 1040 | 920  | 770  | 610  | 440  | 265  | -    | -    | -    | -    | -    | -    | -    |
| 3                              | 870  | 700  | 505  | 300  | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |
| 2                              | 650  | 445  | 160  | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |
| 1                              | 460  | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |
| <b>MTL-ECM<br/>24</b>          | 10   | 2580 | 2555 | 2525 | 2500 | 2470 | 2440 | 2410 | 2370 | 2330 | 2280 | 2240 | 2180 | 2120 |
|                                | 9,5  | 2460 | 2440 | 2410 | 2380 | 2350 | 2320 | 2280 | 2245 | 2205 | 2160 | 2115 | 2060 | 1995 |
|                                | 9    | 2360 | 2340 | 2310 | 2280 | 2255 | 2220 | 2185 | 2150 | 2105 | 2060 | 2010 | 1950 | 1880 |
|                                | 8,5  | 2225 | 2200 | 2165 | 2140 | 2100 | 2065 | 2030 | 1990 | 1940 | 1895 | 1840 | 1780 | 1705 |
|                                | 8    | 2100 | 2070 | 2040 | 2005 | 1975 | 1940 | 1900 | 1860 | 1820 | 1765 | 1710 | 1645 | 1575 |
|                                | 7,5  | 1980 | 1940 | 1900 | 1860 | 1820 | 1780 | 1740 | 1700 | 1645 | 1600 | 1540 | 1470 | 1385 |
|                                | 7    | 1830 | 1800 | 1760 | 1725 | 1685 | 1645 | 1605 | 1565 | 1520 | 1465 | 1400 | 1335 | 1225 |
|                                | 6,5  | 1740 | 1690 | 1645 | 1600 | 1555 | 1510 | 1460 | 1410 | 1355 | 1295 | 1210 | 1110 | 950  |
|                                | 6    | 1590 | 1545 | 1500 | 1460 | 1410 | 1365 | 1320 | 1265 | 1200 | 1135 | 1060 | 940  | 700  |
|                                | 5,5  | 1465 | 1420 | 1380 | 1330 | 1280 | 1225 | 1170 | 1105 | 1040 | 960  | 840  | 660  | 340  |
|                                | 5    | 1345 | 1300 | 1245 | 1195 | 1140 | 1085 | 1025 | 960  | 880  | 780  | 650  | 300  | -    |
|                                | 4,5  | 1240 | 1180 | 1115 | 1050 | 990  | 925  | 855  | 780  | 695  | 585  | 420  | -    | -    |
|                                | 4    | 1080 | 1015 | 960  | 900  | 840  | 780  | 705  | 630  | 540  | 420  | -    | -    | -    |
| 3                              | 930  | 840  | 760  | 685  | 620  | 555  | 480  | 405  | 320  | -    | -    | -    | -    |      |
| 2                              | 760  | 660  | 560  | 460  | 380  | -    | -    | -    | -    | -    | -    | -    | -    |      |
| 1                              | 620  | 490  | 380  | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |
| <b>MTL-ECM<br/>34</b>          | 10   | 3290 | 3240 | 3190 | 3140 | 3100 | 3050 | 3000 | 2960 | 2910 | 2860 | 2820 | 2770 | 2720 |
|                                | 9,5  | 3120 | 3080 | 3045 | 3000 | 2960 | 2920 | 2880 | 2835 | 2790 | 2740 | 2690 | 2640 | 2600 |
|                                | 9    | 3000 | 2960 | 2920 | 2880 | 2840 | 2800 | 2760 | 2710 | 2660 | 2610 | 2560 | 2510 | 2460 |
|                                | 8,5  | 2840 | 2805 | 2770 | 2735 | 2695 | 2650 | 2605 | 2560 | 2520 | 2470 | 2415 | 2360 | 2300 |
|                                | 8    | 2720 | 2680 | 2640 | 2600 | 2565 | 2525 | 2480 | 2425 | 2370 | 2310 | 2250 | 2190 | 2130 |
|                                | 7,5  | 2525 | 2485 | 2455 | 2415 | 2375 | 2330 | 2280 | 2225 | 2175 | 2115 | 2055 | 1990 | 1930 |
|                                | 7    | 2380 | 2335 | 2295 | 2250 | 2205 | 2160 | 2100 | 2040 | 1980 | 1920 | 1860 | 1795 | 1735 |
|                                | 6,5  | 2200 | 2155 | 2110 | 2065 | 2015 | 1950 | 1890 | 1830 | 1760 | 1700 | 1640 | 1580 | 1520 |
|                                | 6    | 2040 | 1980 | 1920 | 1860 | 1800 | 1730 | 1665 | 1600 | 1540 | 1480 | 1430 | 1375 | 1320 |
|                                | 5,5  | 1840 | 1795 | 1750 | 1690 | 1630 | 1560 | 1495 | 1425 | 1360 | 1300 | 1240 | 1190 | 1140 |
|                                | 5    | 1720 | 1650 | 1585 | 1510 | 1420 | 1350 | 1280 | 1205 | 1155 | 1100 | 1055 | 1000 | 960  |
|                                | 4,5  | 1540 | 1490 | 1420 | 1340 | 1255 | 1180 | 1120 | 1060 | 1000 | 945  | 895  | 840  | 800  |
|                                | 4    | 1430 | 1340 | 1250 | 1155 | 1080 | 1010 | 945  | 885  | 835  | 785  | 740  | 700  | 655  |
| 3                              | 1170 | 1060 | 940  | 840  | 755  | 685  | 630  | 575  | 520  | 465  | -    | -    | -    |      |
| 2                              | 900  | 760  | 640  | 550  | 475  | 405  | -    | -    | -    | -    | -    | -    | -    |      |
| 1                              | 740  | 550  | 440  | 355  | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |
| <b>MTL-ECM<br/>44</b>          | 10   | 3475 | 3425 | 3380 | 3335 | 3280 | 3240 | 3185 | 3140 | 3085 | 3035 | 2980 | 2930 | 2880 |
|                                | 9,5  | 3320 | 3280 | 3240 | 3200 | 3155 | 3105 | 3060 | 3010 | 2960 | 2905 | 2855 | 2800 | 2740 |
|                                | 9    | 3200 | 3160 | 3120 | 3080 | 3035 | 2980 | 2940 | 2885 | 2830 | 2730 | 2720 | 2660 | 2605 |
|                                | 8,5  | 3335 | 2990 | 2945 | 2900 | 2860 | 2805 | 2760 | 2700 | 2650 | 2600 | 2540 | 2480 | 2420 |
|                                | 8    | 2875 | 2830 | 2780 | 2740 | 2690 | 2640 | 2580 | 2530 | 2475 | 2420 | 2360 | 2295 | 2235 |
|                                | 7,5  | 2690 | 2640 | 2590 | 2540 | 2495 | 2440 | 2380 | 2330 | 2270 | 2205 | 2145 | 2080 | 2020 |
|                                | 7    | 2510 | 2460 | 2405 | 2360 | 2300 | 2240 | 2180 | 2120 | 2060 | 2000 | 1940 | 1880 | 1815 |
|                                | 6,5  | 2340 | 2280 | 2230 | 2180 | 2120 | 2060 | 2000 | 1935 | 1870 | 1800 | 1740 | 1670 | 1600 |
|                                | 6    | 2170 | 2115 | 2060 | 1995 | 1930 | 1860 | 1795 | 1720 | 1645 | 1580 | 1500 | 1435 | 1360 |
|                                | 5,5  | 2020 | 1960 | 1895 | 1825 | 1760 | 1680 | 1605 | 1535 | 1460 | 1385 | 1310 | 1240 | 1170 |
|                                | 5    | 1860 | 1790 | 1720 | 1640 | 1565 | 1495 | 1410 | 1330 | 1255 | 1180 | 1110 | 1040 | 975  |
|                                | 4,5  | 1700 | 1620 | 1540 | 1460 | 1375 | 1285 | 1210 | 1135 | 1060 | 990  | 920  | 855  | 795  |
|                                | 4    | 1500 | 1420 | 1320 | 1240 | 1155 | 1070 | 995  | 920  | 850  | 790  | 720  | 660  | -    |
| 3                              | 1250 | 1120 | 1000 | 900  | 810  | 730  | 660  | 585  | -    | -    | -    | -    | -    |      |
| 2                              | 940  | 800  | 680  | 580  | 485  | -    | -    | -    | -    | -    | -    | -    | -    |      |
| 1                              | 730  | 570  | 460  | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |

**Power absorption (Watt)  
depending on air flow and available pressure**

| Mod.              | Available pressure (Pa) |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                   | V                       | 0   | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 | 110 | 120 |
| <b>MTL-ECM 14</b> | 10                      | 154 | 158 | 161 | 164 | 168 | 170 | 172 | 172 | 172 | 170 | 167 | 163 | 157 |
|                   | 9,5                     | 142 | 146 | 150 | 154 | 157 | 158 | 159 | 158 | 157 | 154 | 149 | 144 | 137 |
|                   | 9                       | 133 | 137 | 140 | 143 | 144 | 146 | 145 | 144 | 140 | 135 | 130 | 123 | 117 |
|                   | 8,5                     | 122 | 126 | 130 | 133 | 134 | 133 | 131 | 127 | 122 | 116 | 110 | 105 | 100 |
|                   | 8                       | 113 | 118 | 120 | 121 | 120 | 118 | 114 | 109 | 103 | 98  | 93  | 88  | 83  |
|                   | 7,5                     | 104 | 108 | 110 | 110 | 107 | 103 | 98  | 93  | 88  | 84  | 79  | 74  | 70  |
|                   | 7                       | 96  | 98  | 98  | 96  | 92  | 87  | 82  | 78  | 74  | 70  | 65  | 60  | -   |
|                   | 6,5                     | 88  | 86  | 84  | 82  | 78  | 74  | 69  | 65  | 60  | 56  | -   | -   | -   |
|                   | 6                       | 75  | 74  | 71  | 68  | 64  | 60  | 56  | 52  | 46  | -   | -   | -   | -   |
|                   | 5,5                     | 65  | 63  | 60  | 57  | 54  | 50  | 45  | 40  | -   | -   | -   | -   | -   |
|                   | 5                       | 55  | 53  | 50  | 47  | 43  | 38  | 34  | -   | -   | -   | -   | -   | -   |
|                   | 4,5                     | 47  | 45  | 42  | 38  | 34  | 30  | -   | -   | -   | -   | -   | -   | -   |
|                   | 4                       | 40  | 37  | 34  | 30  | 26  | 24  | -   | -   | -   | -   | -   | -   | -   |
| 3                 | 26                      | 23  | 20  | 18  | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |
| 2                 | 16                      | 14  | 12  | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |
| 1                 | 10                      | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |
| <b>MTL-ECM 24</b> | 10                      | 372 | 374 | 378 | 380 | 384 | 385 | 385 | 384 | 382 | 378 | 374 | 367 | 358 |
|                   | 9,5                     | 324 | 328 | 332 | 336 | 338 | 339 | 340 | 340 | 338 | 336 | 332 | 326 | 318 |
|                   | 9                       | 290 | 293 | 297 | 300 | 305 | 306 | 307 | 306 | 304 | 302 | 298 | 293 | 285 |
|                   | 8,5                     | 254 | 254 | 255 | 155 | 256 | 256 | 256 | 256 | 256 | 254 | 253 | 250 | 244 |
|                   | 8                       | 206 | 210 | 212 | 214 | 216 | 220 | 222 | 224 | 228 | 228 | 226 | 224 | 220 |
|                   | 7,5                     | 183 | 183 | 183 | 183 | 184 | 186 | 188 | 189 | 190 | 190 | 190 | 187 | 180 |
|                   | 7                       | 142 | 144 | 146 | 149 | 152 | 156 | 159 | 162 | 163 | 164 | 163 | 161 | 152 |
|                   | 6,5                     | 125 | 127 | 128 | 130 | 132 | 134 | 136 | 136 | 137 | 136 | 133 | 128 | 116 |
|                   | 6                       | 102 | 104 | 105 | 107 | 109 | 112 | 114 | 116 | 116 | 116 | 115 | 110 | 84  |
|                   | 5,5                     | 86  | 87  | 88  | 89  | 91  | 92  | 94  | 95  | 96  | 96  | 92  | 82  | 61  |
|                   | 5                       | 66  | 66  | 68  | 70  | 72  | 74  | 77  | 80  | 80  | 80  | 74  | 53  | -   |
|                   | 4,5                     | 48  | 52  | 56  | 60  | 61  | 63  | 64  | 66  | 66  | 63  | 55  | -   | -   |
|                   | 4                       | 42  | 43  | 44  | 46  | 49  | 52  | 54  | 56  | 55  | 51  | -   | -   | -   |
| 3                 | 25                      | 27  | 29  | 31  | 33  | 35  | 37  | 38  | 38  | -   | -   | -   | -   |     |
| 2                 | 16                      | 17  | 19  | 21  | 22  | -   | -   | -   | -   | -   | -   | -   | -   |     |
| 1                 | 12                      | 13  | 14  | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |
| <b>MTL-ECM 34</b> | 10                      | 542 | 542 | 542 | 542 | 542 | 540 | 538 | 536 | 534 | 533 | 532 | 530 | 530 |
|                   | 9,5                     | 473 | 476 | 480 | 482 | 482 | 482 | 482 | 482 | 480 | 479 | 478 | 478 | 478 |
|                   | 9                       | 424 | 426 | 428 | 429 | 430 | 430 | 429 | 428 | 426 | 425 | 424 | 452 | 423 |
|                   | 8,5                     | 375 | 377 | 380 | 383 | 383 | 383 | 383 | 382 | 382 | 382 | 382 | 382 | 382 |
|                   | 8                       | 337 | 338 | 340 | 340 | 341 | 342 | 342 | 339 | 337 | 338 | 338 | 338 | 340 |
|                   | 7,5                     | 264 | 266 | 272 | 276 | 280 | 282 | 284 | 286 | 288 | 290 | 292 | 294 | 296 |
|                   | 7                       | 220 | 224 | 228 | 232 | 233 | 238 | 240 | 242 | 243 | 246 | 246 | 250 | 252 |
|                   | 6,5                     | 178 | 182 | 186 | 190 | 194 | 197 | 200 | 202 | 204 | 206 | 208 | 211 | 213 |
|                   | 6                       | 144 | 147 | 150 | 153 | 156 | 158 | 160 | 164 | 166 | 170 | 172 | 174 | 176 |
|                   | 5,5                     | 116 | 118 | 120 | 123 | 126 | 129 | 132 | 135 | 137 | 140 | 142 | 144 | 145 |
|                   | 5                       | 85  | 88  | 92  | 94  | 98  | 100 | 103 | 106 | 108 | 111 | 113 | 115 | 117 |
|                   | 4,5                     | 72  | 74  | 76  | 78  | 82  | 84  | 86  | 89  | 92  | 94  | 96  | 97  | 98  |
|                   | 4                       | 54  | 57  | 60  | 63  | 65  | 67  | 69  | 71  | 73  | 75  | 76  | 78  | 80  |
| 3                 | 30                      | 34  | 37  | 39  | 41  | 43  | 44  | 46  | 47  | 48  | -   | -   | -   |     |
| 2                 | 20                      | 21  | 22  | 23  | 24  | 26  | -   | -   | -   | -   | -   | -   | -   |     |
| 1                 | 13                      | 14  | 15  | 16  | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |
| <b>MTL-ECM 44</b> | 10                      | 506 | 516 | 524 | 533 | 536 | 538 | 538 | 536 | 535 | 533 | 530 | 528 | 527 |
|                   | 9,5                     | 536 | 447 | 456 | 462 | 466 | 472 | 474 | 476 | 477 | 476 | 476 | 476 | 475 |
|                   | 9                       | 386 | 395 | 404 | 410 | 418 | 422 | 424 | 426 | 427 | 427 | 427 | 427 | 426 |
|                   | 8,5                     | 330 | 336 | 342 | 347 | 350 | 355 | 358 | 362 | 364 | 366 | 368 | 370 | 372 |
|                   | 8                       | 273 | 279 | 286 | 291 | 296 | 302 | 307 | 311 | 314 | 317 | 320 | 322 | 325 |
|                   | 7,5                     | 226 | 232 | 238 | 244 | 248 | 254 | 257 | 260 | 264 | 267 | 270 | 272 | 275 |
|                   | 7                       | 184 | 186 | 193 | 197 | 203 | 206 | 210 | 214 | 218 | 222 | 226 | 228 | 232 |
|                   | 6,5                     | 155 | 158 | 162 | 164 | 168 | 172 | 176 | 180 | 185 | 189 | 192 | 196 | 200 |
|                   | 6                       | 120 | 124 | 127 | 132 | 136 | 140 | 144 | 148 | 153 | 156 | 160 | 164 | 166 |
|                   | 5,5                     | 100 | 104 | 106 | 111 | 114 | 119 | 122 | 126 | 129 | 132 | 136 | 138 | 140 |
|                   | 5                       | 78  | 82  | 85  | 89  | 93  | 96  | 98  | 102 | 104 | 107 | 110 | 112 | 115 |
|                   | 4,5                     | 70  | 70  | 71  | 73  | 76  | 80  | 82  | 84  | 87  | 89  | 92  | 94  | 96  |
|                   | 4                       | 48  | 51  | 55  | 58  | 60  | 62  | 64  | 66  | 68  | 70  | 72  | 74  | -   |
| 3                 | 30                      | 34  | 36  | 38  | 40  | 41  | 42  | 42  | -   | -   | -   | -   | -   |     |
| 2                 | 18                      | 20  | 22  | 22  | 24  | -   | -   | -   | -   | -   | -   | -   | -   |     |
| 1                 | 12                      | 14  | 14  | -   | -   | -   | -   | -   | -   | -   | -   | -   | -   |     |

Correction factors for Total cooling emission


|                   |      | Available pressure (Pa) |      |      |      |      |      |      |      |      |      |      |      |      |  |
|-------------------|------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| Mod.              | Vdc  | 0                       | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  | 120  |  |
| <b>MTL-ECM 14</b> | 10   | 1,00                    | 0,99 | 0,98 | 0,97 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,86 | 0,84 | 0,81 | 0,77 |  |
|                   | 9,5  | 1,00                    | 0,99 | 0,98 | 0,97 | 0,95 | 0,93 | 0,92 | 0,90 | 0,87 | 0,85 | 0,81 | 0,78 | 0,74 |  |
|                   | 9    | 1,00                    | 0,99 | 0,98 | 0,96 | 0,95 | 0,93 | 0,90 | 0,88 | 0,85 | 0,82 | 0,78 | 0,74 | 0,69 |  |
|                   | 8,5  | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,92 | 0,89 | 0,86 | 0,82 | 0,78 | 0,73 | 0,69 | 0,64 |  |
|                   | 8    | 1,00                    | 0,99 | 0,97 | 0,95 | 0,93 | 0,90 | 0,87 | 0,82 | 0,78 | 0,73 | 0,68 | 0,63 | 0,57 |  |
|                   | 7,5  | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,88 | 0,84 | 0,79 | 0,74 | 0,68 | 0,62 | 0,55 | 0,49 |  |
|                   | 7    | 1,00                    | 0,98 | 0,95 | 0,92 | 0,89 | 0,85 | 0,80 | 0,75 | 0,68 | 0,61 | 0,54 | 0,46 | -    |  |
|                   | 6,5  | 1,00                    | 0,97 | 0,94 | 0,91 | 0,87 | 0,82 | 0,75 | 0,68 | 0,61 | 0,53 | -    | -    | -    |  |
|                   | 6    | 1,00                    | 0,97 | 0,93 | 0,89 | 0,84 | 0,77 | 0,70 | 0,62 | 0,52 | -    | -    | -    | -    |  |
|                   | 5,5  | 1,00                    | 0,96 | 0,92 | 0,87 | 0,80 | 0,72 | 0,62 | 0,51 | -    | -    | -    | -    | -    |  |
|                   | 5    | 1,00                    | 0,95 | 0,90 | 0,83 | 0,75 | 0,63 | 0,51 | -    | -    | -    | -    | -    | -    |  |
|                   | 4,5  | 1,00                    | 0,95 | 0,88 | 0,79 | 0,68 | 0,54 | -    | -    | -    | -    | -    | -    | -    |  |
|                   | 4    | 1,00                    | 0,94 | 0,85 | 0,73 | 0,59 | 0,42 | -    | -    | -    | -    | -    | -    | -    |  |
|                   | 3    | 1,00                    | 0,89 | 0,73 | 0,51 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 2                 | 1,00 | 0,81                    | 0,41 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| 1                 | 1,00 | -                       | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| <b>MTL-ECM 24</b> | 10   | 1,00                    | 0,99 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,96 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 |  |
|                   | 9,5  | 1,00                    | 0,99 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,89 |  |
|                   | 9    | 1,00                    | 0,99 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,90 | 0,88 |  |
|                   | 8,5  | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,90 | 0,89 | 0,86 |  |
|                   | 8    | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,85 |  |
|                   | 7,5  | 1,00                    | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,91 | 0,89 | 0,87 | 0,85 | 0,82 |  |
|                   | 7    | 1,00                    | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,91 | 0,89 | 0,86 | 0,84 | 0,80 |  |
|                   | 6,5  | 1,00                    | 0,98 | 0,97 | 0,96 | 0,94 | 0,93 | 0,91 | 0,89 | 0,87 | 0,85 | 0,82 | 0,77 | 0,70 |  |
|                   | 6    | 1,00                    | 0,98 | 0,97 | 0,96 | 0,94 | 0,92 | 0,91 | 0,88 | 0,86 | 0,83 | 0,79 | 0,74 | 0,61 |  |
|                   | 5,5  | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,91 | 0,89 | 0,86 | 0,83 | 0,79 | 0,72 | 0,62 | 0,40 |  |
|                   | 5    | 1,00                    | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,86 | 0,83 | 0,79 | 0,73 | 0,65 | 0,39 | -    |  |
|                   | 4,5  | 1,00                    | 0,97 | 0,95 | 0,92 | 0,89 | 0,85 | 0,81 | 0,77 | 0,71 | 0,63 | 0,51 | -    | -    |  |
|                   | 4    | 1,00                    | 0,97 | 0,94 | 0,91 | 0,87 | 0,83 | 0,78 | 0,73 | 0,66 | 0,56 | -    | -    | -    |  |
|                   | 3    | 1,00                    | 0,95 | 0,90 | 0,84 | 0,79 | 0,74 | 0,67 | 0,60 | 0,51 | -    | -    | -    | -    |  |
| 2                 | 1,00 | 0,93                    | 0,84 | 0,75 | 0,66 | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| 1                 | 1,00 | 0,88                    | 0,75 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| <b>MTL-ECM 34</b> | 10   | 1,00                    | 0,99 | 0,98 | 0,97 | 0,97 | 0,96 | 0,95 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 |  |
|                   | 9,5  | 1,00                    | 0,99 | 0,99 | 0,98 | 0,97 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,91 |  |
|                   | 9    | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 |  |
|                   | 8,5  | 1,00                    | 0,99 | 0,99 | 0,98 | 0,97 | 0,96 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,89 |  |
|                   | 8    | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,90 | 0,89 | 0,88 |  |
|                   | 7,5  | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,88 | 0,86 |  |
|                   | 7    | 1,00                    | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,86 | 0,84 |  |
|                   | 6,5  | 1,00                    | 0,99 | 0,98 | 0,97 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,85 | 0,83 | 0,81 |  |
|                   | 6    | 1,00                    | 0,98 | 0,97 | 0,95 | 0,94 | 0,92 | 0,90 | 0,88 | 0,86 | 0,84 | 0,82 | 0,80 | 0,78 |  |
|                   | 5,5  | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,92 | 0,89 | 0,87 | 0,85 | 0,82 | 0,80 | 0,78 | 0,76 |  |
|                   | 5    | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,88 | 0,85 | 0,82 | 0,80 | 0,77 | 0,75 | 0,73 | 0,71 |  |
|                   | 4,5  | 1,00                    | 0,98 | 0,96 | 0,93 | 0,90 | 0,86 | 0,84 | 0,81 | 0,78 | 0,75 | 0,73 | 0,70 | 0,68 |  |
|                   | 4    | 1,00                    | 0,97 | 0,93 | 0,89 | 0,86 | 0,82 | 0,79 | 0,76 | 0,73 | 0,70 | 0,67 | 0,65 | 0,62 |  |
|                   | 3    | 1,00                    | 0,95 | 0,89 | 0,83 | 0,78 | 0,73 | 0,69 | 0,65 | 0,61 | 0,57 | -    | -    | -    |  |
| 2                 | 1,00 | 0,91                    | 0,83 | 0,75 | 0,68 | 0,62 | -    | -    | -    | -    | -    | -    | -    |      |  |
| 1                 | 1,00 | 0,85                    | 0,74 | 0,64 | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| <b>MTL-ECM 44</b> | 10   | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 |  |
|                   | 9,5  | 1,00                    | 0,99 | 0,99 | 0,98 | 0,97 | 0,96 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 |  |
|                   | 9    | 1,00                    | 0,99 | 0,99 | 0,98 | 0,97 | 0,96 | 0,96 | 0,95 | 0,94 | 0,92 | 0,92 | 0,91 | 0,90 |  |
|                   | 8,5  | 1,00                    | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,88 |  |
|                   | 8    | 1,00                    | 0,99 | 0,98 | 0,97 | 0,97 | 0,96 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,89 | 0,87 |  |
|                   | 7,5  | 1,00                    | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,87 | 0,85 |  |
|                   | 7    | 1,00                    | 0,99 | 0,98 | 0,97 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,87 | 0,85 | 0,83 |  |
|                   | 6,5  | 1,00                    | 0,99 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,90 | 0,89 | 0,87 | 0,85 | 0,83 | 0,81 |  |
|                   | 6    | 1,00                    | 0,99 | 0,97 | 0,96 | 0,94 | 0,92 | 0,90 | 0,88 | 0,86 | 0,84 | 0,81 | 0,79 | 0,76 |  |
|                   | 5,5  | 1,00                    | 0,98 | 0,97 | 0,95 | 0,93 | 0,91 | 0,88 | 0,86 | 0,83 | 0,81 | 0,78 | 0,75 | 0,73 |  |
|                   | 5    | 1,00                    | 0,98 | 0,96 | 0,94 | 0,91 | 0,89 | 0,86 | 0,83 | 0,80 | 0,77 | 0,74 | 0,71 | 0,68 |  |
|                   | 4,5  | 1,00                    | 0,97 | 0,95 | 0,92 | 0,89 | 0,86 | 0,83 | 0,80 | 0,76 | 0,73 | 0,70 | 0,66 | 0,63 |  |
|                   | 4    | 1,00                    | 0,97 | 0,93 | 0,90 | 0,87 | 0,83 | 0,79 | 0,75 | 0,72 | 0,68 | 0,64 | 0,61 | -    |  |
|                   | 3    | 1,00                    | 0,94 | 0,89 | 0,83 | 0,78 | 0,73 | 0,68 | 0,63 | -    | -    | -    | -    | -    |  |
| 2                 | 1,00 | 0,92                    | 0,84 | 0,76 | 0,67 | -    | -    | -    | -    | -    | -    | -    | -    |      |  |
| 1                 | 1,00 | 0,87                    | 0,77 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |  |

Correction factors for Sensible cooling emission and Heating emission

| Available pressure (Pa) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |   |
|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| Mod.                    | V    | 0    | 10   | 20   | 30   | 40   | 50   | 60   | 70   | 80   | 90   | 100  | 110  | 120  |   |
| <b>MTL-ECM 14</b>       | 10   | 1,00 | 0,99 | 0,97 | 0,96 | 0,94 | 0,92 | 0,90 | 0,88 | 0,85 | 0,83 | 0,79 | 0,76 | 0,72 |   |
|                         | 9,5  | 1,00 | 0,99 | 0,97 | 0,95 | 0,93 | 0,91 | 0,89 | 0,86 | 0,84 | 0,80 | 0,77 | 0,73 | 0,69 |   |
|                         | 9    | 1,00 | 0,98 | 0,97 | 0,95 | 0,93 | 0,90 | 0,88 | 0,85 | 0,81 | 0,77 | 0,73 | 0,68 | 0,63 |   |
|                         | 8,5  | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,86 | 0,82 | 0,78 | 0,73 | 0,68 | 0,63 | 0,58 |   |
|                         | 8    | 1,00 | 0,98 | 0,96 | 0,94 | 0,91 | 0,87 | 0,83 | 0,78 | 0,73 | 0,67 | 0,62 | 0,56 | 0,50 |   |
|                         | 7,5  | 1,00 | 0,98 | 0,95 | 0,92 | 0,88 | 0,84 | 0,79 | 0,74 | 0,68 | 0,62 | 0,55 | 0,49 | 0,42 |   |
|                         | 7    | 1,00 | 0,97 | 0,94 | 0,90 | 0,86 | 0,81 | 0,75 | 0,69 | 0,62 | 0,55 | 0,47 | 0,40 | -    | - |
|                         | 6,5  | 1,00 | 0,96 | 0,93 | 0,88 | 0,83 | 0,77 | 0,70 | 0,62 | 0,54 | 0,46 | -    | -    | -    | - |
|                         | 6    | 1,00 | 0,96 | 0,91 | 0,86 | 0,79 | 0,72 | 0,64 | 0,55 | 0,45 | -    | -    | -    | -    | - |
|                         | 5,5  | 1,00 | 0,95 | 0,89 | 0,83 | 0,75 | 0,66 | 0,56 | 0,45 | -    | -    | -    | -    | -    | - |
|                         | 5    | 1,00 | 0,94 | 0,87 | 0,79 | 0,69 | 0,57 | 0,44 | -    | -    | -    | -    | -    | -    | - |
|                         | 4,5  | 1,00 | 0,93 | 0,84 | 0,74 | 0,61 | 0,47 | -    | -    | -    | -    | -    | -    | -    | - |
|                         | 4    | 1,00 | 0,92 | 0,81 | 0,68 | 0,52 | 0,36 | -    | -    | -    | -    | -    | -    | -    | - |
|                         | 3    | 1,00 | 0,86 | 0,67 | 0,45 | -    | -    | -    | -    | -    | -    | -    | -    | -    | - |
| 2                       | 1,00 | 0,76 | 0,35 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |   |
| 1                       | 1,00 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |   |
| <b>MTL-ECM 24</b>       | 10   | 1,00 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,90 | 0,89 | 0,87 |   |
|                         | 9,5  | 1,00 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,86 |   |
|                         | 9    | 1,00 | 0,99 | 0,98 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,85 |   |
|                         | 8,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,85 | 0,83 |   |
|                         | 8    | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,90 | 0,88 | 0,86 | 0,84 | 0,81 |   |
|                         | 7,5  | 1,00 | 0,98 | 0,97 | 0,96 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,86 | 0,84 | 0,81 | 0,77 |   |
|                         | 7    | 1,00 | 0,99 | 0,97 | 0,96 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,85 | 0,83 | 0,80 | 0,75 |   |
|                         | 6,5  | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,90 | 0,88 | 0,86 | 0,84 | 0,81 | 0,77 | 0,72 | 0,64 |   |
|                         | 6    | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,90 | 0,88 | 0,85 | 0,82 | 0,78 | 0,75 | 0,68 | 0,54 |   |
|                         | 5,5  | 1,00 | 0,98 | 0,96 | 0,93 | 0,91 | 0,88 | 0,85 | 0,82 | 0,78 | 0,74 | 0,66 | 0,55 | 0,33 |   |
|                         | 5    | 1,00 | 0,98 | 0,95 | 0,92 | 0,89 | 0,86 | 0,82 | 0,78 | 0,73 | 0,67 | 0,58 | 0,32 | -    |   |
|                         | 4,5  | 1,00 | 0,97 | 0,93 | 0,89 | 0,85 | 0,81 | 0,76 | 0,71 | 0,65 | 0,57 | 0,44 | -    | -    |   |
|                         | 4    | 1,00 | 0,96 | 0,92 | 0,88 | 0,84 | 0,79 | 0,73 | 0,67 | 0,60 | 0,49 | -    | -    | -    |   |
|                         | 3    | 1,00 | 0,93 | 0,87 | 0,80 | 0,75 | 0,68 | 0,61 | 0,54 | 0,45 | -    | -    | -    | -    |   |
| 2                       | 1,00 | 0,91 | 0,80 | 0,69 | 0,60 | -    | -    | -    | -    | -    | -    | -    | -    |      |   |
| 1                       | 1,00 | 0,85 | 0,70 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |   |
| <b>MTL-ECM 34</b>       | 10   | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,89 | 0,87 |   |
|                         | 9,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,89 | 0,88 |   |
|                         | 9    | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,89 | 0,88 | 0,87 |   |
|                         | 8,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,89 | 0,88 | 0,86 |   |
|                         | 8    | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,86 | 0,84 |   |
|                         | 7,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,94 | 0,93 | 0,91 | 0,90 | 0,88 | 0,86 | 0,84 | 0,83 |   |
|                         | 7    | 1,00 | 0,99 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,90 | 0,88 | 0,86 | 0,84 | 0,82 | 0,80 |   |
|                         | 6,5  | 1,00 | 0,98 | 0,97 | 0,96 | 0,94 | 0,92 | 0,90 | 0,88 | 0,85 | 0,83 | 0,81 | 0,79 | 0,77 |   |
|                         | 6    | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,87 | 0,84 | 0,82 | 0,79 | 0,77 | 0,75 | 0,73 |   |
|                         | 5,5  | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,89 | 0,86 | 0,83 | 0,80 | 0,78 | 0,75 | 0,73 | 0,70 |   |
|                         | 5    | 1,00 | 0,97 | 0,94 | 0,91 | 0,87 | 0,84 | 0,81 | 0,77 | 0,75 | 0,72 | 0,70 | 0,67 | 0,65 |   |
|                         | 4,5  | 1,00 | 0,98 | 0,94 | 0,91 | 0,86 | 0,83 | 0,80 | 0,76 | 0,73 | 0,70 | 0,67 | 0,64 | 0,62 |   |
|                         | 4    | 1,00 | 0,95 | 0,91 | 0,86 | 0,82 | 0,78 | 0,74 | 0,70 | 0,67 | 0,64 | 0,61 | 0,59 | 0,56 |   |
|                         | 3    | 1,00 | 0,93 | 0,86 | 0,79 | 0,73 | 0,67 | 0,63 | 0,59 | 0,55 | 0,50 | -    | -    | -    |   |
| 2                       | 1,00 | 0,89 | 0,78 | 0,70 | 0,62 | 0,55 | -    | -    | -    | -    | -    | -    | -    |      |   |
| 1                       | 1,00 | 0,81 | 0,68 | 0,58 | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |   |
| <b>MTL-ECM 44</b>       | 10   | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,89 | 0,88 |   |
|                         | 9,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,91 | 0,90 | 0,89 | 0,87 |   |
|                         | 9    | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,93 | 0,92 | 0,89 | 0,89 | 0,88 | 0,86 |   |
|                         | 8,5  | 1,00 | 0,99 | 0,98 | 0,97 | 0,96 | 0,95 | 0,94 | 0,92 | 0,91 | 0,90 | 0,88 | 0,87 | 0,85 |   |
|                         | 8    | 1,00 | 0,99 | 0,98 | 0,97 | 0,95 | 0,94 | 0,93 | 0,91 | 0,90 | 0,89 | 0,87 | 0,85 | 0,84 |   |
|                         | 7,5  | 1,00 | 0,99 | 0,97 | 0,96 | 0,95 | 0,93 | 0,92 | 0,90 | 0,89 | 0,87 | 0,85 | 0,83 | 0,81 |   |
|                         | 7    | 1,00 | 0,98 | 0,97 | 0,96 | 0,94 | 0,92 | 0,91 | 0,89 | 0,87 | 0,85 | 0,83 | 0,81 | 0,79 |   |
|                         | 6,5  | 1,00 | 0,98 | 0,97 | 0,95 | 0,93 | 0,91 | 0,89 | 0,87 | 0,85 | 0,83 | 0,81 | 0,78 | 0,76 |   |
|                         | 6    | 1,00 | 0,98 | 0,96 | 0,94 | 0,92 | 0,90 | 0,87 | 0,85 | 0,82 | 0,80 | 0,77 | 0,74 | 0,71 |   |
|                         | 5,5  | 1,00 | 0,98 | 0,96 | 0,93 | 0,91 | 0,88 | 0,85 | 0,82 | 0,79 | 0,76 | 0,73 | 0,70 | 0,67 |   |
|                         | 5    | 1,00 | 0,97 | 0,95 | 0,91 | 0,88 | 0,86 | 0,82 | 0,79 | 0,75 | 0,72 | 0,68 | 0,65 | 0,62 |   |
|                         | 4,5  | 1,00 | 0,97 | 0,93 | 0,90 | 0,86 | 0,82 | 0,78 | 0,75 | 0,71 | 0,67 | 0,64 | 0,60 | 0,57 |   |
|                         | 4    | 1,00 | 0,96 | 0,91 | 0,87 | 0,83 | 0,78 | 0,74 | 0,70 | 0,66 | 0,62 | 0,58 | 0,54 | -    |   |
|                         | 3    | 1,00 | 0,93 | 0,85 | 0,79 | 0,73 | 0,67 | 0,62 | 0,57 | -    | -    | -    | -    | -    |   |
| 2                       | 1,00 | 0,89 | 0,79 | 0,70 | 0,61 | -    | -    | -    | -    | -    | -    | -    | -    |      |   |
| 1                       | 1,00 | 0,84 | 0,71 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |      |   |




2 pipe units

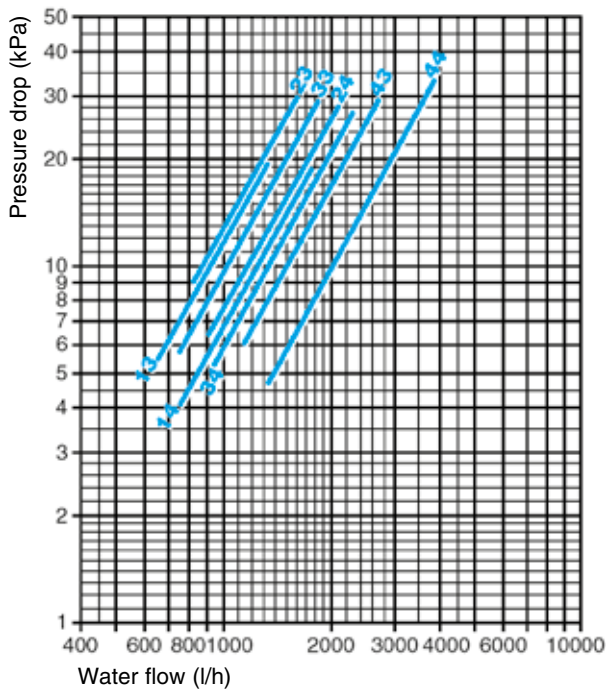

The water pressure drop figures refer to a mean water temperature of **10°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.

| °C       | 20   | 30   | 40   | 50   | 60   | 70   | 80   |
|----------|------|------|------|------|------|------|------|
| <b>K</b> | 0,94 | 0,90 | 0,86 | 0,82 | 0,78 | 0,74 | 0,70 |

4 pipe units  
(heating coil pressure drop)

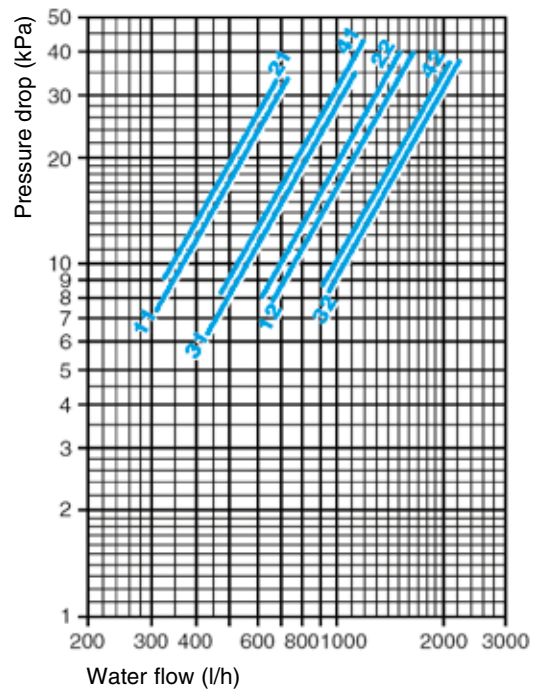


The water pressure drop figures refer to a mean water temperature of **60°C**; for different temperatures, multiply the pressure drop figures by the correction factors **K**.


| °C       | 40   | 50   | 70   | 80   |
|----------|------|------|------|------|
| <b>K</b> | 1,12 | 1,06 | 0,94 | 0,88 |

Accessory air side pressure drop

Spigot plenum pressure drop

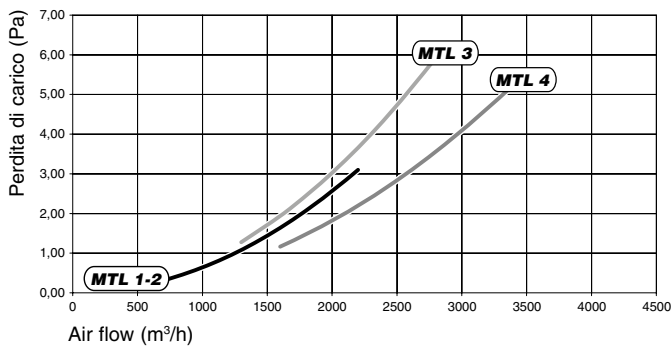

48 mm G3 filter pressure drop

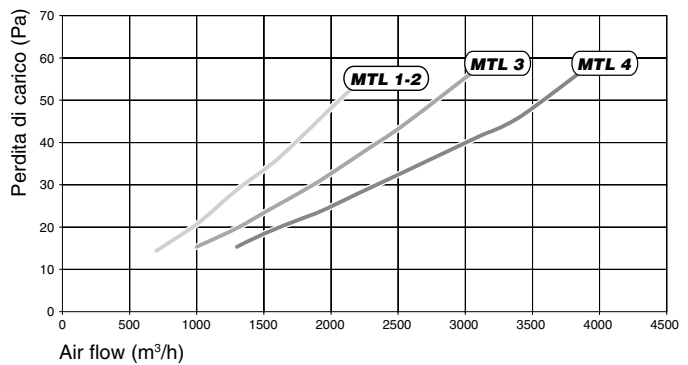

| IDENTIFICATION | CODE    |
|----------------|---------|
| WM-AU          | 9066632 |



Dimensions: 135x86x24 mm

The control must always be connected with UPO-AU power unit (to be ordered separately).

- ON-OFF switch.
- Manual, automatic or centralized Summer/Winter switch.
- Manual or automatic 3 speed progressive switch.
- Summer/Winter/Fan/Auto mode switch.
- Electronic room thermostat for fan control (ON-OFF).
- Electronic room thermostat for valve control (ON-OFF).
- Simultaneous thermostatic control of the valves and fan.
- It allows to control the low temperature cut-out thermostat (NTC).
- Energy saving switch.
- Presence of a LED signal when the thermostat is on.

Control power absorption: see the UPO-AU power unit

| IDENTIFICATION | CODE     |
|----------------|----------|
| T-MB           | 9066331E |



Dimensions: 110x72x25 mm

The control must always be connected with UPO-AU power unit (to be ordered separately).

Wall control with display that allows controlling one or more units in Master/Slave mode. The control is equipped with internal sensor to detect the room temperature, which can be defined as a priority compared to the return air sensor on the fan coil.

The T-MB control features the following functions:

- Switch the unit ON and OFF.
- Temperature set.
- Manual, centralized or automatic Summer/Winter switch.
- Set the fan speed (low, medium, high or autofan).
- Set the operation mode (fan only, cooling, heating, auto).
- Possibility of use of the low temperature cut-out thermostat NTC mounted on the UPO-AU power unit.
- Time setting.
- Weekly ON/OFF program.

Control power absorption: see the UPO-AU power unit

| DESCRIPTION                                                                          | IDENTIFICATION | CODE    |
|--------------------------------------------------------------------------------------|----------------|---------|
| Power unit for WM-AU and T-MB remote controls for all units, not fitted on the unit. | UPO1-AU        | 9034169 |



Power unit to be installed on the fan coil (fan coil interface).

- It controls the fan and the valves of the fan coil.
- It is connected to the electric supply.
- It receives the information required from the control.
- Possibility of use of the low temperature cut-out thermostat NTC:
  - T1 function for the return air control.
  - T2 function which controls the summer/winter switch.
  - T3 function as low temperature cut-out thermostat.
- It allows to control up to 10 units (1 master and 9 slaves).
- Max. Network length: 100 meters.
- Max cable length between control and first connected power unit: 20 meters.

Control power absorption: 2,3 VA



### NTC low temperature cut-out thermostat

To be fitted between the coil fins; when connecting the control, the NTC probe cable must be separated from the power supply wires.

To be used only with WM-TQR control and the UPO-AU power-unit.

It stops the fan when the water temperature is lower than 28°C and it starts the fan when is higher than 33°C.

To use as:

- T1 function for the return air control.
- T2 function which controls the summer/winter switch.
- T3 function as low temperature cut-out thermostat.

| IDENTIFICATION | CODE    |
|----------------|---------|
| NTC            | 3021090 |



All the **Maestro MTL** units can be supplied with a wide range of controls, which allows managing one single unit or several units by using the **Modbus RTU - RS 485**. Units can be managed according to the Master/Slave logic (up to 20 units) or by supervisory components. The system consists in a **QCV-MB** board with **T-MB** included wall control and a series of controls, such as the **PSM-DI** multifunction control and the **Sabianet** supervisory program.

**To be used with valves with 3 points – 24 Volt actuator or with ON/OFF 230 V valves**

### **QCV-MB control board**

| <b>DESCRIPTION</b>                                                                                                                                                | <b>IDENTIFICATION</b> | <b>CODE</b> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------|
| <i>MB version control board for MTL sizes 1÷6 and MTL-ECM sizes 1÷4, fitted on the unit (it can be used with 24V - 3 points valve or 230V ON-OFF valves).</i>     | QCV-MB-M 1-6          | 9034150     |
| <i>MB version control board for MTL size 7 only, fitted on the unit (it can be used with 24V - 3 points valve or 230V ON-OFF valves).</i>                         | QCV-MB-M 7            | 9034157     |
| <i>MB version control board for MTL sizes 1÷6 and MTL-ECM sizes 1÷4, not fitted on the unit (it can be used with 24V - 3 points valve or 230V ON-OFF valves).</i> | QCV-MB-S 1-6          | 9034140     |
| <i>MB version control board for MTL size 7 only, not fitted on the unit (it can be used with 24V - 3 points valve or 230V ON-OFF valves).</i>                     | QCV-MB-S 7            | 9034147     |

The **QCV-MB** electronic board is set to carry out different functions and adjustment modes, in order to meet the installation requirements. These modes are selected by setting the configuration dip switches on the board.

- 2/4 pipe system.
- Fan ON/OFF thermostatic control.
- Valve thermostatic control and continuous ventilation.
- Valve and simultaneous ventilation thermostatic control.
- Fan operation control depending on the coil temperature (cut-out T3 probe fitted), which can be activated only in heating mode or heating and cooling mode.
- Automatic switch of the operating mode by means of T2 water probe (optional) applied on the 2 pipe system.
- Seasonal switch by means of remote contact.
- ON/OFF of the fan coil by means of the remote contact (window or clock contact).
- Electric heater control.

By activating the cut-out T3 probe function, the fan is stopped in winter when the coil temperature is lower than 32°C and started when the temperature reaches 36°C. In summer mode, the fan stops when the temperature inside the coil exceeds 22°C and starts when it drops below 18°C.

The following connections are located on the power board:

- T-MB wall control.
- RS 485 serial connection to manage several fan coils in Master/Slave configuration or to create a supervisory network.

### **T-MB wall control (included with the QCV-MB control board)**

Wall control with display that allows controlling one or more units in Master/Slave mode. The control is equipped with internal sensor to detect the room temperature, which can be defined as a priority compared to the return air sensor on the fan coil. The **T-MB** control features the following functions:

- Switch the appliance ON and OFF.
- Temperature set.
- Modify the set point (when used as a +/- 3° variation of the set point configured from Sabianet supervisory program or PSM-DI).
- Set the fan speed (low, medium, high or autofan).
- Set the operation mode (fan only, cooling, heating; auto for 4 pipe systems with mode selection depending on the air temperature).
- Time setting.
- Weekly ON/OFF program.
- Display and change of the fan coil operation parameters.



Dimensions: 110x72x25 mm

A group of **Maestro MTL** units with **QCV-MB** control board can be connected via a serial link and can consequently be managed at the same time by just one **T-MB** wall control. Using the special jumper present on the board, one unit must be configured as the master, and all the others as slaves.

**With T-MB wall control**


**One control for each unit**

(MAXIMUM LENGTH OF THE CONNECTION CABLE = 20 m)



**One control for more units (20 units max.)**


(MAXIMUM TOTAL LENGTH OF THE CONNECTION CABLE = 800 m)

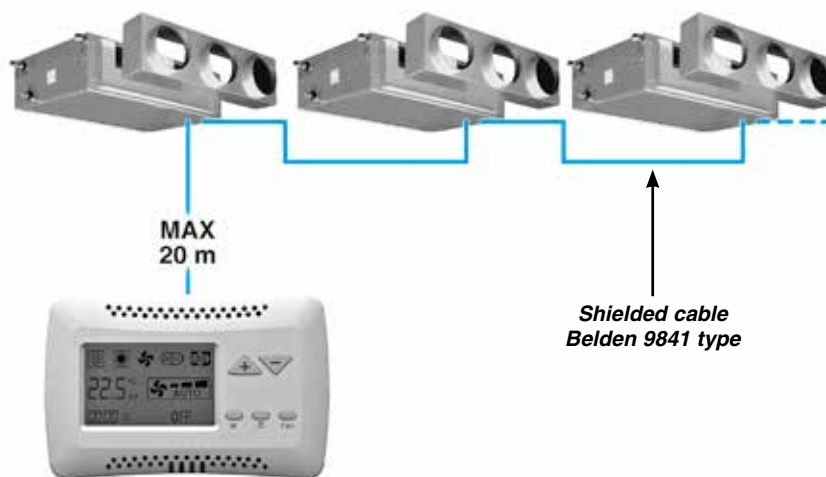

**T2 accessory for units with QCV-MB control board**

| IDENTIFICATION | CODE    |
|----------------|---------|
| T2             | 9025310 |

The T2 sensor can be combined with MB boards to be placed on the water supply pipe upstream 3 way valves (not to be used with 2 way valve).

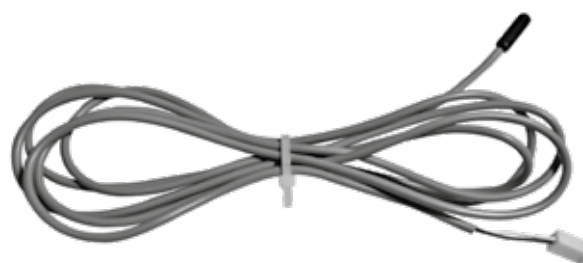

The T2 sensor must be used as described below:


- Change-Over for 2-pipe system for the automatic switch of the operating mode.  
If water temperature is lower than 20°C, cooling mode is set; on the other hand, if water temperature exceeds 30°C, heating mode is set.
- It can be used on units with electric heater and hot water supply. The T2 priority probe activates the electric heater or water valve, depending on the water temperature detected. If water temperature exceeds 34°C, the water valve ON-OFF control is activated; on the other hand, if water temperature is lower than 30°C, the electric heater is activated.

**PSM-DI multifunction control panel**

| DESCRIPTION                                                       | IDENTIFICATION | CODE    |
|-------------------------------------------------------------------|----------------|---------|
| Multifunction control (to be used with QCV-MB control board only) | PSM-DI         | 3021293 |

Another option available for the serial communication between the units is the possibility to connect up to 60 **Maestro MTL** units in series and manage them with just one wall mounted **PSM-DI** controller. The wall mounted controller can be used to set the operating mode for each individual unit connected, display the operating conditions of each individual unit, and set the ON/OFF time sets for each day of the week (the program can be set for all the units and for a maximum of ten groups of units).

If more than 60 units need to be connected, two or more control panels must be used. Each unit must have a MB board. The **PSM-DI** control is used to manage a series of fan coils, up to a maximum of 60 units (the maximum length of the RS 485 connection cable must not exceed 800 m), from one single control point.

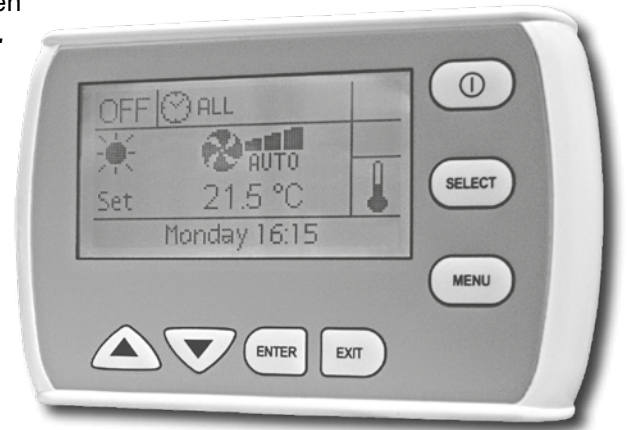

The **PSM-DI** control communicates via a serial line with all the units connected, with the possibility of controlling them all together or individually. In fact, the unique address of each individual fan coil means that all the units can be called at the same time, or the individual unit called, to perform the following functions:

- display the current operating mode, the fan speed, the set point;
- display the room temperature measured on the individual unit;
- turn all the units ON and OFF at the same time or alternatively each unit individually;
- change the operating mode (fan only, heating, cooling, automatic changeover);
- change the set point;
- modify the values and operation parameters of the fan speed.

Each function can then be sent to all the units connected, or alternatively to each individual unit.

Different set points or operating modes can be set for each individual unit.

The **PSM-DI** panel can also be used for the time management of the units over the week. Four ON times and four OFF times can be set on the units for each day of the week. A different temperature set that will be considered as Operation set for all connected appliances, can be set for each event. If the temperature set is not entered for the individual event, it must be set during programming for each individual unit or for the entire network.

***The PSM-DI panel cannot be used together with the Sabianet management program (see next page).***

**Notes:**

- set the Dip Switches of each fan coil as illustrated in the installation manual, based on the required solutions.
- it is possible to connect only one SIOS board per each PSM-DI control panel.
- about "Priority pump function": when just one unit calls for, the relay RL1 on the SIOS board is automatically activated to connect a hot water pump.
- the RS 485 network's overall length must not exceed 700/800 metres.

**Sabianet program for managing a network of Sabiana MB fan coils**

| DESCRIPTION                                                                      | IDENTIFICATION | CODE    |
|----------------------------------------------------------------------------------|----------------|---------|
| Hardware/software supervisory system (to be used with QCV-MB control board only) | Sabianet       | 9079118 |

**Sabianet** is a centralised control system for networks of Sabiana MB fan coils, based on software that runs on LINUX™ operating system (the program is provided pre-installed on a PC) and it works in a “stand alone” way, as an ordinary computer, so that it can be connected to a monitor, to a mouse and to a keyboard. By connecting an Ethernet cable is instead possible to work at a distance and visualize the entire program setting-up through whatever browsers. The **Sabianet** software offers a practical and economical solution for managing the units, with the simple click of the mouse.



The main characteristics include:

- simplicity of use;
- an extremely complete and functional weekly program;
- possibility to access the historical operating data for each individual unit connected;
- possibility to save automatically every 6 h the data on SD support and to force the saving with a switch;
- possibility of data saving also on other items, as for example USB key;
- visualization of the saved configuration on a new ASUS PC.

The program can be used to:

- Create uniform groups (groups of units on individual floors, in offices or rooms).
- Save weekly programs configured for different types of operation (summer, winter, mid seasons, closing periods etc.); these can then be recalled and activated with a simple click of the mouse. Weekly on/off cycles can be set for individual units or groups of units.
- Set the operating conditions for each individual unit or groups of units (operating mode, fan speed, temperature setting).
- Set the set point limits for each individual unit or groups of units.
- Switch each individual unit or groups of units ON or OFF.


The main program screen can display and interact with the entire network of units. An individual unit, a group of units or the entire network can be called so as to make modifications to the operating mode and the set point. The user can then check the operating status of each individual unit, read the room temperature, the coil temperature and the operating status of the condensate drain pump or any alarms.

“MONITORING” SCREEN



## Displaying a unit

The “**MONITORING**” SCREEN shows the units that are connected to the network and scanned by the program.

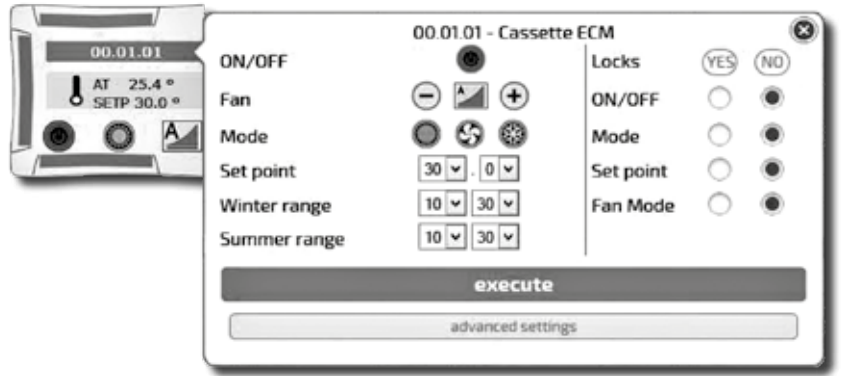

The icon of the terminal unit provides the following information:

- Unit name (**00.01.01**)
- Set temperature (SETP)
- Room temperature (AT)
- Unit status: ON (Green) or OFF (Red)
- Mode:
  - Summer
  - Winter
  - Auto
  - Fan only
- Fan speed:
  - Low
  - Medium
  - High
  - AutoFan

The “**Weekly Program**” can be used to set the unit operating parameters for each day of the week. Several weekly programs can be set.


Time bands are available for each day of the week. The time and the type of operation to be performed by the unit can be set for each band. The time and the operating parameters can then be displayed before being sent to the unit and implemented.

“EVENT MANAGEMENT” SCREEN



## Displaying of the parameters and Dip Switches set up

Every time that the reading of the set up Dip Switches results not easy (as for example by the false ceiling installations), it is always possible to display them directly through the Sabianet program.

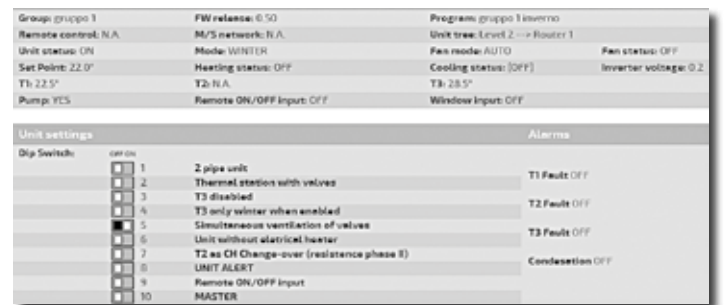


## Alarm control by E-mail and sms

In addition to the alarm set on the Sabianet display, it is possible to send the ON-OFF alarm notification via E-mail and sms.



**PC Sabianet Software**


**Connection  
of a Maestro MTL network  
with QCV-MB control board**

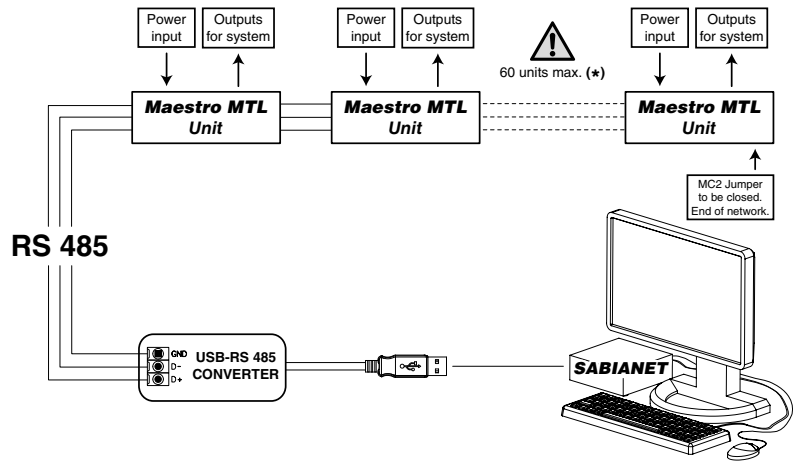

(\*) In the event of more than 60 units, add one or more Router-S (see below).

**RS 485 serial connection cable**

**Shielded cable to be used:**  
Belden 9841, RS-485, 1x2x24 AWG SFTP, 120 Ohm



**PSM-DI and Sabianet electronic boards**

| IDENTIFICATION | CODE    |
|----------------|---------|
| SIOS           | 3021292 |

SIOS is a board equipped with 8 relays with potential free contact to control the activation or deactivation of remote electric utilities. Moreover, the board has 8 digital inlets to display the actuators or external consents, such as motor or other.

The SIOS boards can be connected:

- inside a network managed by Sabianet;
- to a PSM-DI panel (one SIOS for each PSM-DI panel).



| IDENTIFICATION | CODE    |
|----------------|---------|
| Router-S       | 3021290 |

The Router-S is an electronic board that allows to control several units inside a network managed by Sabianet (default) or within a sub-network managed by BMS systems, that are not provided by SABIANA (it is necessary to operate on a Dip Switch on the board).



**Managed by Sabianet**

The Router-S in the standard version is an electronic board that:

- allows creating networks with more than 60 units (minimum 2 Router-S are required) or to divide the network (per floor, building, etc.);
- allows creating a Master/Slave sub-network to be controlled as an independent group.

The number of Router-S to be used is:


- up to 60 units: no Router-S
- from 61 to 120 units: 2 Router-S
- every 60 subsequent units: 1 additional Router-S

**Managed by BMS Systems which are not provided by SABIANA**

The Router-S becomes an electronic board to use with BMS systems not supplied by SABIANA, only after having set the Dip Switch on the board and so creating a Master/Slave sub-network to be controlled as an independent group.

- The number of Router-S to use is:
- maximum 14 Router-S
  - maximum 15 Fan Coils per Router-S

**BCM** External auxiliary condensate collection tray

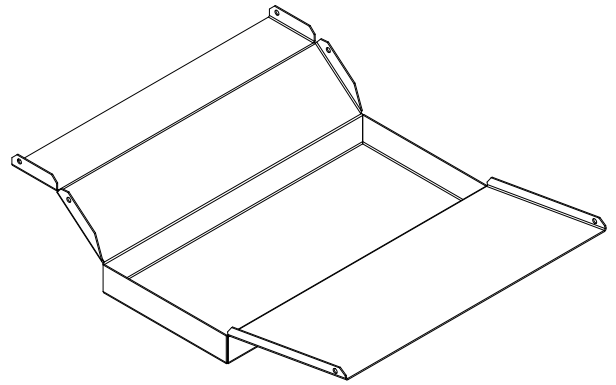

| MODEL | Code    |
|-------|---------|
| ALL   | 9034029 |


**SFM** G3 synthetic filter

The filter is a washable synthetic fibre, flame-proof according to Class F1 DIN 53438.

Efficiency of 84%, Eurovent EU3.

The filter is supplied as an accessory and must be fitted on the unit on site in place of the standard filter.

| MODEL        |                  | A  | B   | C    | Code    |
|--------------|------------------|----|-----|------|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 48 | 285 | 1000 | 6034050 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 48 | 285 | 1000 | 6034050 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 48 | 335 | 988  | 6034052 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 48 | 335 | 1298 | 6034053 |
| <b>MTL 5</b> |                  | 48 | 410 | 1298 | 6034054 |
| <b>MTL 6</b> |                  | 48 | 460 | 1385 | 6034056 |
| <b>MTL 7</b> |                  | 48 | 560 | 1385 | 6034057 |

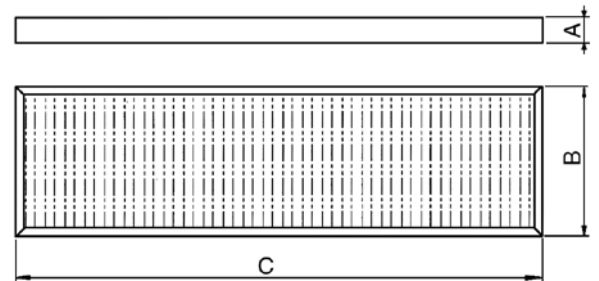


**SFM** F6 synthetic filter

High efficiency compact filter in glass microfiber paper, Class F6 in according to EN779.

The filter is supplied as an accessory and must be fitted on the unit on site in place of the standard filter.

| MODEL        | A  | B   | C    | Code    |
|--------------|----|-----|------|---------|
| <b>MTL 6</b> | 98 | 460 | 1385 | 6034197 |
| <b>MTL 7</b> | 98 | 560 | 1385 | 6034198 |

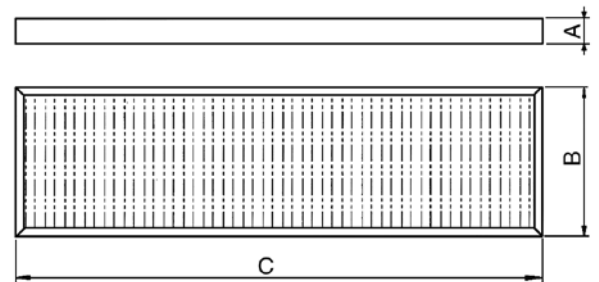


**PMM** Intake/supply spigot plenum

Intake/supply spigot plenum

with 3 spigots (Sizes 1-2-3) or 4 spigots (Sizes 4-5-6-7).


| MODEL        |                  | A    | B   | C   | N° Spigots | Ø Spigots | Code    |
|--------------|------------------|------|-----|-----|------------|-----------|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 1133 | 182 | 298 | 3          | 250       | 9034200 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 1133 | 182 | 298 | 3          | 250       | 9034200 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 1133 | 182 | 348 | 3          | 250       | 9034220 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 1445 | 300 | 348 | 4          | 250       | 9034230 |
| <b>MTL 5</b> |                  | 1445 | 300 | 442 | 4          | 300       | 9034240 |
| <b>MTL 6</b> |                  | 1535 | 300 | 472 | 4          | 355       | 9034280 |
| <b>MTL 7</b> |                  | 1535 | 300 | 572 | 4          | 355       | 9034290 |

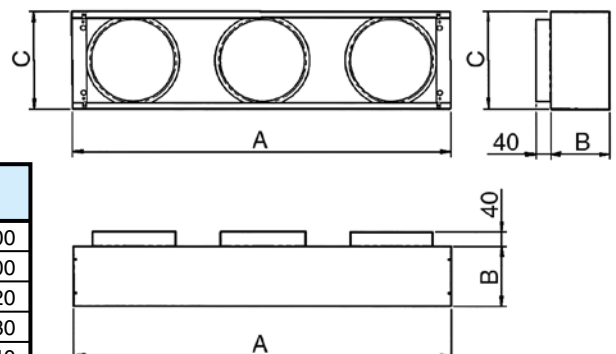

**GAV Antivibrating connection**



Intake/supply antivibrating connection, made of two galvanized frames and a PVC flexible connection.

| MODEL        |                  | A    | B   | Code    |
|--------------|------------------|------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 1138 | 296 | 6034200 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 1138 | 296 | 6034200 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 1138 | 346 | 6034201 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 1450 | 346 | 6034202 |
| <b>MTL 5</b> |                  | 1450 | 421 | 6034203 |
| <b>MTL 6</b> |                  | 1540 | 461 | 6034204 |
| <b>MTL 7</b> |                  | 1540 | 561 | 6034205 |

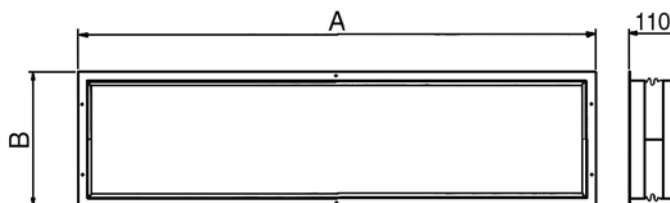

### BEM Electric heater

The **BEM** electric coil consists of electric resistances and a security thermostat, which are inside a galvanized steel and insulated casing.

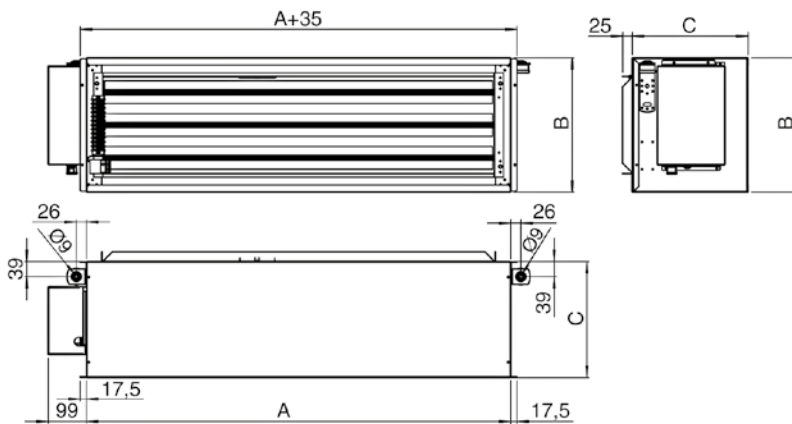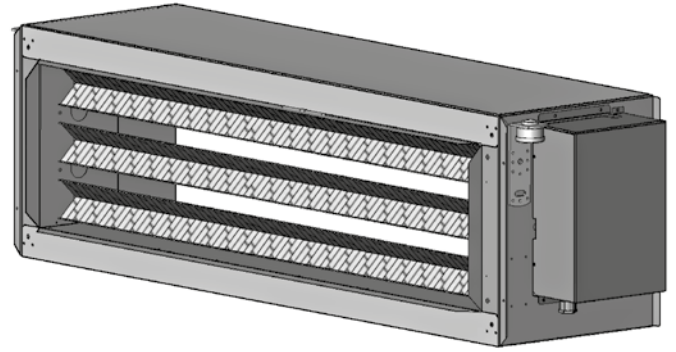

| MODEL        |                  | A    | B   | C   | WATT  | V   | Code    |
|--------------|------------------|------|-----|-----|-------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 1098 | 297 | 300 | 3000  | 230 | 9034201 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 1098 | 297 | 300 | 4500  | 230 | 9034210 |
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 1098 | 297 | 300 | 3000  | 400 | 9034202 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 1098 | 297 | 300 | 4500  | 400 | 9034211 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 1098 | 347 | 300 | 7500  | 400 | 9034222 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 1410 | 347 | 300 | 7500  | 400 | 9034232 |
| <b>MTL 5</b> |                  | 1410 | 422 | 300 | 15000 | 400 | 9034242 |
| <b>MTL 6</b> |                  | 1500 | 472 | 300 | 15000 | 400 | 9034204 |
| <b>MTL 7</b> |                  | 1500 | 572 | 300 | 15000 | 400 | 9034205 |

### Electronic wall controls for **BEM** Electric heater (optional)

#### For MTL models

|               |                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>WM-TQR</b> | 3 speed control with electronic thermostat and centralized/manual summer/winter switch                                  |
| <b>WM-AU</b>  | Automatic speed control with electronic thermostat and summer/winter switch<br>(to be used with UPOM-AU or UPO-AU only) |
| <b>T-MB</b>   | Wall control (to be used with UPOM-AU or UPO-AU only)                                                                   |

#### For MTL-ECM models

|              |                                                                                                                         |
|--------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>WM-AU</b> | Automatic speed control with electronic thermostat and summer/winter switch<br>(to be used with UPOM-AU or UPO-AU only) |
| <b>T-MB</b>  | Wall control (to be used with UPOM-AU or UPO-AU only)                                                                   |

For more details about the controls, see the related pages within this document.

**TO BE USED ONLY WITH QCV-MB CONTROL BOARD**


**24 V  
main coil kit valve**

1" Valve  
with 3 points - 24 Volt actuator \*





| MODEL        |                  | H  | L   | Ø Connections | Kvs | Code    |
|--------------|------------------|----|-----|---------------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 54 | 245 | 1"            | 6,3 | 9034250 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 54 | 245 | 1"            | 6,3 | 9034251 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 54 | 295 | 1"            | 6,3 | 9034251 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 58 | 291 | 1"            | 10  | 9034252 |
| <b>MTL 5</b> |                  | 58 | 367 | 1"            | 10  | 9034252 |
| <b>MTL 6</b> |                  | 59 | 416 | 1"            | 10  | 9034270 |
| <b>MTL 7</b> |                  | 59 | 516 | 1"            | 10  | 9034272 |

**Left connections (standard)**

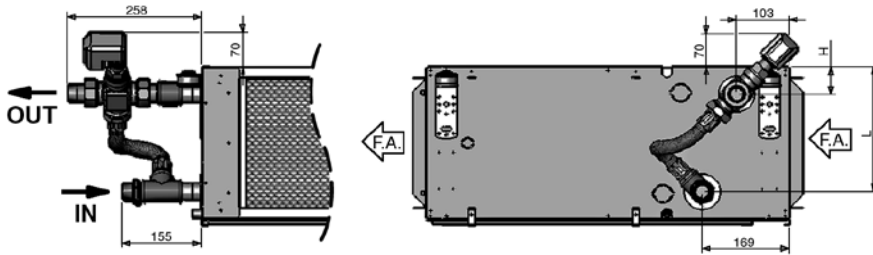

**Right connections (on request)**

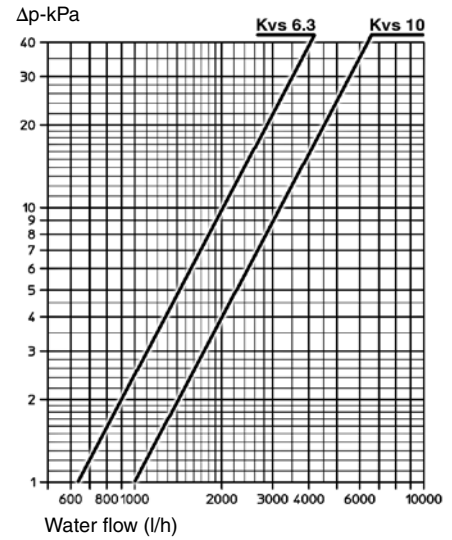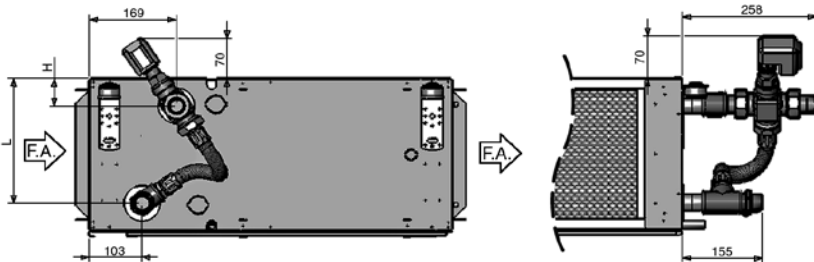


**24 V  
auxiliary coil kit valve**

1" Valve  
with 3 points - 24 Volt actuator \*





| MODEL        |                  | M  | N   | Ø Connections | Kvs | Code    |
|--------------|------------------|----|-----|---------------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 50 | 249 | 1"            | 6,3 | 9034253 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 50 | 249 | 1"            | 6,3 | 9034253 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 50 | 299 | 1"            | 6,3 | 9034253 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 54 | 295 | 1"            | 10  | 9034254 |
| <b>MTL 5</b> |                  | 54 | 370 | 1"            | 10  | 9034254 |
| <b>MTL 6</b> |                  | 55 | 421 | 1"            | 10  | 9034271 |
| <b>MTL 7</b> |                  | 55 | 521 | 1"            | 10  | 9034273 |

**Left connections (standard)**

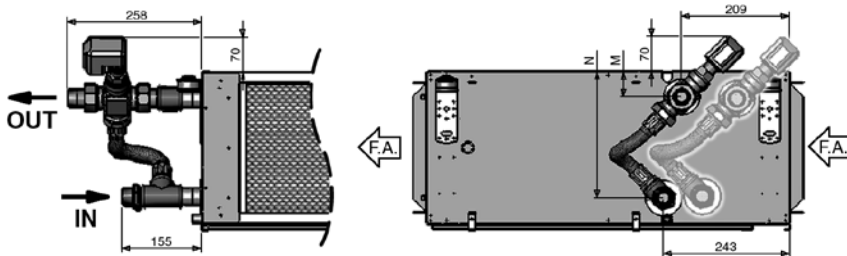

**Right connections (on request)**

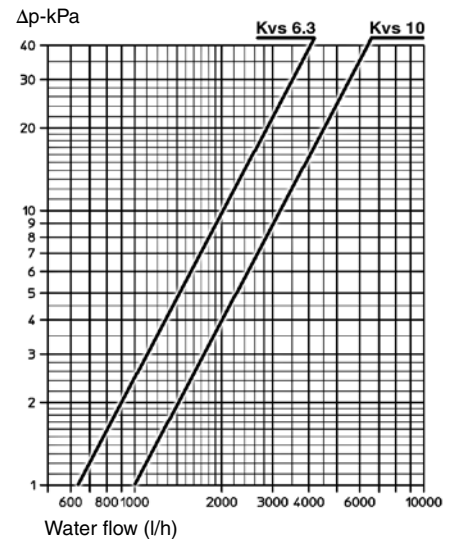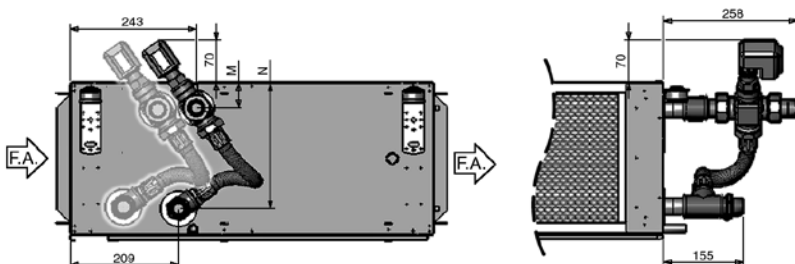

\* The valves can't be used with WM-T and WM-TQR controls.

**TO BE USED ONLY WITH ON/OFF 230 V CONTROLS (QCV-MB, WM-T and WM-TQR)**


**230 V  
main coil kit valve**

3/4" 230 V, ON-OFF valve.





| MODEL        |                  | H  | L   | Ø Connections | Kvs | Code    |
|--------------|------------------|----|-----|---------------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 54 | 245 | 3/4"          | 10  | 9034255 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 54 | 245 | 1"            | 10  | 9034256 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 54 | 295 | 1"            | 10  | 9034256 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 58 | 291 | 1 - 1/4"      | 10  | 9034257 |
| <b>MTL 5</b> |                  | 58 | 367 | 1 - 1/4"      | 10  | 9034257 |
| <b>MTL 6</b> |                  | 59 | 416 | 1 - 1/4"      | 10  | 9034259 |
| <b>MTL 7</b> |                  | 59 | 516 | 1 - 1/4"      | 10  | 9034259 |

**Left connections (standard)**

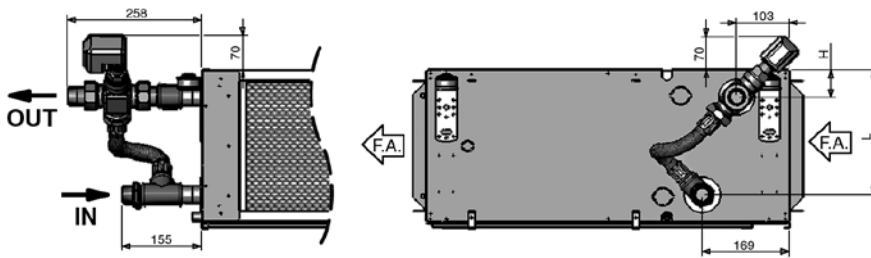

**Right connections (on request)**

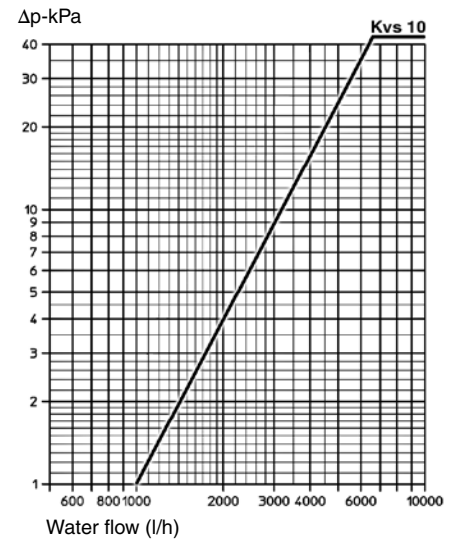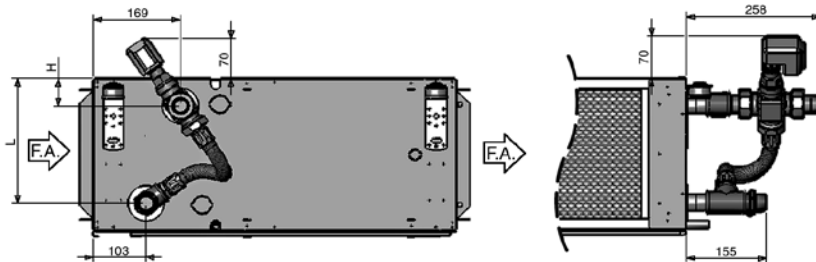


**230 V  
auxiliary coil kit valve**

3/4" 230 V, ON-OFF valve.





| MODEL        |                  | M  | N   | Ø Connections | Kvs | Code    |
|--------------|------------------|----|-----|---------------|-----|---------|
| <b>MTL 1</b> | <b>MTL-ECM 1</b> | 50 | 249 | 3/4"          | 10  | 9034255 |
| <b>MTL 2</b> | <b>MTL-ECM 2</b> | 50 | 249 | 3/4"          | 10  | 9034255 |
| <b>MTL 3</b> | <b>MTL-ECM 3</b> | 50 | 299 | 3/4"          | 10  | 9034255 |
| <b>MTL 4</b> | <b>MTL-ECM 4</b> | 54 | 295 | 1"            | 10  | 9034256 |
| <b>MTL 5</b> |                  | 54 | 370 | 1"            | 10  | 9034256 |
| <b>MTL 6</b> |                  | 55 | 421 | 1"            | 10  | 9034258 |
| <b>MTL 7</b> |                  | 55 | 521 | 1"            | 10  | 9034258 |

**Left connections (standard)**

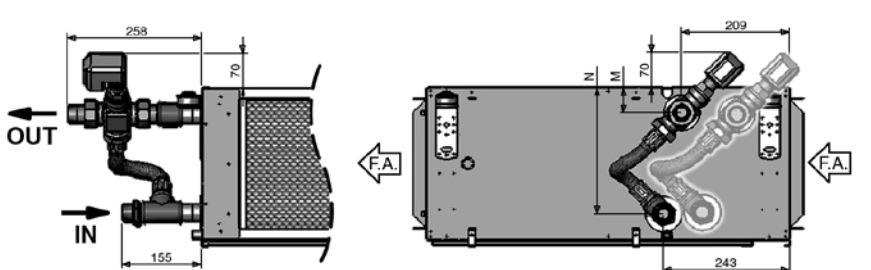

**Right connections (on request)**

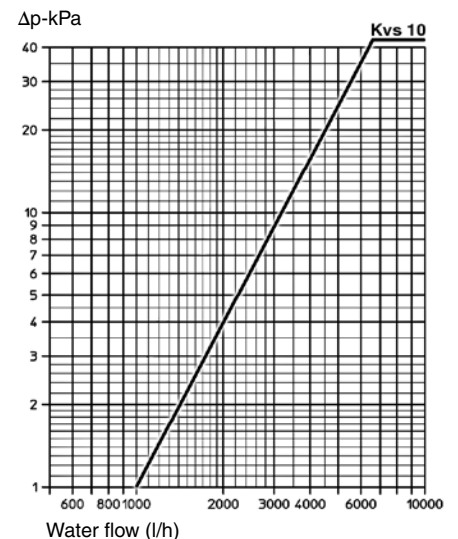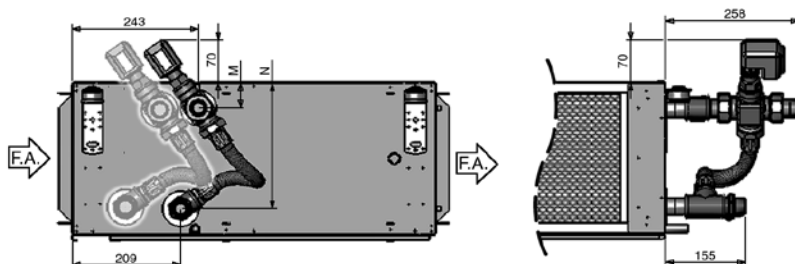



CISQ is a member of



*IQNet, the association of the world's first class certification bodies, is the largest provider of management System Certification in the world. IQNet is composed of more than 30 bodies and counts over 150 subsidiaries all over the globe.*

CERTIFICATO n.  
CERTIFICATE No.

0545/7

SI CERTIFICA CHE IL SISTEMA DI GESTIONE PER LA QUALITÀ DI  
WE HEREBY CERTIFY THAT THE QUALITY MANAGEMENT SYSTEM OPERATED BY

## SABIANA S.p.A.

Sede e Unità Operativa: Via Piave, 53 - 20011 Corbetta (MI)  
Direzione e uffici amministrativi, progettazione, produzione di apparecchiature per il riscaldamento e il condizionamento dell'aria (aerotermi, termostrisce radianti, unità trattamento aria) e canne fumarie.

Unità Operativa: Via Virgilio, 2 - 20013 Magenta (MI)  
Produzione di ventilconvettori, magazzino e logistica

Italia

È CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD

## UNI EN ISO 9001:2015

Sistema di Gestione per la Qualità / Quality Management System

PER LE SEGUENTI ATTIVITÀ / FOR THE FOLLOWING ACTIVITIES

EA: 18

Progettazione, produzione e assistenza di apparecchiature per il riscaldamento e il condizionamento dell'aria (aerotermi, termostrisce radianti, ventilconvettori e unità trattamento aria) e canne fumarie.

*Design, production and service of heating and air conditioning equipment (unit heaters, radiant panels, fan coil units and air handling units) and chimneys.*

Riferirsi alla documentazione del Sistema di Gestione per la Qualità aziendale per l'applicabilità dei requisiti della norma di riferimento.  
Refer to the documentation of the Quality Management System for details of application to reference standard requirements.

Il presente certificato è soggetto al rispetto del documento ICIM "Regolamento per la certificazione dei sistemi di gestione" e al relativo Schema specifico.  
The use and the validity of this certificate shall satisfy the requirements of the ICIM document "Rules for the certification of company management systems" and specific Scheme.

Per informazioni puntuali e aggiornate circa eventuali variazioni intervenute nello stato della certificazione di cui al presente certificato, si prega di contattare il n° telefonico +39 02 725341 o indirizzo e-mail info@icim.it.

For timely and updated information about any changes in the certification status referred to in this certificate, please contact the number +39 02 725341 or email address info@icim.it.

Data emissione  
First issue  
10/06/1996

Emissione corrente  
Current issue  
10/04/2018

Data di scadenza  
Expiring date  
09/04/2021

  
ICIM S.p.A.

Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI)  
www.icim.it



SGQ N° 004 A PRD N° 004 B  
SGA N° 005 D PRS N° 082 C  
SGE N° 005 M ISP N° 046 mc  
SCR N° 006 F ETS N° 003 O  
SSI N° 008 G EMAS N° 001 P

Membro degli Accordi di Mutuo  
Riconoscimento EA, IAF e ILAC  
Signatory of EA, IAF and ILAC Mutual  
Recognition Agreements



www.cisq.com

CISQ è la Federazione Italiana di Organismi di  
Certificazione dei sistemi di gestione aziendale.  
CISQ is the Italian Federation of management  
system Certification Bodies.



THE INTERNATIONAL CERTIFICATION NETWORK

# CERTIFICATE

CISQ/ICIM SPA has issued an IQNet recognized certificate that the organization:

## SABIANA S.p.A.

Head Office and Operative Unit  
Via Piave, 53 - I-20011 Corbetta (MI)  
Operative Unit

Via Virgilio, 2 - I-20013 Magenta (MI)

has implemented and maintains a

## Quality Management System

for the following scope:

**Design, production and service of heating and air conditioning equipment (unit heaters, radiant panels, fan coil units and air handling units) and chimneys.**

which fulfils the requirements of the following standard:

## ISO 9001:2015

Issued on: 2018-04-10

First issued on: 1996-06-10

Expires on: 2021-04-09

*This attestation is directly linked to the IQNet Partner's original certificate and shall not be used as a stand-alone document.*

Registration Number: IT-4000



Alex Stoichitoiu  
President of IQNET



Ing. Claudio Provetti  
President of CISQ

### IQNet Partners\*:

AENOR Spain AFNOR Certification France APCER Portugal CCC Cyprus CISQ Italy  
CQC China CQM China CQS Czech Republic Cro Cert Croatia DQS Holding GmbH Germany FCAV Brazil  
FONDONORMA Venezuela ICONTEC Colombia Inspecta Sertifiointi Oy Finland INTECO Costa Rica  
IRAM Argentina JQA Japan KFQ Korea MIRTEC Greece MSZT Hungary Nemko AS Norway NSAI Ireland  
NYCE-SIGE Mexico PCBC Poland Quality Austria Austria RR Russia SII Israel SIQ Slovenia  
SIRIM QAS International Malaysia SQS Switzerland SRAC Romania TEST St Petersburg Russia TSE Turkey YUQS Serbia  
IQNet is represented in the USA by: AFNOR Certification, CISQ, DQS Holding GmbH and NSAI Inc.

\* The list of IQNet partners is valid at the time of issue of this certificate. Updated information is available under [www.iqnet-certification.com](http://www.iqnet-certification.com)



A company of Arbonia Group  
**ARBONIA** ▲

Seguici su



Sabiana app



---

**SABIANA SpA**

Società a socio unico

Via Piave 53 - 20011 Corbetta (MI) Italy

T. +39 02 97203 1 r.a. • F. +39 02 9777282

info@sabiana.it

**www.sabiana.it**